

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Enhancement for rate 1, 4-transmit antenna STC	
Date Submitted	2004-11-04	
Source(s)	Jianzhong (Charlie) Zhang, Kiran Kuchi, Anthony Reid, Nico Van Waes	Voice: 972-374-0958, 972-374-1862, Fax: 972-894-5937 charlie.zhang@nokia.com , kiran.kuchi@nokia.com
	Nokia 6000 Connection Drive Irving, TX 75039	
	Chan-Byoung Chae, Wonil Roh, , Sung-Ryul Yun, Hongsil Jeong, JeongTae Oh, Kyunbyoung Ko, Seungjoo Maeng, Panyuh Joo, Jaeho Jeon, Jerry Kim, Soonyoung Yoon Samsung Electronics Co., Ltd.	cb.chae@samsung.com Voice: +82-31-279-4828
	Young-Ho Jung, Seung Hoon Nam, Jaehak Chung, Yungsoo Kim Samsung Advanced Institute of Technology	
Re:	IEEE 802.16e D4 Draft	
Abstract	Proposes an enhancement to rate 1, 4-transmit antenna space time code	
Purpose	To incorporate the changes proposed here into the 802.16e D5 Draft.	

Notice	<p>This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.</p>
Release	<p>The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.</p>
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:chair@wirelessman.org> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>

Enhancement for rate 1, 4 transmit antenna STC

Jianzhong (Charlie) Zhang, Kiran Kuchi, Tony Reid, Nico Van Waes

Nokia

1. Background

The 802.16e standard defines a rate 1, 4-antenna space-time-frequency code of form

$$\mathbf{A} = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ S_2 & S_1^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ 0 & 0 & S_4 & S_3^* \end{bmatrix},$$

Where the consecutive columns of the code span two OFDMA symbols and two sub-carriers respectively. The diversity order for this code is 2, if coding is not considered. However, with sufficient coding, code \mathbf{A} is capable of attaining a diversity of order 4. In this proposal we propose a modification to the 4-antenna matrix \mathbf{A} , which increases the coding gain up to 0.7 dB. The proposed enhancement requires few changes to the transceiver specification.

2. Pair Wise Error Probability for 4-antenna Code

The signal model over two OFDMA symbols¹ and a pair of frequencies can be presented in matrix form as,

$$\mathbf{y} = \mathbf{A}^T \mathbf{h} + \mathbf{n}$$

where $\mathbf{h} = [h_1, h_2, h_3, h_4]$ are assumed to be frequency-flat channel coefficients, \mathbf{n} is a column vector composed of AWGN noise samples of variance N_0 per dimension. The modulation symbols S_k are coded across space-time-frequency dimensions. Under the assumption of ML decoding, the pair wise error probability of the 4-antenna code in AWGN channels can be upper bounded as,

$$P(c \rightarrow e) \leq E \left[Q \left(\sqrt{\frac{\mathbf{h}^H \mathbf{D} \mathbf{h}}{N_0}} \right) \right],$$

Where expectation operation E is performed over the channel statistics. The diagonal matrix \mathbf{D} contains the Hamming distances² seen by each channel coefficient along the error event path. Due to the presence of

¹ The channel is assumed to be time invariant within two OFDMA symbols

orthogonal STBC, the diagonal entries of $\mathbf{D} = \text{diag}[d_1, d_1, d_2, d_2]$ appear in pairs. In other words, among the four space-time-frequency symbols, pairs of symbols experience the same channel due to STBC encoding.

Diversity Order:

The diversity order for the 4-antenna code is determined by the rank of \mathbf{D} . The presence of STBC ensures a minimum diversity of order 2. Full, 4th order diversity requires a powerful channel code. In the present case, a rate 1/2 binary convolutional code should be able to provide full 4th order diversity.

Coding Gain:

The following can maximize both diversity and coding gain of the presented code:

- Maximize the trace of \mathbf{D} i.e.,

$$d_{\max}^H = \max \text{Trace}[\mathbf{D}].$$

- Ensure the diagonal entries of \mathbf{D} are as nearly equal as possible.

The best possible choice for the 4-antenna code is force $d_1 = d_2$, which corresponds to the maximizing both diversity and coding gain. In practice, it is difficult to design codes with equal hamming distances for all error events, but one could always try to make them as nearly equal as possible. The condition $d_1 \neq d_2$ implies a reduction in coding gain. This loss is severe especially when there is a large imbalance between d_1 , and d_2 . In the following, we present a simple antenna circulation operation as a remedy for reducing the imbalance between the diagonal entries of \mathbf{D} , thus maximizing the coding gain.

2.1 Antenna Circulation

We propose that we switch the assignment of rows of matrix \mathbf{A} according to a predetermined pattern. The switching is performed in time-frequency dimensions. We propose the following antenna assignment be performed periodically every N sub carriers, where N is design parameter.

² In this case both Hamming distance and Euclidean distances are synonymously used. The notation is exact is for QPSK modulation. For higher order constellations, Euclidean distance is more appropriate criterion.

$$\mathbf{A}_1 = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ S_2 & S_1^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ 0 & 0 & S_4 & S_3^* \end{bmatrix}, \quad \mathbf{A}_2 = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ S_2 & S_1^* & 0 & 0 \\ 0 & 0 & S_4 & S_3^* \end{bmatrix}, \quad \mathbf{A}_3 = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ 0 & 0 & S_4 & S_3^* \\ S_2 & S_1^* & 0 & 0 \end{bmatrix}.$$

The pair-wise error probability for the circulated code takes the form:

$$P(c \rightarrow e) \leq E \left[Q \left(\sqrt{\frac{\mathbf{h}^H \Lambda \mathbf{h}}{N_0}} \right) \right]$$

where Λ is diagonal matrix with entries, $\Lambda = \text{Diag}[\tilde{d}_1, \tilde{d}_2, \tilde{d}_3, \tilde{d}_4]$. Unlike the non-circulated case, Λ now contains distinct diagonal entries, and better approximates the equal Hamming distance criterion, thus offering an increase in coding gain. Note that the circulation principle applies to 3-antenna case as well.

3. Performance

In Figure 1, we compared the FER performance of the circulated code to Matrix A for 4 Tx and 1 Rx case in for Ped B channel, rate 1/2 convolutional code, QPSK modulation. We notice a coding gain of up to 0.7 dB. Similar gains are observed for other modulation and coding modes.

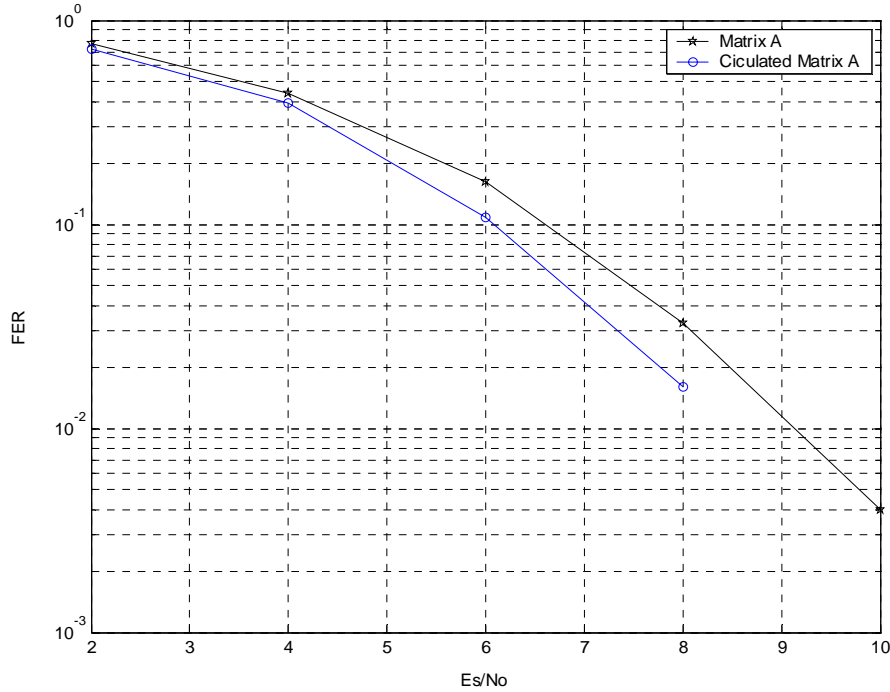


Figure1: FER performance of rate 1, circulated matrix A

4. Proposed Text Change

8.4.8.3.5 Transmission schemes for 4-antenna BS

The proposed Space-Time-Frequency code (over two OFDMA symbols and two sub-carriers) for 4Tx-Rate 1 configuration with diversity order 4 is given in three permuted versions:

$$\mathbf{A}_1 = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ S_2 & S_1^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ 0 & 0 & S_4 & S_3^* \end{bmatrix}, \mathbf{A}_2 = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ S_2 & S_1^* & 0 & 0 \\ 0 & 0 & S_4 & S_3^* \end{bmatrix}, \mathbf{A}_3 = \begin{bmatrix} S_1 & -S_2^* & 0 & 0 \\ 0 & 0 & S_3 & -S_4^* \\ 0 & 0 & S_4 & S_3^* \\ S_2 & S_1^* & 0 & 0 \end{bmatrix}.$$

The choice of subscript k to determine the matrix \mathbf{A}_k is given by the following formula: $k = \text{mod}(\text{logical data sub carrier number for first tone of code}, 3) + 1$. where $\text{logical data sub carrier number for first tone of code} = 1, 2, 3, \dots, \text{Total \# of data sub-carriers}$.

5. References

- [1] V. Tarokh, N. Seshadri, and A.R. Calderbank, “ Space-Time Codes for High Data Rate Communication: Performance Criterion and Code Construction”, IEEE Transactions on Information Theory, vol. 44, pp. 744-765, 1998.
- [2] IEEE P802.16-REVd/D5-2004 Draft standards for local and metropolitan area networks part 16: Air interface for fixed broadband wireless access systems.