


Practical Implementation of EPON ONU Management using OAM over VLC


Desired Behavior

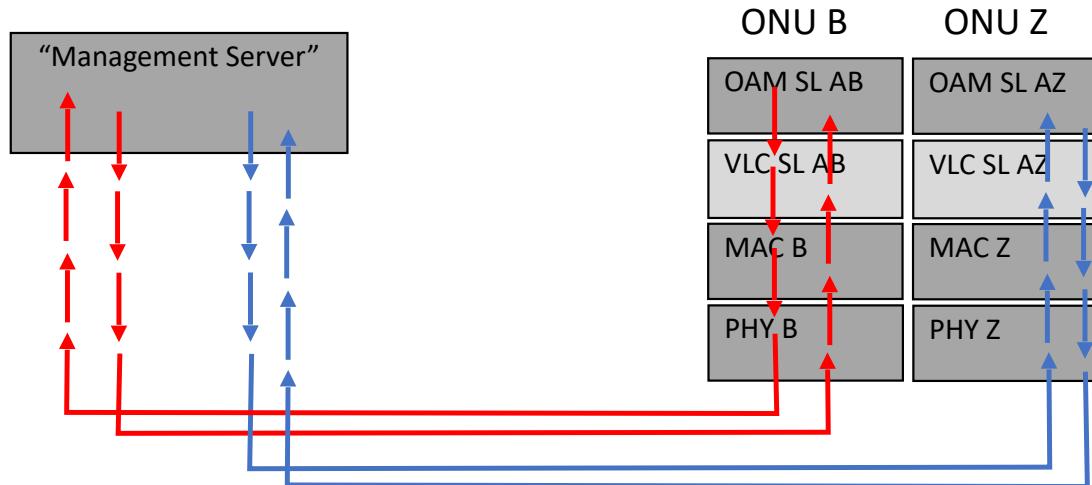

- Single Management Server should be able to manage multiple EPON ONUs using OAM over VLC
- VLC is implemented as a software program running on the server

Implementation Idea 1

- VLC Sublayer is implemented as a software program running on the server
- From a software and resource efficiency perspective, a single instance of VLC in the manager would be good
- VLC Rules have no way to distinguish between OAM AB and OAM AZ as sources, so there is no way to steer OAM into the correct tunnel

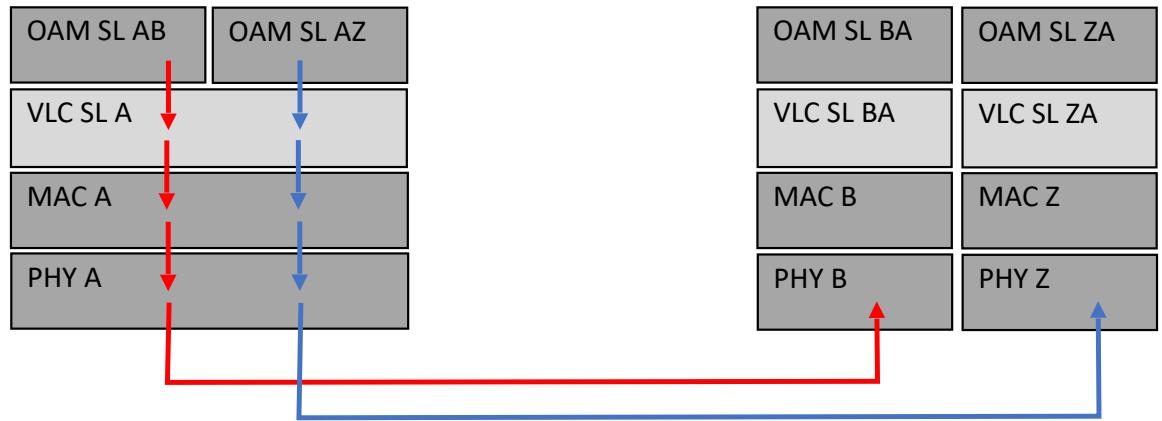

Egress Rule 1 in VLC SL A:

```
IF FID_DST_ADDR==SP_ADDR AND FID_LEN_TYPE==ETHERTYPE_SP  
AND FID_SUBTYPE==SUBTYPE_OAM
```

```
THEN REPLACE(FID_DST_ADDR, Z) AND REPLACE(FID_LEN_TYPE,  
ETHERTYPE_VLC)
```


Egress Rule 2 in VLC SL A:

```
IF FID_DST_ADDR==SP_ADDR AND FID_LEN_TYPE==ETHERTYPE_SP  
AND FID_SUBTYPE==SUBTYPE_OAM
```

```
THEN REPLACE(FID_DST_ADDR, B) AND REPLACE(FID_LEN_TYPE,  
ETHERTYPE_VLC)
```

Implementation Idea 2

- Alternative: Multiple VLC instances
running in software (separate processes, separate threads, or simply separate sockets)
- Egress from Manager - Works
- Ingress to Manager - How does MAC A know which VLC SL receives incoming VLC PDU?
- This approach doesn't work

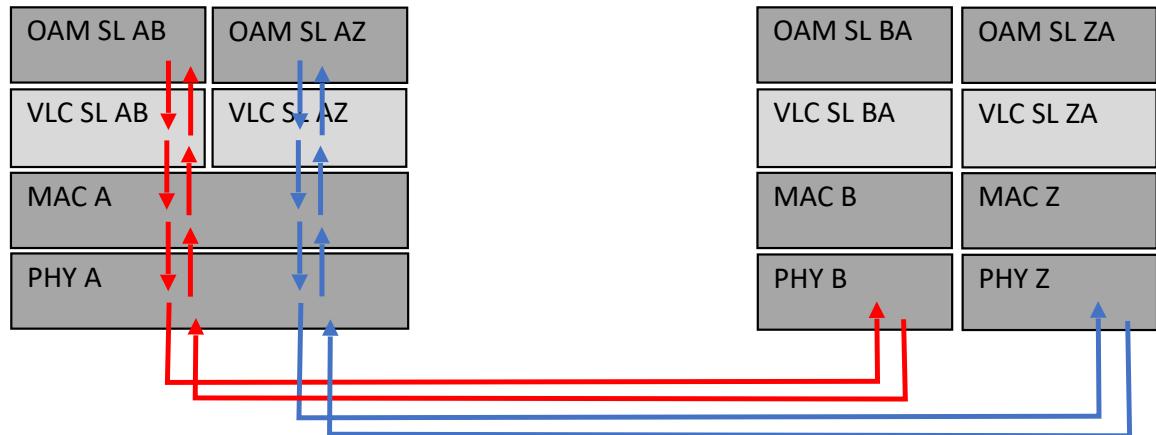

Egress Rule 1 in VLC SL AZ:

```
IF FID_DST_ADDR==SP_ADDR AND FID_LEN_TYPE==ETHERTYPE_SP  
AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, Z) AND REPLACE(FID_LEN_TYPE,  
ETHERTYPE_VLC)
```

Ingress Rule 1 in VLC SL AZ:

```
IF FID_SRC_ADDR==Z AND FID_LEN_TYPE==ETHERTYPE_VLC AND  
FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, SP_ADDR) AND  
REPLACE(FID_LEN_TYPE, ETHERTYPE_SP)
```

Egress Rule 1 in VLC SL AB:

```
IF FID_DST_ADDR==SP_ADDR AND FID_LEN_TYPE==ETHERTYPE_SP  
AND FID_SUBTYPE==SUBTYPE_OAM
```


```
THEN REPLACE(FID_DST_ADDR, B) AND REPLACE(FID_LEN_TYPE,  
ETHERTYPE_VLC)
```

Ingress Rule 1 in VLC SL AB:

```
IF FID_SRC_ADDR==Z AND FID_LEN_TYPE==ETHERTYPE_VLC AND  
FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, SP_ADDR) AND  
REPLACE(FID_LEN_TYPE, ETHERTYPE_SP)
```

Implementation Idea 3

- Alternative: Multiple VLC instances running in software (separate processes, separate threads, or simply separate sockets) with multiple “virtual” MACs.
- This approach works...

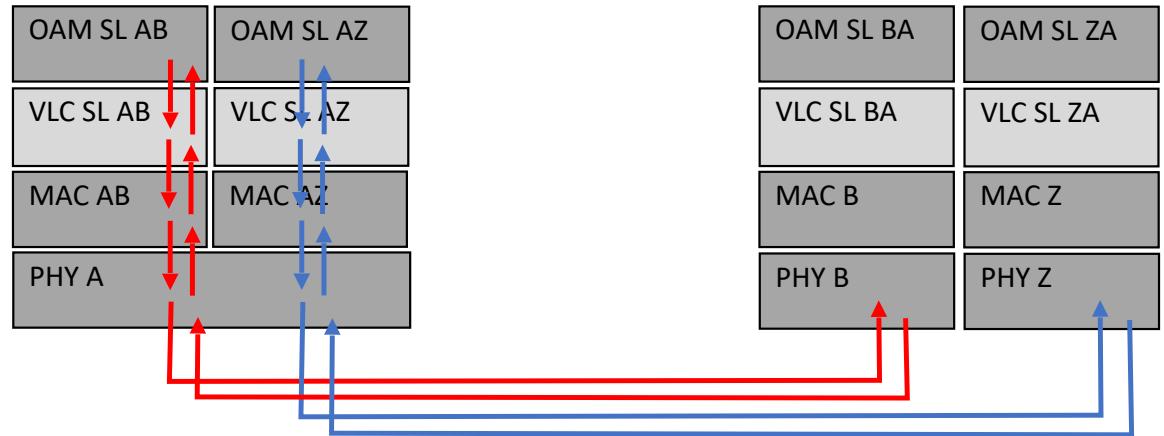

Egress Rule 1 in VLC SL AZ:

```
IF FID_DST_ADDR==SP_ADDR AND FID_LEN_TYPE==ETHERTYPE_SP
AND FID_SUBTYPE==SUBTYPE_OAM
THEN REPLACE(FID_DST_ADDR, Z) AND REPLACE(FID_LEN_TYPE,
ETHERTYPE_VLC)
```

Ingress Rule 1 in VLC SL AZ:

```
IF FID_SRC_ADDR==Z AND FID_LEN_TYPE==ETHERTYPE_VLC AND
FID_SUBTYPE==SUBTYPE_OAM
THEN REPLACE(FID_DST_ADDR, SP_ADDR) AND
REPLACE(FID_LEN_TYPE, ETHERTYPE_SP)
```

Egress Rule 1 in VLC SL AB:


```
IF FID_DST_ADDR==SP_ADDR AND FID_LEN_TYPE==ETHERTYPE_SP
AND FID_SUBTYPE==SUBTYPE_OAM
```

```
THEN REPLACE(FID_DST_ADDR, B) AND REPLACE(FID_LEN_TYPE,
ETHERTYPE_VLC)
```

Ingress Rule 1 in VLC SL AB:

```
IF FID_SRC_ADDR==Z AND FID_LEN_TYPE==ETHERTYPE_VLC AND
FID_SUBTYPE==SUBTYPE_OAM
THEN REPLACE(FID_DST_ADDR, SP_ADDR) AND
REPLACE(FID_LEN_TYPE, ETHERTYPE_SP)
```

Implementation Idea 3 (continued)

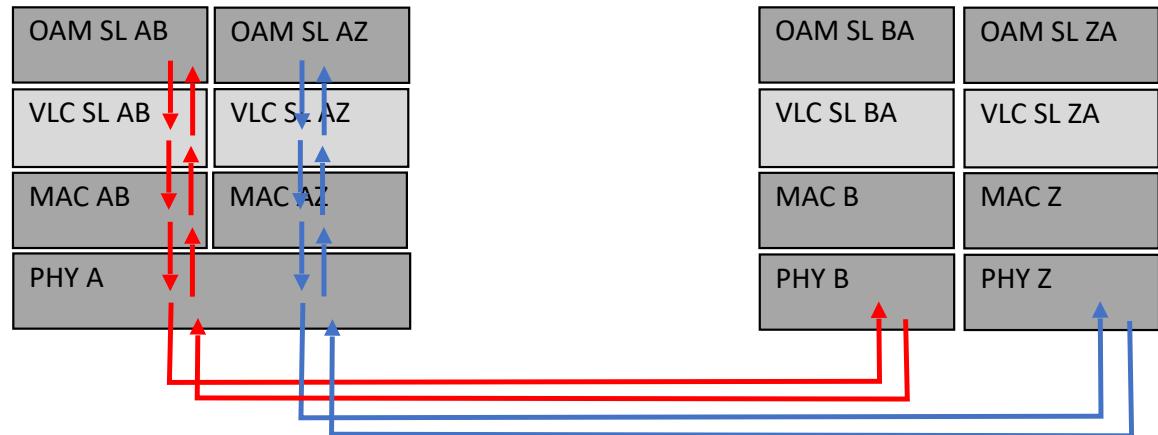

- This approach works, but does it scale?
 - One server managing a single PON with 128 ONUs requires 128 MACs, each with its own MAC address
 - A single OLT system (S-OLT) might have >64 PON ports
 - A single server serving a typical S-OLT would need $128 \times 64 = 8192$ MACs, each with its own MAC address
 - This is very tedious to manage making it impractical

Implementation Idea 4

- What if VLC is in the bridge?
 - Scaling on the server is still impractical, but that's no longer a VLC problem.
 - Rules that can be applied on the bridge are able to handle this situation better.
- There are no “hardware” bridges capable of this today
- Requires that the bridge-to-manager OAMPDUs be addressed to the individual MAC address

Ingress Rule 1 in VLC SL X:

```
IF FID_DST_ADDR==SP_ADDR AND FID_SRC_ADDR==AB AND FID_LEN_TYPE==ETHERTYPE_SP AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, B) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_VLC)
```

Ingress Rule 2 in VLC SL X:


```
IF FID_DST_ADDR==SP_ADDR AND FID_SRC_ADDR==AZ AND FID_LEN_TYPE==ETHERTYPE_SP AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, Z) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_VLC)
```

Egress Rule 1 in VLC SL X:

```
IF FID_SRC_ADDR== B AND FID_LEN_TYPE== ETHERTYPE_VLC AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, AB) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_OAM)
```

Egress Rule 1 in VLC SL X:

```
IF FID_SRC_ADDR== Z AND FID_LEN_TYPE== ETHERTYPE_VLC AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, AZ) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_OAM)
```

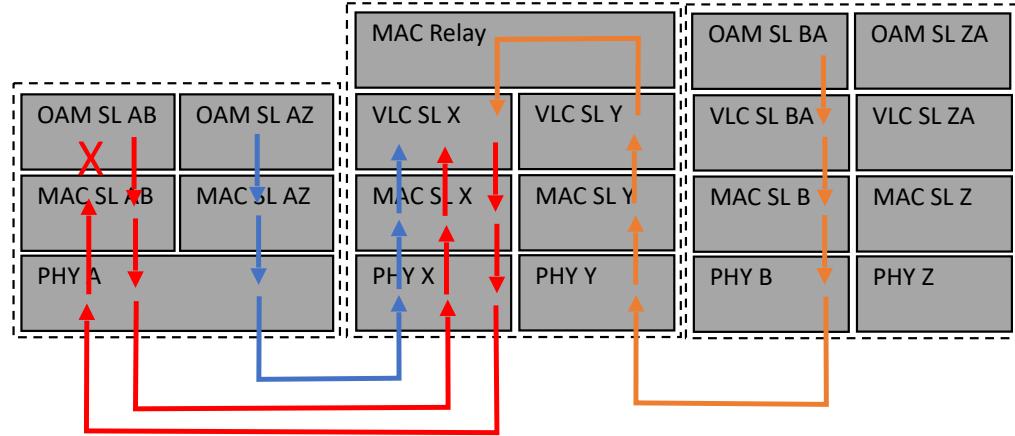


802.3CL57 → NO

IS THIS LEGAL? Will the receiving OAM sublayer accept the OAMPDU without DST_MAC_ADDR == SP_MAC_ADDR?

Implementation Idea 5

- What if VLC is in the bridge and the bridge is in the server?
- Bridge is implemented in software, so no dependencies on availability hardware-based bridge
- Still requires that the OAMPDU VLC SL X to OAM SL AB or OAM SL AZ use individual MAC address

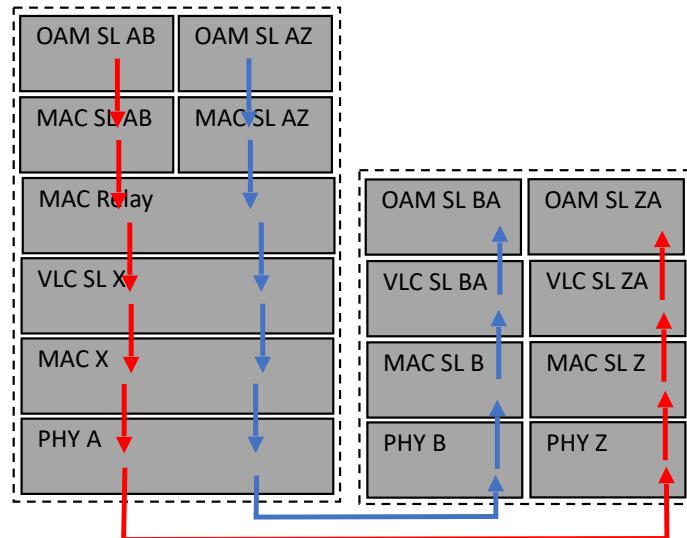

Egress Rule 1 in VLC SL X:

```
IF FID_DST_ADDR==SP_ADDR AND FID_SRC_ADDR==AB AND FID_LEN_TYPE==ETHERTYPE_SP AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, B) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_VLC)
```

Egress Rule 2 in VLC SL X:

```
IF FID_DST_ADDR==SP_ADDR AND FID_SRC_ADDR==AZ AND FID_LEN_TYPE==ETHERTYPE_SP AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, Z) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_VLC)
```

Ingress Rule 1 in VLC SL X:

```
IF FID_SRC_ADDR== B AND FID_LEN_TYPE== ETHERTYPE_VLC AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, AB) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_OAM)
```

Ingress Rule 1 in VLC SL X:

```
IF FID_SRC_ADDR== Z AND FID_LEN_TYPE== ETHERTYPE_VLC AND FID_SUBTYPE==SUBTYPE_OAM  
THEN REPLACE(FID_DST_ADDR, AZ) AND REPLACE(FID_LEN_TYPE, ETHERTYPE_OAM)
```

Still a problem: OAMPDU doesn't have
DST_MAC_ADDR == SP_MAC_ADDR?

Implementation Idea 6

- VLC instance on each “virtual” MAC
- This is effectively the same as Idea 3 with the same outstanding question:
 - Is there anything that we can do in VLC to enable an implementation that is more easily scaled to support management of many CPE devices?

