

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Sleep Mode Operations in MR Network for Centralized Scheduling Approach	
Date Submitted	2007-01-08	
Source(s)	<p>Shiao-Li Tsao, Fang-Ching Ren, I-Kang Fu, Wern-Ho Sheen National Chiao Tung University (NCTU) /Industrial Technology Research Institute (ITRI), Taiwan No. 195, Sec. 4, Chung Hsing Rd., Chutung, Hsinchu, Taiwan 310, R.O.C.</p> <p>Yuefeng Zhou; Mike Hart; Sunil Vadgama Fujitsu Laboratories of Europe Ltd Hayes Park Central, Hayes End Road, Hayes, Middlesex, UB4 8FE, UK</p> <p>Keiichi Nakatsugawa Fujitsu Laboratories Ltd. Kamikodanaka 4-1-1, Kawasaki, 211-8588, Japan</p> <p>Yousuf Saifullah, Shashikant Maheshwari, Haihong Zheng Nokia 6000 Connection Drive, Irving, TX</p> <p>Kanchei (Ken) Loa, Yi-Hsueh Tsai, Shiann-Tsong Sheu, Hua-Chiang Yin, Chih-Chiang Hsieh, Yung- Ting Lee, Frank C.D. Tsai, Heng-Iang Hsu, Youn- Tai Lee, Institute for Information Industry, 8F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan.</p>	<p>Voice:+886-3-5712121-54717 Fax:+886-3-5721490 E-mail: sltsao@cs.nctu.edu.tw, frank_ren@itri.org.tw</p> <p>Voice: +44 (0) 20 8573 4444 FAX: +44 (0) 20 8606 4539 Email: Yuefeng.zhou@uk.fujitsu.com, Mike.hart@uk.fujitsu.com, Sunil.vadgama@uk.fujitsu.com</p> <p>Voice: +81-44-754-2811 Fax: +81-44-754-2786 nakatsugawa@jp.fujitsu.com</p> <p>Voice: +1 (0) 972 894 5000 Email: Yosuf.saifullah@nokia.com, Shashikant.maheshwari@nokia.com, Haihong.l.zheng@nokia.com</p> <p>Voice: +886-2-27399616 FAX: +886-2-23782328 Email: Loa@nmi.iii.org.tw</p>
Re:	IEEE 802.16j-06/027:“Call for Technical Proposals regarding IEEE Project P802.16j”	
Abstract	This document presents sleep mode and idle mode operations for IEEE 802.16j. The existing IEEE 802.16e messages are reused and new parameters are introduced in order to facilitate the sleep mode and idle mode management in IEEE 802.16j.	
Purpose	Propose the sleep mode and idle mode operations for IEEE 802.16j	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole	

discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent
Policy and
Procedures

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://ieee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

Sleep Mode Operations in MR Network for Centralized Scheduling Approach

Introduction

In WiMAX MR networks, the RS may use two types of scheduling. Centralized Scheduling, where MR-BS controls all the radio resource scheduling and MAP allocation. Distributed Scheduling, where some functionality of radio resource scheduling and MAP allocation are distributed to RS. This contribution proposes text to clarify the MS sleep mode for the centralized scheduling approach only.

I. Centralized Scheduling Approach

The sleep mode is centrally controlled by MR-BS. For example, the MS sleep-mode should be approved by the MR-BS, and MR-BS determines the duration of sleep, listening windows, and other properties of MS sleep mode. The RS simply relays the sleep mode messages, such as MOB_SLP-REQ/RSP, and traffic indication, and it does not maintain any state information of sleep-mode MSs, which means the MS sleep mode does not need any extra functionalities from RS.

While sending MOB_TRF-IND to MSs for indicating incoming packets, MR-BS should take processing and scheduling delays introduced by RSs into the consideration. As shown in Fig. 1, MS enters Sleep mode by sending MOB_SLP-REQ and receiving MOB_SLP-RSP message with “Start Frame Number” parameter from MR-BS. While the MR-BS decides to send MOB_TRF-IND message to the MS which wakes up at frame F_i , the MOB_TRF-IND message should be sent from MR-BS $\sum_{i=1}^N D_i$ frames before the frame F_i . D_i is the processing and scheduling delay introduced by the i^{th} RS.

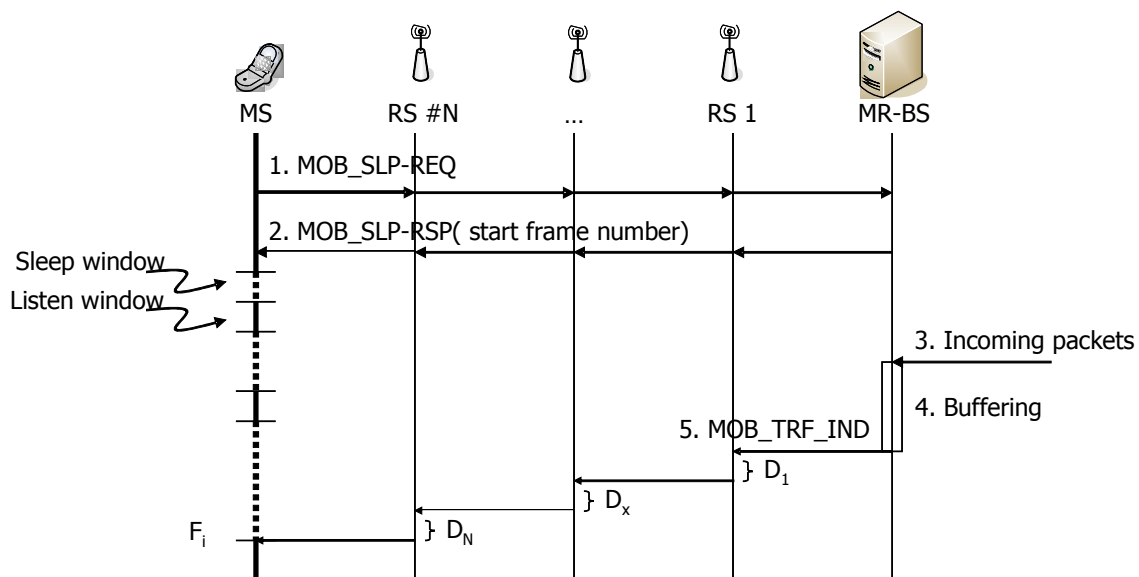


Figure 1. MS sleep mode support for centralized scheduling

Proposed Text

-----Start of the Text-----

6.3.21.7 Relay support for MS sleep mode

MS sleep mode should be supported in an MR network for both centralized and decentralized scheduling approaches. In MR networks, the sleep mode shall be centrally controlled by the MR-BS in the presence of centralized or distributed scheduling.

6.3.21.7.1 MS sleep mode support for centralized scheduling approach

MS sleep mode, for the MS attached through an RS, works as in the section 6.3.21. RS only relays the signaling and doesn't need any additional functionality for supporting sleep mode procedure. All MOB_SLP-REQ messages generated by MSs shall be relayed by RSs to the MR-BS. The MR-BS shall be responsible for generating MOB_SLP-RSP messages, which will be relayed by RSs, either in response to a MOB_SLP-REQ or unsolicited. The MR-BS shall take the additional relay delay into account while it forwards the packets through RS.

-----End of the Text-----

References

- [1] IEEE Standard 802.16-2004, Air Interface for Broadband Wireless Access Systems, 2004.
- [2] IEEE Standard 802.16e-2005, Air Interface for Fixed and Mobile Broadband Wireless Access Systems; Amendment 2: Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands, 2005.
- [3] WiMAX End-to-End Network Systems Architecture (Stage 2: Architecture Tenets, Reference Model and Reference Points, WiMAX Forum Draft Document, Aug. 2006.
- [4] WiMAX End-to-End Network Systems Architecture (Stage 3: Detailed Protocols and Procedures), WiMAX Forum Draft Document, Aug. 2006.
- [5] Harmonized definitions and terminology for 802.16j Mobile Multihop Relay, IEEE 802.16j-06/014r1.
- [6] Table of Contents of Task Group Working Document, IEEE 802.16j-06/017r2.
- [7] Yousuf Saifullah, Shashikant Maheshwari, Haihong Zheng, Kanchei (Ken) Loa, Hua-Chiang Yin, Yi-Hsueh Tsai, Shiann Tsong Sheu, "Sleep Mode with RS," IEEE C802.16j-06/209r2, 2006-11-13.
- [8] Keiichi Nakatsugawa, Yuefeng Zhou, Shiao-Li Tsao, Fang-Ching Ren, Wern-Ho Sheen, I-Kang Fu, "A proposal for timing compensation of sleep mode in MR," IEEE C802.16j-06/131r1, 2006-11-15.
- [9] Yuefeng Zhou, Mike Hart, Sunil Vadgama, Shiao-Li Tsao, Fang-Ching Ren, Wern-Ho Sheen, I-Kang Fu, "Obtaining Sleep Mode Information in RS," IEEE C802.16j-06/136r6, 2006-11-16.
- [10] Shiao-Li Tsao, Fang-Ching Ren, Jen-Shun Yang, Wern-Ho Sheen, I-Kang Fu, Tzu-Ming Lin, Chie Ming Chou and Ching-Tarn Hsieh, "Sleep Mode and Idle Mode Operations for IEEE 802.16j," IEEE C802.16j-06/173, 2006-11-07.