

Issues and Scope of MMR

Document Number:

IEEE C802.16mmr-05/037r1

Date Submitted:

2005-11-17

Source:

Yousuf Saifullah, Yogesh Swami, Charlie Zhang, Haihong Zheng

Voice: [972 894 5000]

Nokia

Fax: [+1-972 894 5937]

6000 Connection Drive

E-mail: [yousuf.saifullah@nokia.com, yogesh.swami@nokia.com]

Irving, TX 75039, USA

[charlie.zhang@nokia.com, haihong.zheng@nokia.com]

Venue:

IEEE 802.16 Session #40, Vancouver, Canada.

Base Document:

None

Purpose:

This is a response to http://iee802.org/16/sg/mmr/docs/80216mmr-05_021.pdf (call for contributions: IEEE 802.16's Mobile Multi-hop Relay Study Group) to present some discussion material.

Notice:

This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.


IEEE 802.16 Patent Policy:

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://iee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://iee802.org/16/ipr/patents/notices>>.


Introduction

- Provides input on scope of the work in MMR SG
- Attempts to describe possible approach for solving RS problem
- Suggests to simplify RS problem space for cheaper RS
- Topics for discussion
 - Security
 - Same Frame or Different Frame Relay
 - Mobile RS

Security Issues

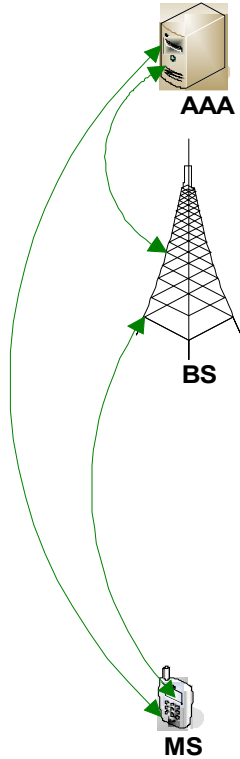

Current 3-party security model

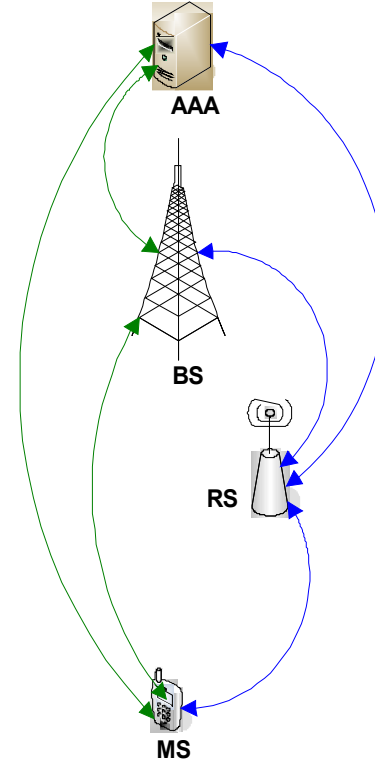

With RS, it will become 4-party security model

Impact of RS on PKM

- From key management perspective, adding one RS, will convert the security problem into a 4 party model.
- In the 4 party model, the following security associations need to exist for ensuring trust and distributing session keys:
 - **AAA** $\leftarrow \rightarrow$ **RS**: *New*
 - **AAA** $\leftarrow \rightarrow$ **BS**: *Existing*
 - **AAA** $\leftarrow \rightarrow$ **MS**: *Existing*
 - **BS** $\leftarrow \rightarrow$ **RS**: *Existing*
 - **RS** $\leftarrow \rightarrow$ **MS**: *New*
 - **MS** $\leftarrow \rightarrow$ **BS**: *Existing*
- Channel binding will be needed in the 4 party model
- Given the complexity of 4 party model, and the requirement that AAA server maintains a secure tunnel between each middle-party (be it BS or RS), it's better to minimize the RS involvement in the security mechanisms.
- RS could be involved in traffic encryption and message authentication

Impact of RS on the Traffic Encryption


- We can keep traffic encryption/decryption in the BS and MS, the RS doesn't need to take part in the traffic encryption
- The advantage of this approach is that RS doesn't require key-exchange and any new security association between the AAA-server and RS, and doesn't suffer from the channel binding concerns of the "four-party" model.

Impact of RS on the Message Authentication


- Even with minimal functionality on RS, certain management messages (e.g. RNG-REQ/RSP) still need to be authenticated between the RS and MS
- Moreover, there would be some messaging between RS and BS
- This may require a mechanism at RS for message authentication.

Possible Approaches for Relaying

Same Frame Relay

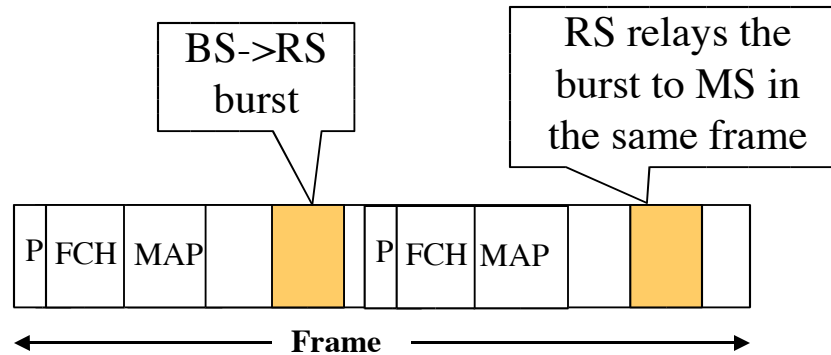

Different Frame Relay

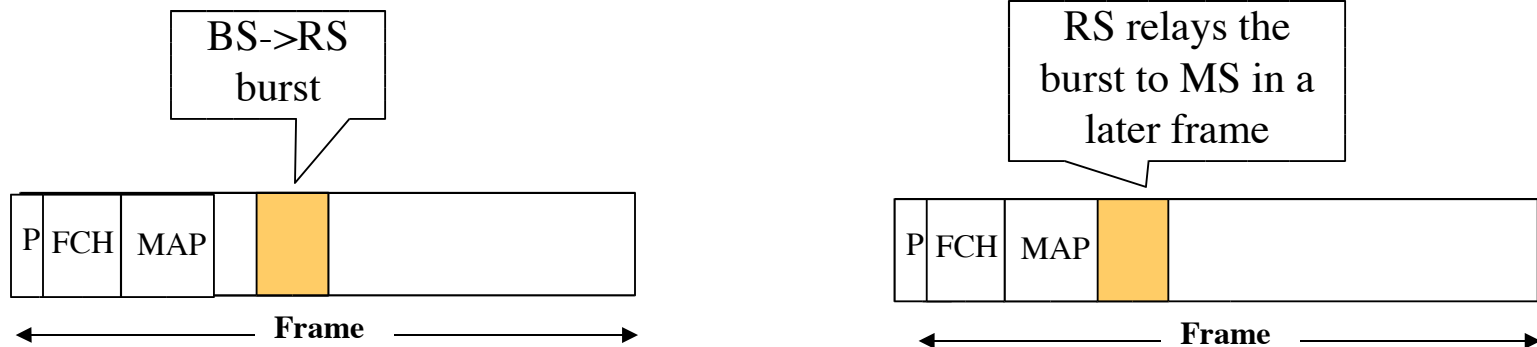

Same Frame Relay vs. Different Frame Relay

Same Frame Relay


- + Scheduling is centralized at the BS: BS schedules for BS \leftrightarrow RS, and also for RS \leftrightarrow MS
- + BS provides MAP for RS also, alleviates RS from managing MAP allocation
- + QoS setup between BS and MS is not impacted with the addition of RS.
- + BS and RS transfer frame within a frame boundary. In this way relaying doesn't increase delay beyond the frame size.
- + Fast feedback can be delivered within one frame

Different Frame Relay

- Scheduling is distributed: BS schedules for BS \leftrightarrow RS, and RS schedules for RS \leftrightarrow MS
- BS provides MAP for BS \leftrightarrow RS, and RS needs to provide MAP for RS \leftrightarrow MS.
- Requires QoS setup on each hop.
- RS receives frame and then relays bursts in a later frame. Adds delay in frame transfer. Delay increases with the number of hops.
- Fast Feedback may have to go through multiple frames, could become slow

- A simpler RS can be achieved with the same frame relay
- Different frame relay adds more issues and consideration


Mobile RS

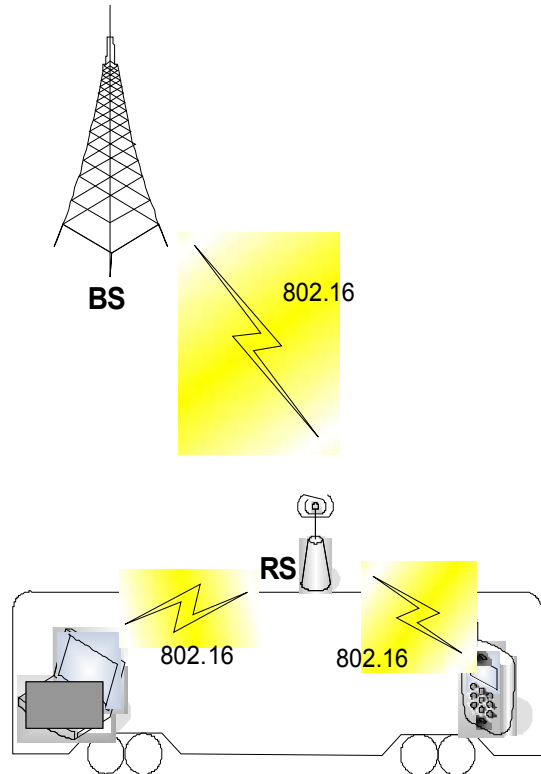

- Mobility of RS means that 802.16 air interface is also on the MS/SS side
- Mobile 802.16 RS may make sense, when an RS is moving with its associated MS/SS, e.g. on a bus or boat.... Continued

Do we need Mobile RS?

- However, in such use cases, an 802.16 MS with 802.11 (WLAN) interface towards the clients is more feasible
- 802.11 is suitable because it is designed for local area coverage.
- This is not an extending coverage case, 802.16 client could simply connect to the BS directly
- Therefore, suggestion is to consider only fixed RS in the scope of MMR
- Earlier contributions, in the MMR SG, also demonstrated a decrease in throughput if the RS is not positioned at an optimal location.

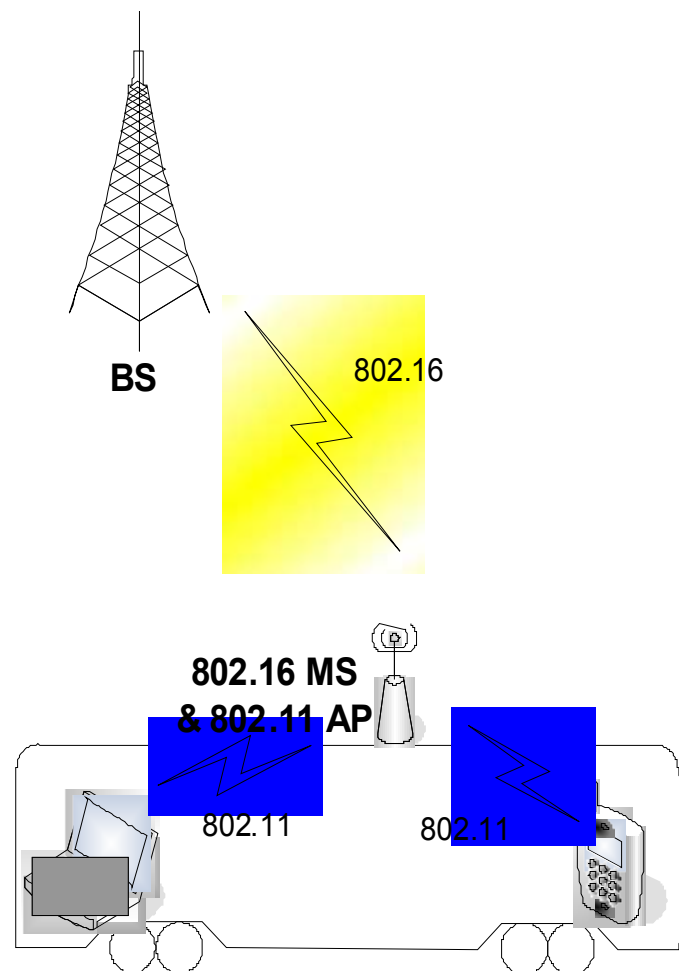

Summary

- We need to resolve security issues with the addition of RS
- Same Frame Relay simplifies functionalities in RS
- Fixed or Nomadic RS is appropriate for extending coverage and maximizing throughput