

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Proposal for a new PDU concatenation scheme to facilitate MAC PDU separation under error conditions</b>	
Date Submitted	<b>2004-03-13</b>	
Source(s)	<p>Sunny Chang, Bonggee Song, Taein Hyon, Yunsang Park</p> <p>Samsung Electronics 416, Maetan-3dong, Paldal-gu Suwon-si, Gyeonggi-do Korea</p>	<p>Voice: [82-31-279-5286] Fax: [82-31-279-5515] <a href="mailto:sunny94@samsung.com">sunny94@samsung.com</a>, <a href="mailto:bonggee.song@samsung.com">bonggee.song@samsung.com</a>, <a href="mailto:taein.hyon@samsung.com">taein.hyon@samsung.com</a>, <a href="mailto:yunsang.park@samsung.com">yunsang.park@samsung.com</a></p>
Re:	New PDU concatenation scheme for IEEE 802.16d	
Abstract	This contribution proposes a new PDU concatenation scheme for enhanced PDU separation in IEEE 802.16d/D3-2004.	
Purpose	Discuss and adopt enhanced feature of 802.16d/D3.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

# Proposal for a new PDU concatenation scheme to facilitate MAC PDU separation under error conditions

*Sunny Chang, Bonggee Song, Taein Hyon, Yunsang Park  
Samsung Electronics*


## 1. Problem Statement

802.16 MAC allows concatenations of several MAC PDUs having the same MCS level within a single burst. There is no limitation on the number of PDUs, and their sizes are also variable. Therefore, the receiver side does not know the burst information in advance such as the number of MAC PDUs and the size of each PDU.

The receiver separates the concatenated PDUs in the following sequence;

- 1) Read the first MAC header of the burst – the first 48 bits of the first MAC PDU
- 2) Check the validity of the MAC header using HCS. If an error occurs, the whole burst is discarded.
- 3) If the MAC header is valid, extract the size information of the PDU from the length field.
- 4) Read the first MAC PDU according to the size information and check the validity of the data. If the header is a bandwidth request header, this step is not necessary and will be skipped.
- 5) Read the next 48 bits. The receiver regards this as the next MAC PDU header.
- 6) Repeat Step 2) ~ Step 5) until all the MAC PDUs are read.

The following flow chart describes the sequence.

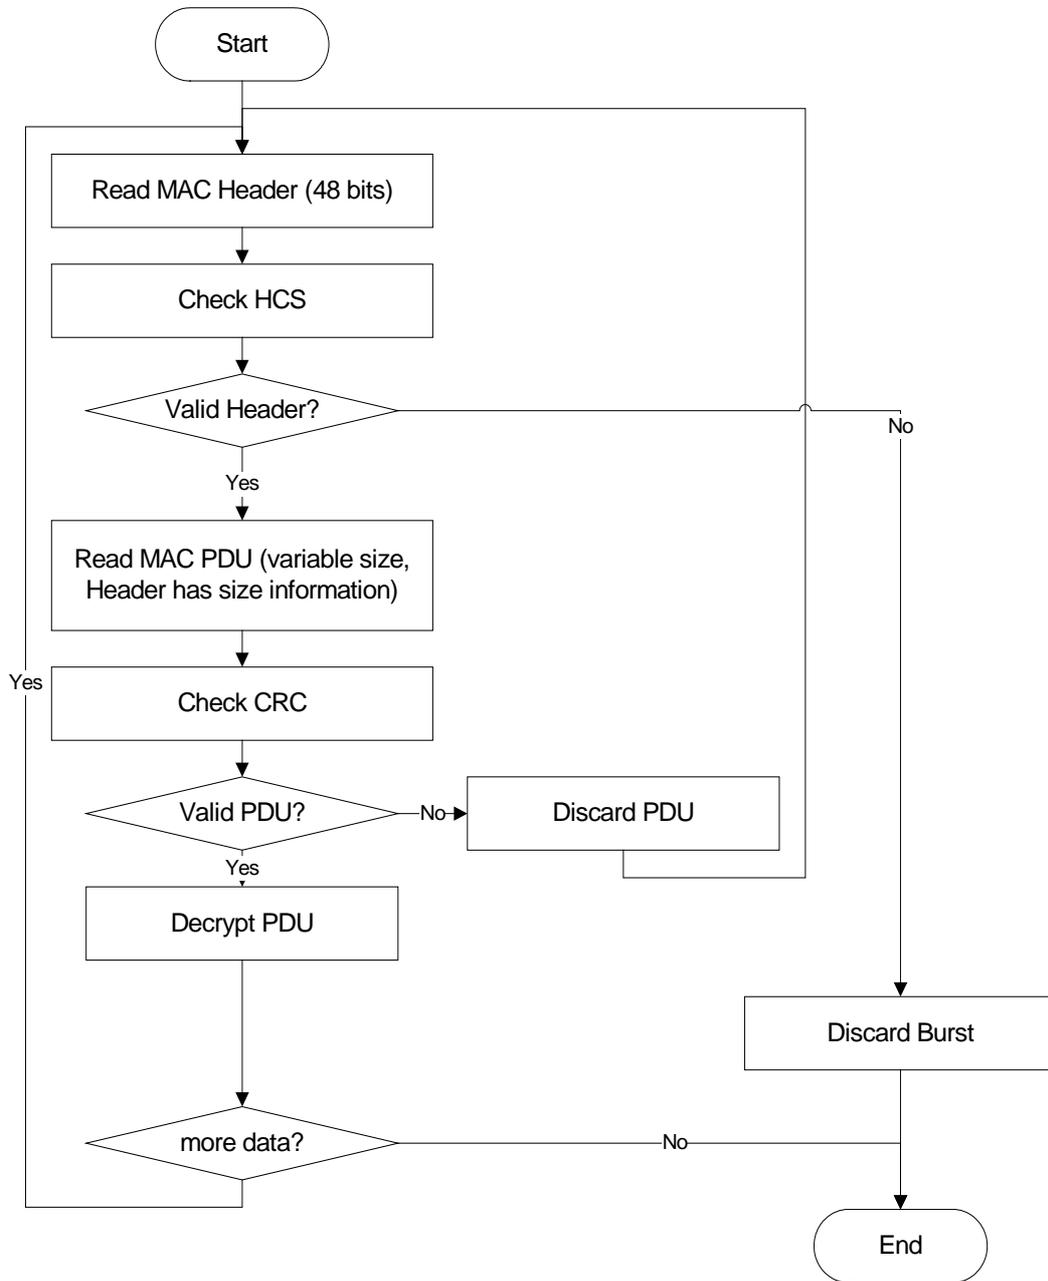

In this scheme, receivers must obtain the size information for the previous PDUs to correctly determine the starting point of the following MAC PDU. Therefore, if there is an HCS error in any of the previous MAC headers, the following PDUs cannot be separated and needs to be discarded.

This contribution proposes a new MAC PDU concatenation scheme that resolves unnecessary PDU destruction in case of MAC header error.


## 2. Proposed Remedy

Unlike the current PDU separation scheme, the new scheme discards only the erroneous PDUs and continues the PDU separation by finding the starting point of the next PDU header. To accomplish this, it is essential to have a more comprehensive MAC header search mechanism for an arbitrary number of concatenated MAC PDUs. This section shows an example where the following MAC header is found using HCS and CRC for the case where the previous MAC header was in error.

The receiver separates the concatenated PDUs in case of an error in any of the MAC headers in the following sequence;

- 1) If the MAC Header isn't valid, read the first 48bit data which has a possibility to be a MAC header and check its validity using HCS.
- 2) If the 48 bit data is deemed valid by passing the HCS check, then the size information of the PDU is extracted from the length field. Otherwise, go back to step 1)
- 3) Read the current MAC PDU according to the size information and check the validity of the data using CRC. If the header is a bandwidth request header, this step is not necessary and will be skipped.
- 4) Read the next 48 bit data and check the validity of the MAC header using HCS.
- 5) If either the current PDU in step 3) or the next MAC header in step 4) is valid, the MAC Header, which was found in step 2), is considered correct.
- 6) If neither of them is considered valid, repeat Step 1) ~ Step 5) until the next MAC header is found.


The following flow chart describes the sequence.

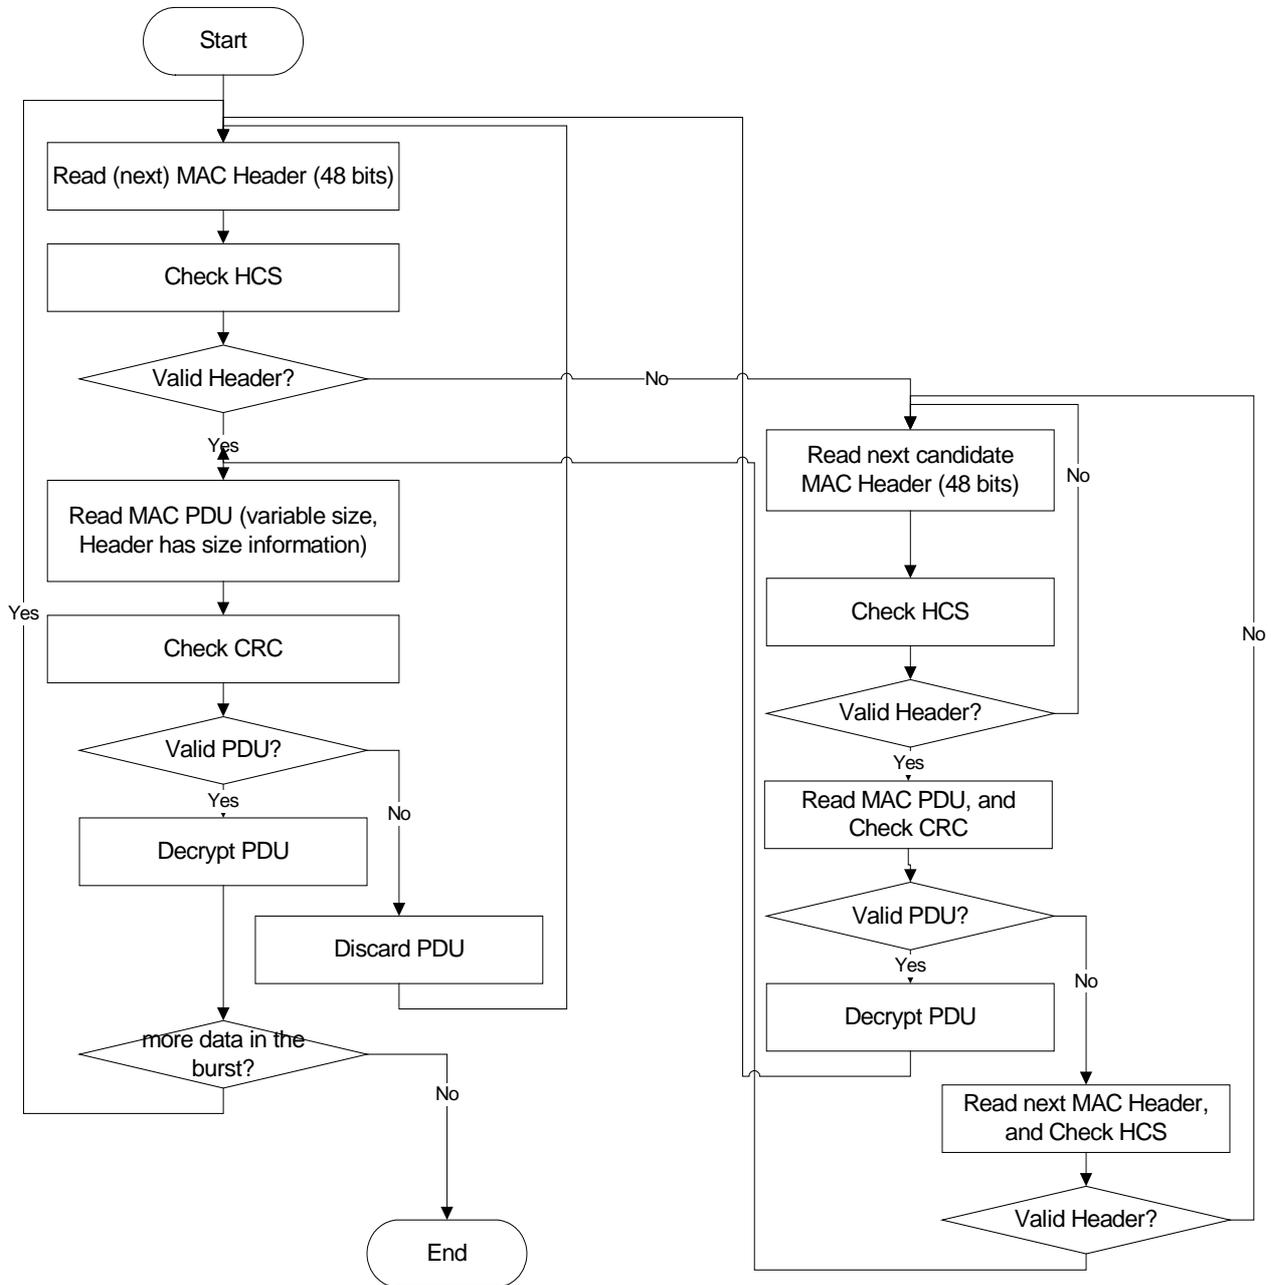

In the current concatenation scheme, because the size of the MAC PDU is arbitrary, the consecutive MAC PDUs can be located at any bit position in the burst. So when an error occurs in a MAC header, in order to find the next MAC header, the validity is checked by using HCS at all positions. This increases processing complexity.

To resolve the issue with minimal increase in processing complexity, we propose to restrict the MAC PDUs' starting point to a multiple of 48bits in a burst. For the case where the connection does not allow fragmentation or packing, the size of the PDUs' can't necessarily be a multiple of 48 bits. In this case, zeroes need to be padded between the end of the previous PDU and the start of the next PDU.

The following figure describes the new concatenation scheme.

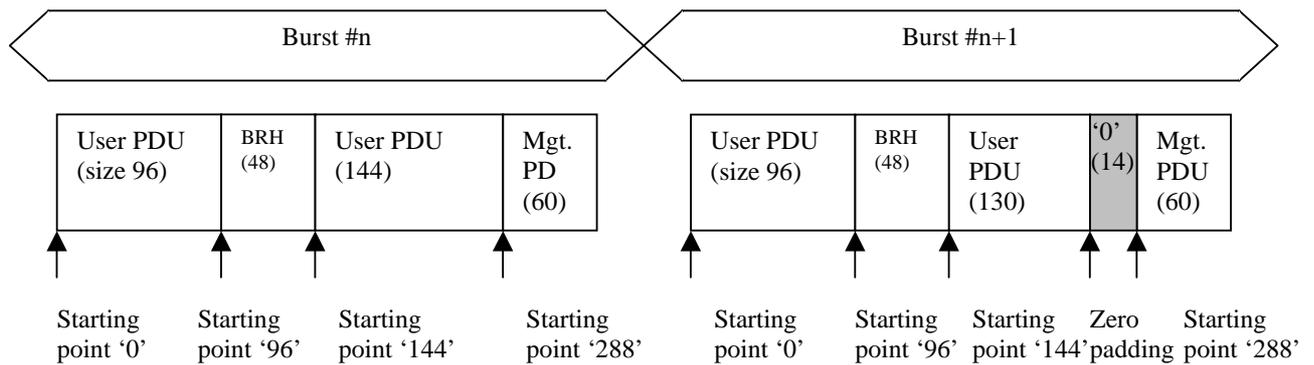

### 3. Proposed text changes

#### 6.4.3.2 Concatenation

Multiple MAC PDUs may be concatenated into a single transmission in either the uplink or downlink directions. When multiple MAC PDUs are concatenated into a single transmission, the starting position of each of the MAC PDUs have to be located at a multiple of 48bits position from the start of the burst. If necessary, zeros will be padded between the end of the previous PDU and the start of the next PDU. Figure 26 illustrates this concept for an uplink burst transmission. Since each MAC PDU

is identified by a unique CID, the receiving MAC entity is able to present the MAC SDU (after reassembling the MAC SDU from one or more received MAC PDUs) to the correct instance of the MAC SAP. MAC Management messages, user data, and bandwidth request MAC PDUs may be concatenated into the same transmission.

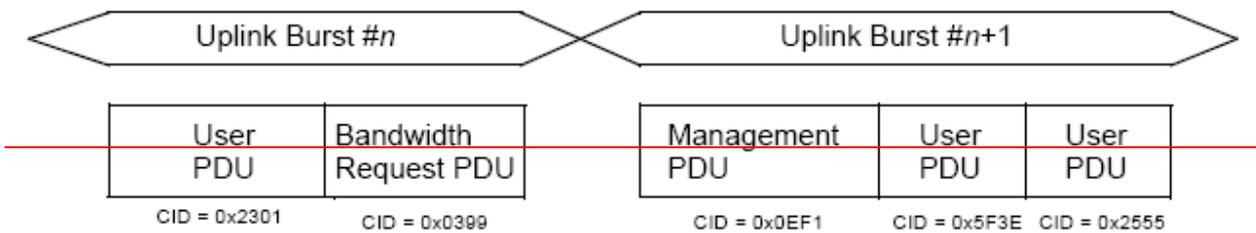


Figure 26—MAC PDU concatenation showing example CIDs

