

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Unique Randomizer Initialization for Interference Management in 802.16 OFDM PHY	
Date Submitted	2004-03-13	
Source(s)	Adam Kerr, Paul Petrus ArrayComm, 2480 North First St. San Jose, CA 95131-1014	Voice: 408-428-9080 Fax: 408-428-9083 E-mail:adam@, petrus@arraycomm.com
Re:	IEEE 802.16-REVd/D3-2004	
Abstract	Describes changes to initialization vector for randomizer in OFDM-256 PHY.	
Purpose	These changes will provide for improved detection of error at the PHY level in low reuse networks.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is SSbject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate text contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the reSSlting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives asSSrance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."</p> <p>Early disclOSSre to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:r.b.marks@ieee.org> as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>	

Unique Randomizer Initialization for Interference Management in 802.16d OFDM PHY

Adam Kerr and Paul Petrus

ArrayComm, Inc.

1. Introduction

While not mandated by the 802.16 standard, it is anticipated that any large-scale network rollout will include synchronization of all base stations to a common timing signal. In particular, it is highly recommended that TDD networks have a common downlink and uplink frame timing to reduce and control intracell interference. In such a deployment, downlink bursts will be transmit by different basestations with the same start time and duration, as will uplink bursts by different user terminals. In this configuration, there is significant likelihood that strongly interfering signals may be demodulated and mistaken for 'desired' signals.

In the event that either a base station or subscriber station mistakenly decode an overlapping burst from an out-of-cell transmission, there should be good support in the standard to provide for detection at the PHY/MAC level of this type of error. In the downlink direction, although the downlink MAP announces the BSID each frame, there is nothing to explicitly tie the subsequent burst transmissions to that particular BSID. In the uplink direction, there is no way to differentiate bursts transmit by a desired user terminal and interfering user terminals, and when an interfering burst is received with sufficient SINR it will supplant the burst from the desired user terminal. Furthermore, an AAS basestation is capable of resolving multiple simultaneous uplink user signals based on spatial characteristics; once this is done, however, there needs to be a way to associate each of these signals with the correct user. To support this functionality unique training between users (as in [1]) has already been recommended, and we further recommend a connection-based error detection scheme, also at the PHY/MAC level.

The most common means of avoiding these problems is to arrange for an incorrectly identified burst to fail the CRC checksum test. This may be realized by making the randomization process of the 802.16d OFDM PHY [2] dependent on parameters unique to the base station and the specific connection to the subscriber station. In this case a mistaken reception of a burst from an unintended party (base station or subscriber station) will not be successfully unrandomized, and a detectable CRC error will result.

2. Conceptual Description of Standards Modification

The current randomization (scrambling) process for the 802.16 OFDM PHY is performed by a modulo-2 addition to each uplink or downlink data burst with a pseudo-random binary sequence output from a linear feedback shift register as described in 8.3.3.1 of [2].

The shift register is 15 bits long, with a seed value that is initialized at the beginning of each frame on the downlink, and again at the beginning of each downlink burst (not including burst #1). On uplink, the randomizer seed is initialized at the beginning of each burst. Preambles are not scrambled.


In order to create a randomization that is dependent on both base station and the connection, we introduce modifications to this seed value. For the preambles and broadcast portion of the downlink frame (FCH and burst #1) we recommend maintaining the fixed constant seed value as currently defined. For all other downlink bursts and all uplink bursts, we recommend that a combination of base station ID, DIUC/UIUC and frame number form the seed value for the shift register, rather than the current combination of DIUC/UIUC and symbol number.

The base station ID is a 48-bit value with the upper 24 bits being the operator ID, and the lower 24 bits used to identify the base station, while the frame number is 24 bits long. We recommend that the new randomizer seed values be formed from the lowest 4 bits of the base station ID, 4 bits of DIUC/UIUC and the lowest 4 bits of frame number.


3. Proposed Text

The following changes to section 8.3.3.1 will incorporate these ideas:

- 1) The paragraph immediately above Figure 192 is changed to read:
 “On the downlink, the randomizer shall be re-initialized at the start of each frame with the vector: 1 0 0 1 0 1 0 1 0 0 0 0 0 0. The randomizer shall not be reset at the start of burst #1. At the start of subsequent bursts, the vector shown in Figure 192 shall be used to initialize the randomizer.”
- 2) The paragraph immediately above Figure 193 is changed to read:
 “On the uplink, the randomizer is initialized with the vector shown in Figure 193.”
- 3) Figure 192 is replaced with:

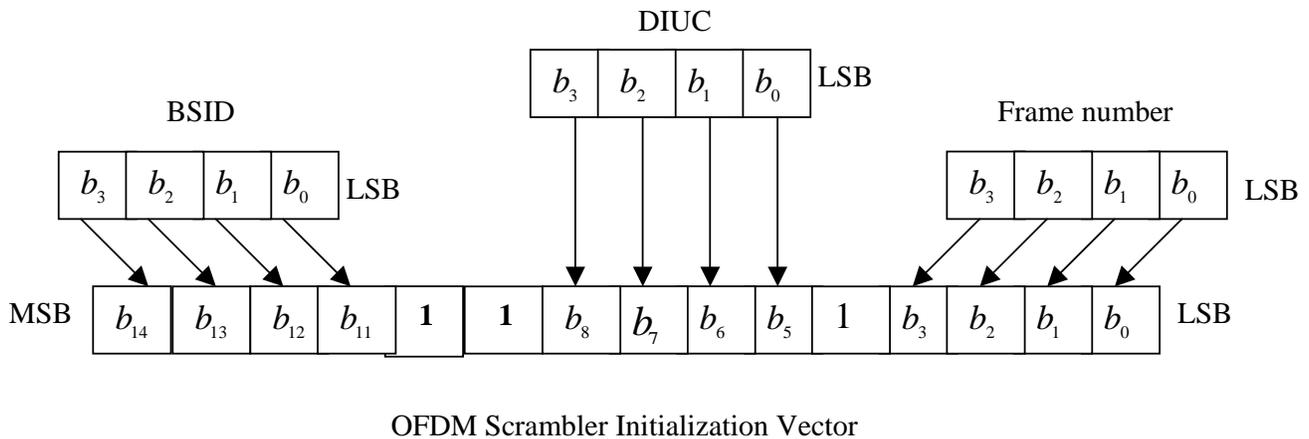

4) Figure 193 is replaced with:

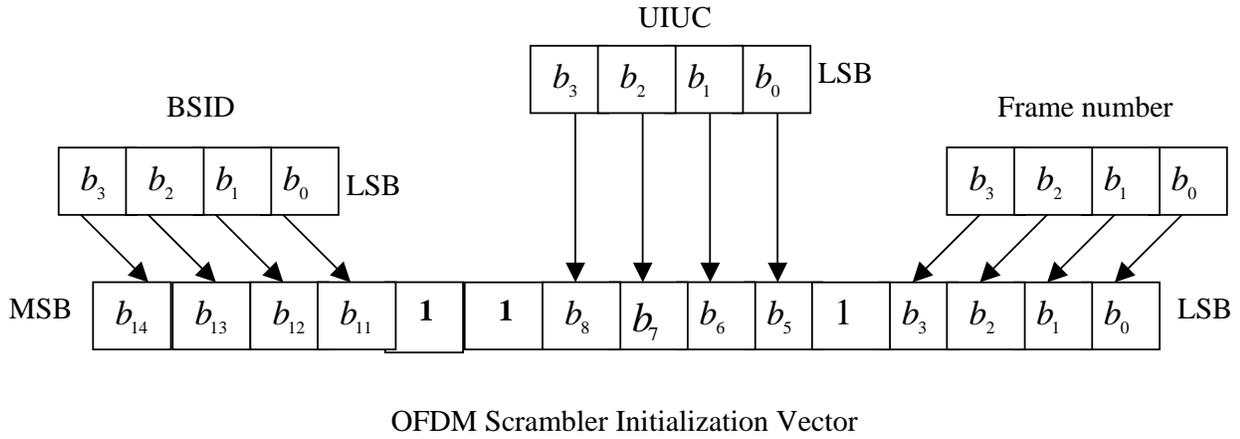

4. References

- [1] IEEE C802.16d-03/62r1 Training for AAS, Naftali Chayat, Tal Kaitz and John Liebetreu
- [2] IEEE P802.16-REVd/D3-2004 Draft IEEE Standard for local and metropolitan area networks Part 16: Air Interface for Fixed Broadband Wireless Access Systems