

Working Towards an ERL Baseline

Richard Mellitz

Samtec

May 2019

IEEE 802.3 100 Gb/s, 200 Gb/s, and 400 Gb/s Electrical Interfaces Task Force, Salt Lake City, Utah

Table of Contents

- ❑ ERL β_x parameter determination from package parameters
- ❑ ERL ρ_x parameter determination
- ❑ Change ERL computation?
- ❑ ERL parameter base on IEEE802.3cd and new .3ck contributions
 - ERL parameters KR
 - ERL parameters CR
 - ERL parameters AUI C2M
 - ERL parameters AUI C2C
- ❑ Actions

The β_x Parameter for ERL is Derived from Package Loss and Reference Channel Loss

12 mm
package

32 mm
package


32 mm
package

The ERL β_x parameter is computed from difference in package delay, package loss, and maximum channel loss with packages.

28 dB


32 mm
package

Fitted Loss* Difference Between 12 mm and 30 mm Package is 2.29 dB

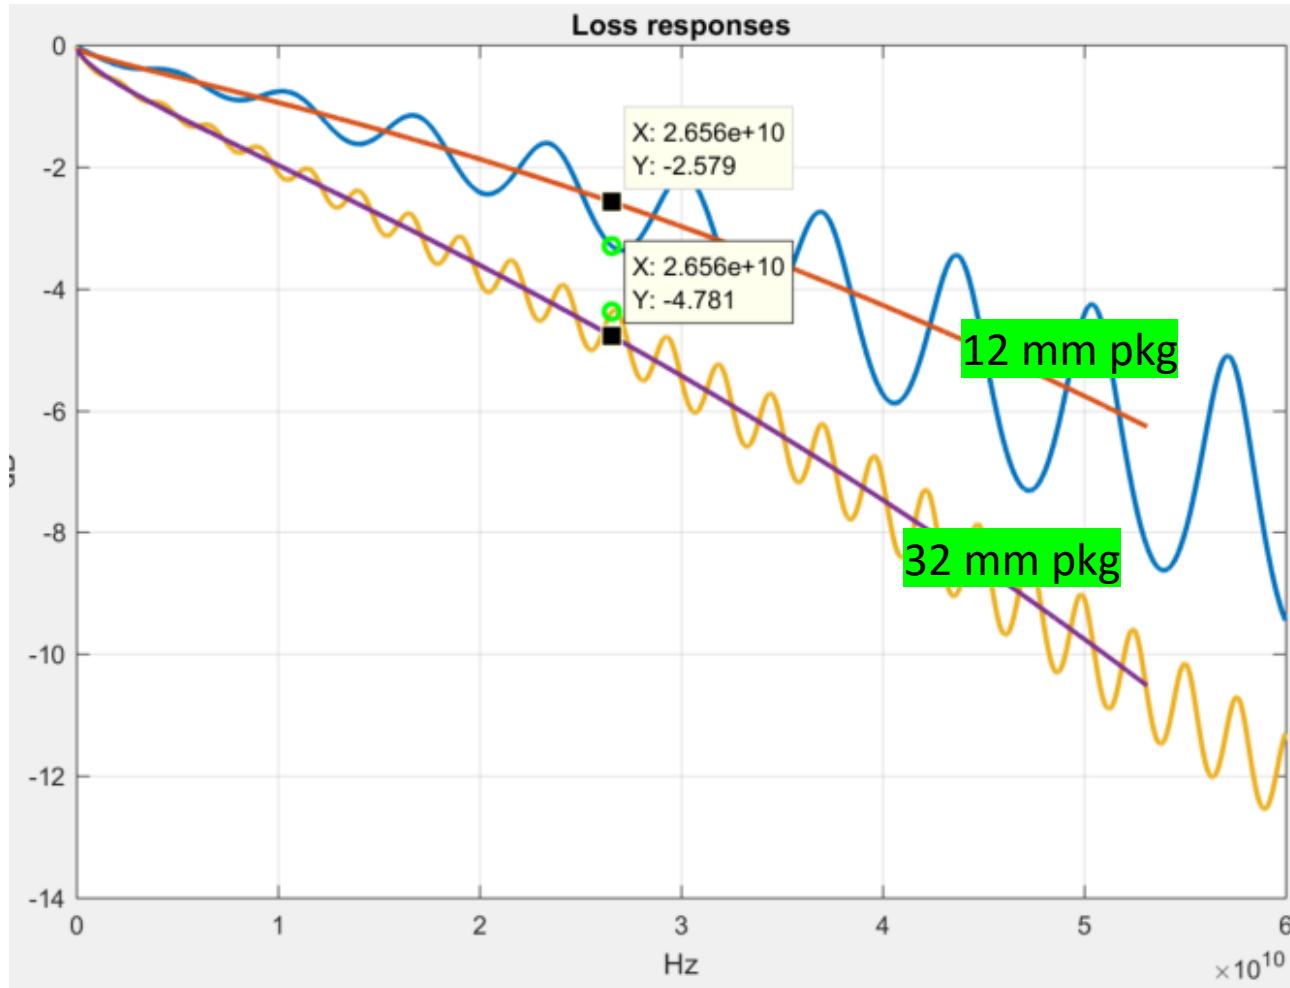

* C_d included

Time Delay Difference Estimate Between 12 mm and 32 mm Package is 121.8 ps

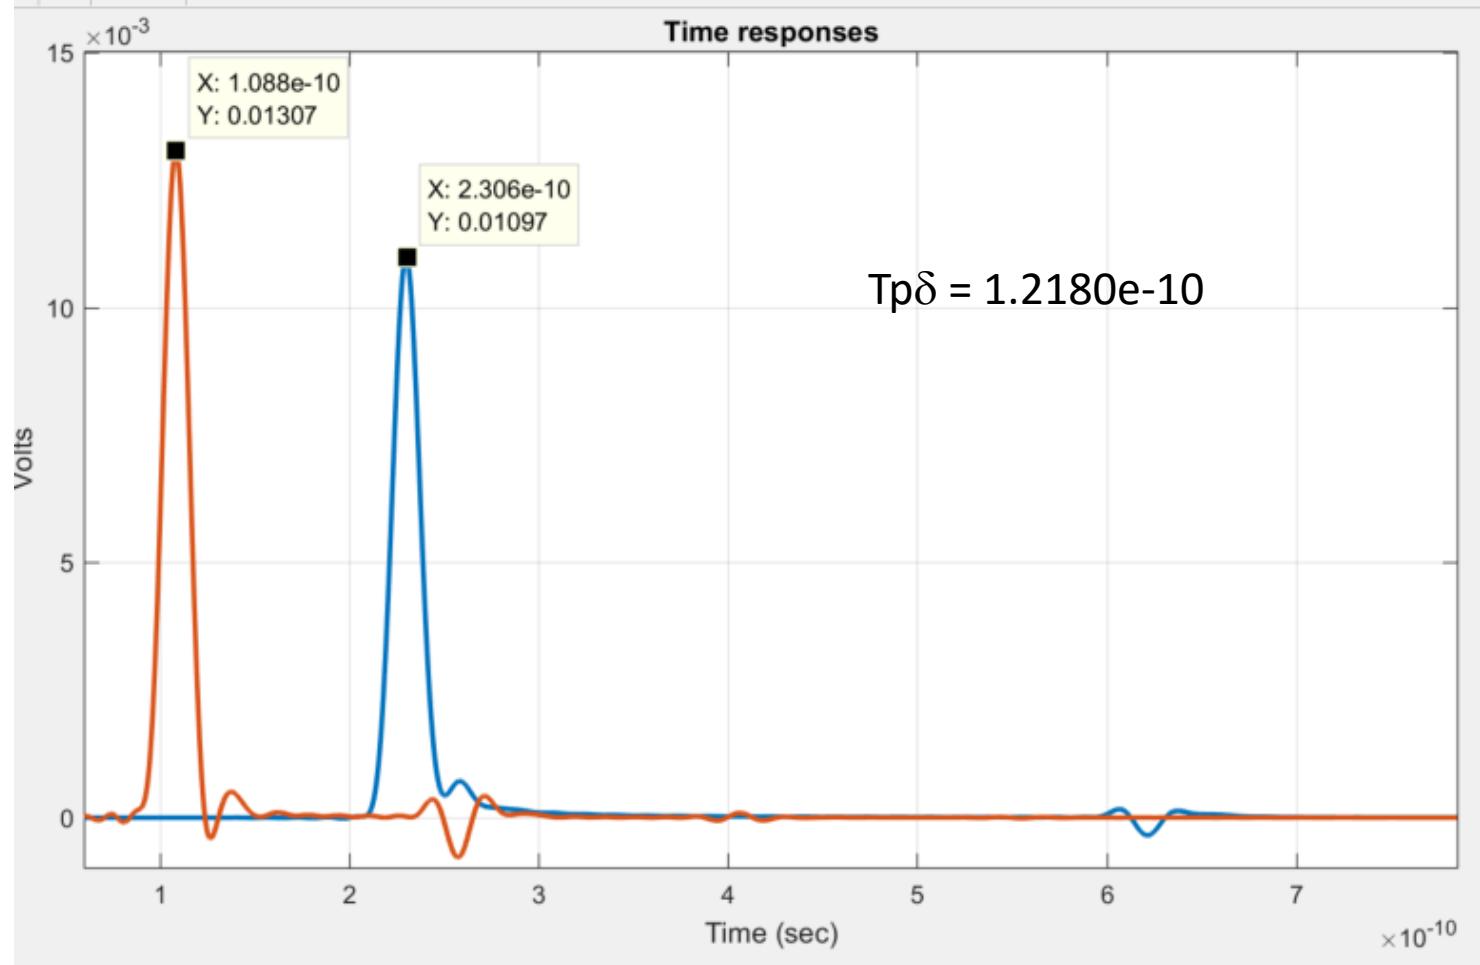

Total Ref Loss for a 28 dB Channel (@ 26.36 GHz)

- ❑ 32 mm fitted package loss = 4.781 dB
- ❑ 2 x package loss + 28 dB = 38.56 dB
- ❑ For β_x computation, $IL_{ref} = 38.562 \text{ dB}$

Determine β_x

- ❑ $Tp\delta$ is the timing difference between pulse responses
 - $Tp\delta = 1.2180e-10$ for .3ck
- ❑ ΔIL is the loss difference at the Nyquist frequency
 - $\Delta IL = 2.125$ dB for .3ck
- ❑ Define IL_{ref} as a required insertion loss
 - $IL_{ref} = 38.562$ dB for .3ck
- ❑ Define the loss weight, β_x , as:

$$\bullet \beta_x = \frac{10^{\frac{-(IL_{ref}-\Delta IL)}{20}} - 10^{\frac{-(IL_{ref})}{20}}}{TP\delta 10^{\frac{-(IL_{ref})}{20}}}$$

$$\bullet \beta_x = 2.2756 \text{ GHz}$$

Recap of ρ_x for ERL Computation

- The parameter, ρ_x , uses the ERL of the
 - at the test point where ERL is computed
 - other side
- $\rho_x = 10^{\frac{-ERL}{20}}$
- This caps the re-re-reflection at the test point from the DFE range

“mellitz_3ck_adhoc_01_032719” Proposed a Change to ERL Computation

Changes to Annex 93A
... a simplification

Change 93A-61 to

$$TG_{rr}(t) = \begin{cases} 0, & t < T_{fx} \\ \rho_x G_x, & T_{fx} \leq t < T_{fx} + \frac{N_{bx}+1}{f_b} \\ 1, & t \geq T_{fx} + \frac{N_{bx}+1}{f_b} \end{cases} \leftarrow G_{rr}(t) = \begin{cases} 0 & t < T_{fx} \\ \rho_x(1 + \rho_x) \exp\left(\frac{[(t - T_{fx})f_b - (N_{bx} + 1)]^2}{(N_{bx} + 1)^2}\right) & T_{fx} \leq t < T_{fx} + \frac{N_{bx} + 1}{f_b} \\ 1 & t \geq T_{fx} + \frac{N_{bx} + 1}{f_b} \end{cases} \quad \text{Annex 93A} \quad (93A-61)$$

Where

G_x = is defined in the calling clause
Normally set $G_x = 1$ in .3ck

If not set in the calling clause G_x is defined as such

$$G_x = (1 + \rho_x) e^{-\frac{\left(\frac{t-T_{fx}}{T_b}-(N_b+1)\right)^2}{(N_b+1)^2}}$$

i.e the case for .3cd

IEEE 802.3 100 Gb/s, 200 Gb/s, and 400 Gb/s Electrical Interfaces Task Force

8

- The idea was to make it easier to explain.
- However, since there is little difference in the ERL results the recommendation is not to change at this point in time

ERL Parameters for KR

KR Tx and Rx device

- $\rho_x = 0.32$
- $\beta_x = 2.2756 \text{ GHz}$
- $T_r = 10 \text{ ps}$
- $N = 200$
- $N_{bx} = N_b$
- $ERL_{min} = 12 \text{ dB}$

- Includes the impact for a worst case fixture

KR channel

- $\rho_x = 0.25$
- $\beta_x = 2.2756 \text{ GHz}$
- $T_r = 10 \text{ ps}$
- $N = 3000$
- $N_{bx} = N_b$
- $ERL_{min} = 10 \text{ dB}$

ERL Parameters for CR


CR host

- $\rho_x = 0.32$
- $\beta_x = 2.2756 \text{ GHz}$
- $T_r = 10 \text{ ps}$
- $N = 600$
- $N_{bx} = N_b$
- $ERL_{min} = 10 \text{ dB}$

Cable assembly

- $\rho_x = 0.32$
- $\beta_x = 2.2756 \text{ GHz}$
- $T_r = 10 \text{ ps}$
- $N = 2000$
- $N_{bx} = N_b$
- $ERL_{min} = 10 \text{ dB}$

"mellitz_3ck_adhoc_01a_042419" Suggests Host to Module Output ERL Limits Based on Channel Acceptance and VEO

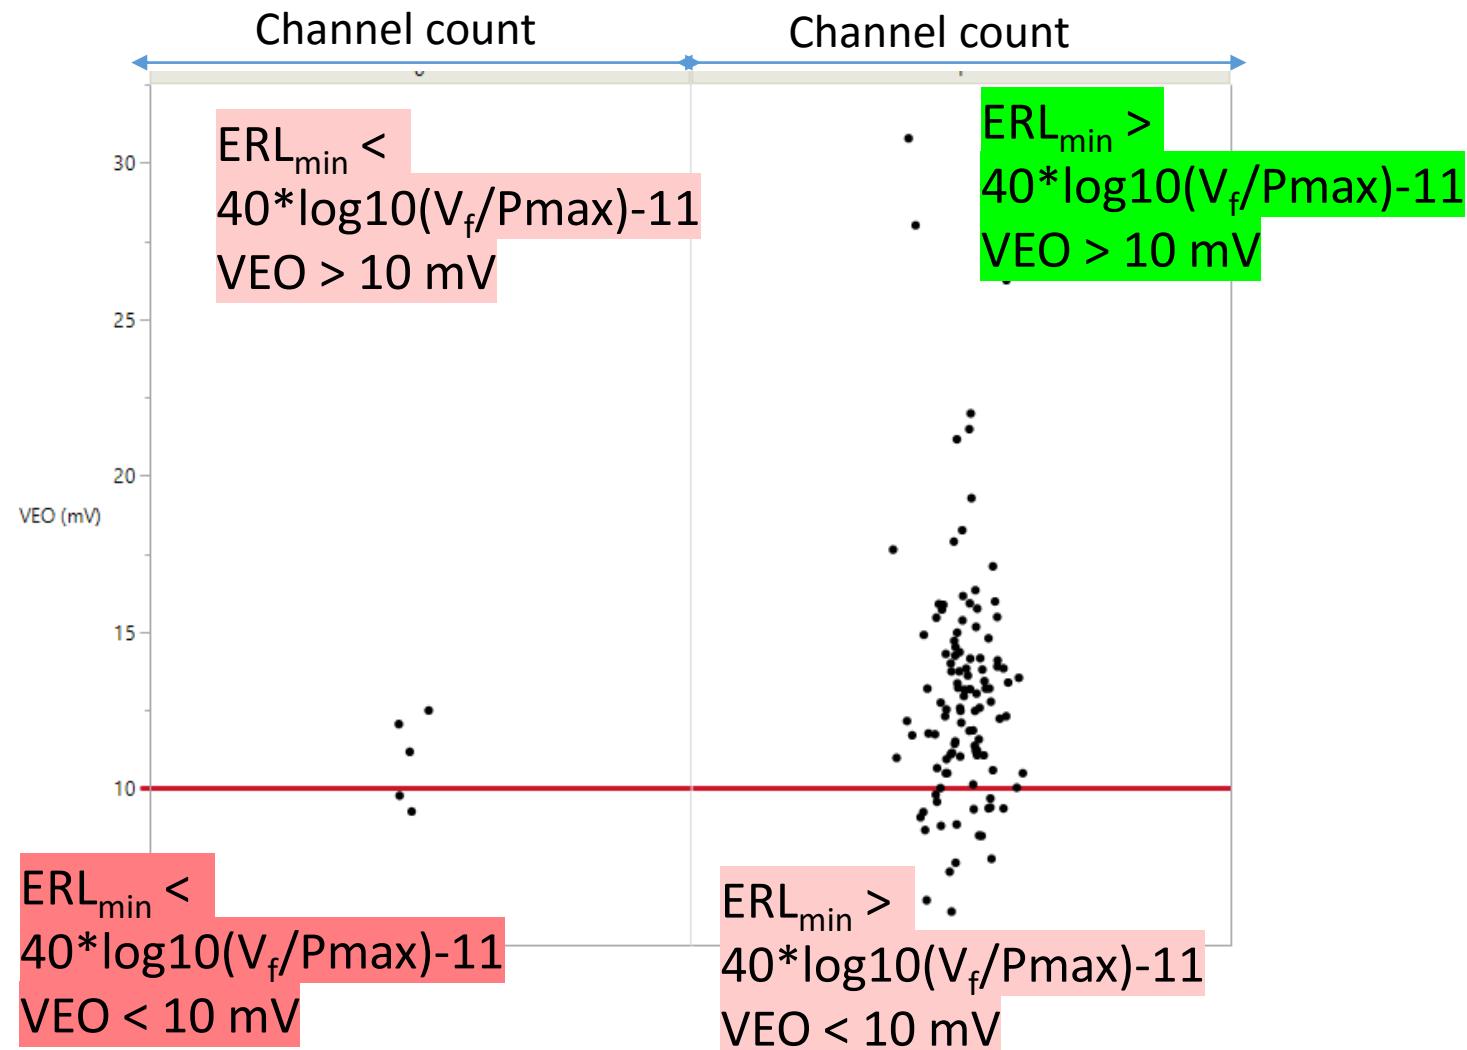

ERL Parameters for AUI C2M

AUI Host Output	AUI Host Input	AUI module
<input type="checkbox"/> $\rho_x = 0.25$	<input type="checkbox"/> $\rho_x = 0.25$	<input type="checkbox"/> $\rho_x = 0.32$
<input type="checkbox"/> $\beta_x = 2.2756 \text{ GHz}$	<input type="checkbox"/> $\beta_x = 2.2756 \text{ GHz}$	<input type="checkbox"/> $\beta_x = 2.2756 \text{ GHz}$
<input type="checkbox"/> $T_r = 10 \text{ ps}$	<input type="checkbox"/> $T_r = 10 \text{ ps}$	<input type="checkbox"/> $T_r = 10 \text{ ps}$
<input type="checkbox"/> $N = 800$	<input type="checkbox"/> $N = 800$	<input type="checkbox"/> $N = 200$
<input type="checkbox"/> $N_{bx} = 4$	<input type="checkbox"/> $N_{bx} = 4$	<input type="checkbox"/> $N_{bx} = 4$
<input type="checkbox"/> $ERL_{min} = 40 * \log_{10}(V_f/P_{max}) - 11$ <ul style="list-style-type: none">• For fitting with $N_p = 200$	<input type="checkbox"/> $ERL_{min} = 10 \text{ dB}$	<input type="checkbox"/> $ERL_{min} = 12 \text{ dB}$ <ul style="list-style-type: none">• Should the fixture delay be on the module side if the connector?

ERL Parameters for AUI C2C

AUI C2M Tx/Rx Device

- $\rho_x = 0.32$
- $\beta_x = 2.2756 \text{ GHz}$
- $T_r = 10 \text{ ps}$
- $N = 200$
- $N_{bx} = N_b$
- $ERL_{min} = 12 \text{ dB}$
 - Includes the impact for a worst case fixture

AUI C2M Channel

- $\rho_x = 0.25$
- $\beta_x = 2.2756 \text{ GHz}$
- $T_r = 10 \text{ ps}$
- $N = 2000$
- $N_{bx} = N_b$
- $ERL_{min} = 12 \text{ dB}$

Action

- Uses this document as a baseline for ERL
- IEEE802.3ck participants to verify these make sense for their affiliates
 - Most any COM version 2.52 and higher may be used to compute ERL.
 - For C2M hosts, use COM versions later than 2.60
 - The package is included in the ERL computation.

Thank You!