

# IEEE P802.21/D00.05

## Draft IEEE Standard for Local and Metropolitan Area Networks: Media Independent Handover Services

Sponsor

**LAN MAN Standards Committee  
of the  
IEEE Computer Society**

**Abstract:** This standard specifies 802 media access-independent mechanisms that optimize handovers between heterogeneous 802 systems and between 802 systems and cellular systems..

**Keywords:** media independent handover

---

Copyright © 2005 by the Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA  
All rights reserved.

All rights reserved. This document is an unapproved draft of a proposed IEEE Standard. As such, this document is subject to change. **USE AT YOUR OWN RISK!** Because this is an unapproved draft, this document must not be utilized for any conformance/compliance purposes. Permission is hereby granted for IEEE Standards Committee participants to reproduce this document for purposes of IEEE standardization activities only. Prior to submitting this document to another standards development organization for standardization activities, permission must first be obtained from the Manager, Standards Licensing and Contracts, IEEE Standards Activities Department. Other entities seeking permission to reproduce this document, in whole or in part, must obtain permission from the Manager, Standards Licensing and Contracts, IEEE Standards Activities Department.

IEEE Standards Department  
Copyright and Permissions  
445 Hoes Lane, P.O. Box 1331  
Piscataway, NJ 08855-1331, USA

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

This page intentionally left blank

## Introduction

The IEEE 802.21 standard defines extensible media access independent mechanisms that enable the optimization of handovers between heterogeneous 802 systems and may facilitate handovers between 802 systems and cellular systems.

## Working Group Officers

At the time this supplement to the standard was submitted to Sponsor Ballot, the working group had the following officers.

**Ajay Rajkumar**, *Chair*

**Michael Williams**, *Vice Chair*

**Xiaoyu Liu**, *Secretary*

**Vivek Gupta**, *Technical Editor*

Proposals for Media Independent Handover solutions were made by the following individuals (co-authors of the accepted proposal are marked with an asterisk)

Farooq Anjum*	Wolfgang Groeting*	Hong-Yon Lach*
Stefan Berg*	Vivek Gupta*	Peter Larsson*
Yogesh Bhatt*	Youn-Hee Han*	Jin Lee*
Alistair Buttar*	Fang Hao*	Sungjin Lee*
Alan Carlton*	Eleanor Hepworth*	Michael Lee*
Subir Das*	Michael HogHooghi*	Xiaoyu Liu*
Ashutosh Dutta*	Cheng Hong*	Guang Lu*
Les Eastwood*	Prakash Iyer*	Sunil Madhani*
Natraj Ekambaram*	David Johnston*	Mani Mahalingam*
Stefano Faccin*	Maged Kaki*	Stephen McCann*
Victor Fajardo*	Ronny Kim*	Ray Miller*
Peretz Feder*	Benjamin Koh*	Padraig Moran*
Andrea Francini*	Kalyan Koora*	Nat Natarajan*
Yuri Goldstein*	Yongwon Kwak*	Eric Njedjou*
Prasad Govindarajan*	Jeff Keating*	Yoshiro Ohba*
Ulises Olvera-Hernandez*	Raziq Yaqub*	
Chihyun Park*	Tao Zhang*	
SooHong Daniel Park*	Yao Zhonghui*	
Mathieu Peresse*	Juan Carlos Zuniga*	
Daniel Orozco-Perez*		
Ajay Rajkumar*		
Sampath Rangarajan*		
Marian Rudolf*		
Reijo Salminen*		
Sameer Sharma*		
Ajoy Singh*		
Kenichi Taniuchi*		
Yousif Targali*		
Michael Williams*		
Qiaobing Xie*		

Others who made presentations to the Media Independent Handover Working Group, and contributions to this

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

document, were:

Sanjeev Athayle  
Junghoon Jee  
Eunah Kim  
Masahiro Kuroda  
Takashi Sakakura  
Srinivas Sreemanthula  
Jesse Walker

[NOTE - Please send other names to the Editor. Need to update list and re-balance when list is done]

The following members of the balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

To be supplied by IEEE

## Editor's Foreword

### [Notes]

[Throughout this document all notes such as this one are temporary notes inserted by the Editors for a variety of purposes; these notes and the Editor's Forward will all be removed prior to publication and are not part of the normative text.]

### [Comments and participation in 802.21 standards development]

Comments on this draft are encouraged. **PLEASE NOTE: All issues related to IEEE standards presentation style, formatting, spelling, etc. are routinely handled between the 802.21 Editor and the IEEE Staff Editors prior to publication, after balloting and the process of achieving agreement on the technical content of the standrad is complete.** Readers are urged to devote their valuable time and energy only to comments that materially affect either the technical content of the document or the clarity of that technical content. Comments should not simply state what is wrong, but also what might be done to fix the problem.

Full participation in the deveopment of this draft requires individual attendance at IEEE 802.21 meetings. Information on 802.21 activities, working documents and email distribution lists etc.can be found on the 802.21 website:

<http://ieee802.org/21>

Comments on this document may be sent to the 802.21 mailing reflector, to the Editor, or to the Chairs of the 802.21 Working Group.

Vivek Gupta

Editor, P802.21 (Media Independent Handover)

Email: [vivek.g.gupta@intel.com](mailto:vivek.g.gupta@intel.com)

Ajay Rajkumar

Chair, P802.21 (Media Independent Handover)

Email: [ajayrajkumar@lucent.com](mailto:ajayrajkumar@lucent.com)

Michael Williams

Vice Chair, P802.21 (Media Independent Handover)

Email: [michael.g.williams@nokia.com](mailto:michael.g.williams@nokia.com)

**PLEASE NOTE: Comments whose distribution is restricted in any way cannot be considered and may not be acknowledged.]**

**[The draft text and accompanying information**

This document currently comprises:

- A temporary cover page, preceding the Editor’s Forewords. This cover page will be removed following working group approval of this draft, i.e. prior to sponsor ballot.
- IEEE boilerplate text.
- The Editor’s foreword, including this text.
- A title page for the propose standard including an Abstract and Keywords. This title page will be retained following approval.
- A record of participants
- An Annex Z comprising the editor’s discussion of issues. This annex will be deleted from the document prior to sponsor ballot.

**History and Scope**

A PAR (Project Authorization request) for this project was drafted at the November 2003 meeting, forwarded for SEC consideration by vote of the 802.21 ECSG during the January 2004 meeting of P802 and approved by the IEEE-SA Standards Board with the following Scope and Purpose:

**Scope of the Proposed Project:**

This standard defines extensible 802 media access independent mechanisms that enable the optimization of handover between heterogeneous 802 systems and may facilitate handover between 802 systems and cellular systems.

**Purpose of the Proposed Project:**

The purpose is to improve the user experience of the mobile devices by facilitating handover between 802 networks whether or not they are of different media types, including both wired and wireless, where handover is not otherwise defined and to make it possible for mobile devices to perform seamless handover where the network environment supports it. These mechanisms may also be useable for handovers between 802 networks and non 802 networks.

**The joint harmonized contribution was confirmed during the May 2005 meeting and the first WG draft was produced in the July 2005 meeting.]**

1	1. Overview.....	1
2		
3		
4	1.1 Scope.....	1
5	1.2 Purpose.....	1
6	1.3 Assumptions.....	3
7	1.4 Media Independence.....	4
8	1.5 Media Dependence.....	4
9	1.6 Inter-operability and Compliance.....	4
10		
11	2. References.....	5
12		
13	3. Definitions.....	7
14		
15	4. Abbreviations and acronyms.....	10
16		
17	5. General Architecture.....	12
18		
19	5.1 Introduction.....	12
20	5.2 General Design Principles.....	14
21	5.3 Media Independent Handover Reference Framework.....	14
22	5.4 MIH Function Services.....	18
23	5.5 MIH Reference Model for Access Networks.....	21
24	5.6 Service Access Points (SAPs).....	28
25	5.7 Media Independence.....	30
26	5.8 Media Dependence.....	30
27		
28	6. MIH Function Services.....	32
29		
30	6.1 Media Independent Event Service.....	32
31	6.2 Media Independent Command Service.....	38
32	6.3 Media Independent Information Service.....	42
33		
34	7. Service Access Points (SAPs) and Primitives.....	62
35		
36	7.1 Introduction.....	62
37	7.2 SAPs.....	62
38	7.3 Link Layer Primitives.....	66
39	7.4 MIH Primitives.....	81
40		
41	8. Media Independent Handover Protocol.....	108
42		
43	8.1 Introduction.....	108
44	8.2 MIH Protocol Transport.....	108
45	8.3 Description.....	109
46	8.4 MIH Protocol Messages.....	113
47	8.5 Protocol Flow.....	126
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

ANNEX ..... 128

Annex A-1..... 128

Annex A-2..... 130

Annex A-3..... 134

Annex A-4..... 135

Annex B ..... 136

Annex C ..... 144

Annex D..... 158

## List of Figures

1		
2		
3		
4	Figure 1: MIH Function Location and Key Services .....	3
5	Figure 2: MIH Communication Model .....	15
6	Figure 3: Logical Network Reference Model .....	18
7	Figure 4: General MIH Reference Model and SAPs .....	22
8	Figure 5: MIH Reference Model across Different Networks .....	23
9	Figure 6: MIH Reference Model for 802.3 .....	24
10	Figure 7: MIH Reference Model for 802.11 .....	25
11	Figure 8: MIH Reference Model for 802.16 .....	26
12	Figure 9: MIH Reference Model for 3GPP enabled Mobile Stations .....	26
13	Figure 10: MIH Reference Model for 3GPP2 enabled Mobile Stations .....	27
14	Figure 11: MIH Reference Model for Mobile Stations with Multiple Protocol Stacks .....	28
15	Figure 12: Relationship between different MIH SAPs .....	29
16	Figure 13: Link Events and MIH Events .....	33
17	Figure 14: Remote MIH Events .....	34
18	Figure 15: MIH Events Registration and Flow .....	35
19	Figure 16: MIH Events Flow Model .....	35
20	Figure 17: Local MIH Commands .....	39
21	Figure 18: Remote MIH Command .....	39
22	Figure 19: Local Command Service Flow .....	40
23	Figure 20: Remote Command Service Flow .....	40
24	Figure 21: Horizontal and Vertical Handovers .....	42
25	Figure 22: TLV Representation of Information Elements .....	48
26	Figure 23: A Graphical Representation of basic schema .....	60
27	Figure 24: L2-based MIIS information flow .....	61
28	Figure 25: L3-based MIIS information flow .....	61
29	Figure 26: Common MIH Frame Format .....	109
30	Figure 27: Interaction for MIHF- MIHF message exchange .....	110
31	Figure 28: MIHF Header Format .....	110
32	Figure 29: MIHF Header TLV Format .....	111
33	Figure 30: MIHF Frame .....	112
34	Figure 31: MIHF Frame Format .....	112
35	Figure 32: On demand MIH capability discovery procedure .....	127
36	Figure 33: Handover from 802.11 to 3GPP2 .....	128
37	Figure 34: An Example Representation of Media Independent Neighbor Graph .....	136
38	Figure 35: Partial Set of MING .....	137
39	Figure 36: MING POA Report .....	138
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

## List Of Tables

1		
2		
3		
4		
5		
6	Table-1: Summary of Communication Reference Points .....	16
7	Table-2: Link Events .....	36
8	Table-3: MIH Events .....	37
9	Table-4: MIH Commands .....	41
10	Table-5: Link Commands .....	41
11	Table-6: Information Elements .....	44
12	Table-7: Information Elements Name Space .....	47
13	Table-8: Operator Identifier Encoding .....	49
14	Table-9: Value field format of PoA Location TLV .....	51
15	Table-10: Value field format of PoA Location Information (Civic Address) .....	52
16	Table-11: Value field format of PoA Location Information (Geospatial location) .....	52
17	Table-12: Value field format of PoA Subnet Information TLV .....	53
18	Table-13: C_SAP Primitives .....	63
19	Table-14: MIH_SAP Primitives .....	64
20	Table-15: MIH_LINK_SAP Primitives .....	65
21	Table-16: MIH_NMS_SAP Primitives .....	66
22	Table-17: Transport Options for MIH Protocol .....	108
23	Table-18: MIHF Fixed Header description .....	111
24	Table-19: MIH Function Messages .....	112
25	Table-20: MIH-3GLINK_SAP Primitives .....	130
26	Table-21: Mapping MIH Primitives to Reference Points .....	134
27	Table-22: Type identifiers for Information Elements .....	135
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		

# IEEE P802.21/D00.05

## Draft IEEE Standard for Local and Metropolitan Area Networks: Media Independent Handover Services

### 1. Overview

#### 1.1 Scope

The scope of the IEEE 802.21 (Media Independent Handover) standard is to develop a specification that provides link layer intelligence and other related network information to upper layers to optimize handovers between heterogeneous media. This includes links specified by 3GPP, 3GPP2 and both wired and wireless media in the IEEE 802 family of specifications.

#### 1.2 Purpose


The purpose of the IEEE 802.21 standard is to enhance user experience of mobile devices by supporting handovers between heterogeneous networks.

This document describes a standard to satisfy the requirements for media independent handover as outlined in [1]. The standard addresses the support of handovers for both mobile and stationary users. For mobile users, handovers may occur due to a changes in wireless link conditions. Alternatively, handovers may occur due to gaps in radio coverage that result from terminal movement. For the stationary user, handovers may become imminent when the surrounding environment changes, making one network more attractive than another. Another possibility is that the user may choose an application which requires a handover to a higher data rate channel, for example during download of a large data file. In all cases service continuity should be maximized during the handover. As an example when making a network transition during a phone call the handover procedure should be executed during a pause in the conversation so as to minimize any perceptible interruption in service.

The IEEE 802.21 standard supports cooperative use of both mobile terminals and network infrastructure. The mobile terminal is well-placed to detect available networks. The network infrastructure is well-suited to store overall network information, such as neighborhood cell lists, location of mobile devices, higher layer services available and thus help in optimum network selection. Both the mobile terminal and the network can make decisions about connectivity. In general, both the terminals and the network points of attachment such as base stations and access points can be multi-modal, i.e. capable of supporting multiple radio standards and simultaneously transmitting on more than one interface.

1 The overall network can include both micro cells (for IEEE 802.11 or IEEE 802.15 coverage) and macro  
2 cells (for 3GPP, 3GPP2, or IEEE 802.16 coverage) which will in general intersect. The handover process is  
3 typically conditioned by measurements and triggers supplied by the link layers on the terminal. The mea-  
4 surements may report signal quality, synchronization time differences, transmission error rates, etc. and are  
5 some of the metrics used in handover algorithms. Specifically the standard consists of the following ele-  
6 ments:  
7

- 8
- 9
- 10 a) A framework that enables transparent service continuity while a mobile node (MN) switches  
11 between heterogeneous link-layer technologies. The framework relies on the identification of a  
12 mobility-management protocol stack within the network elements that support the handover. The  
13 description of the framework does not address implementation details and does not provide indica-  
14 tion of preferred implementations of the IEEE 802.21 standard. The framework presents the MIH  
15 Reference models for different link layer technologies.
- 16 b) A set of handover-enabling functions within the protocol stacks of the network elements and the cre-  
17 ation therein of a new entity called the MIH Function. A media independent Service Access Point  
18 (called the MIH\_SAP) and associated primitives are defined to provide MIH users with access to the  
19 services of the MIH Function. The MIH Function provides the following services.  
20 1) The Media Independent Event service detects events and delivers triggers from both local as  
21 well as remote interfaces.  
22 2) The Media independent Command service provides a set of commands for the MIH users to  
23 control handover relevant link states.  
24 3) The Media Independent Information service provides the information model and an informa-  
25 tion repository, for query and response, thus enabling making of more effective handover deci-  
26 sions across different heteroeneous networks.
- 27 c) The definition of new link layer SAPs and associated primitives for each media specific technology.  
28 The new primitives help the MIH Function collect link information and control link behavior during  
29 handovers. If applicable, the new SAPs shall be recommended as amendments to the respective  
30 media specific technology standard specification.  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

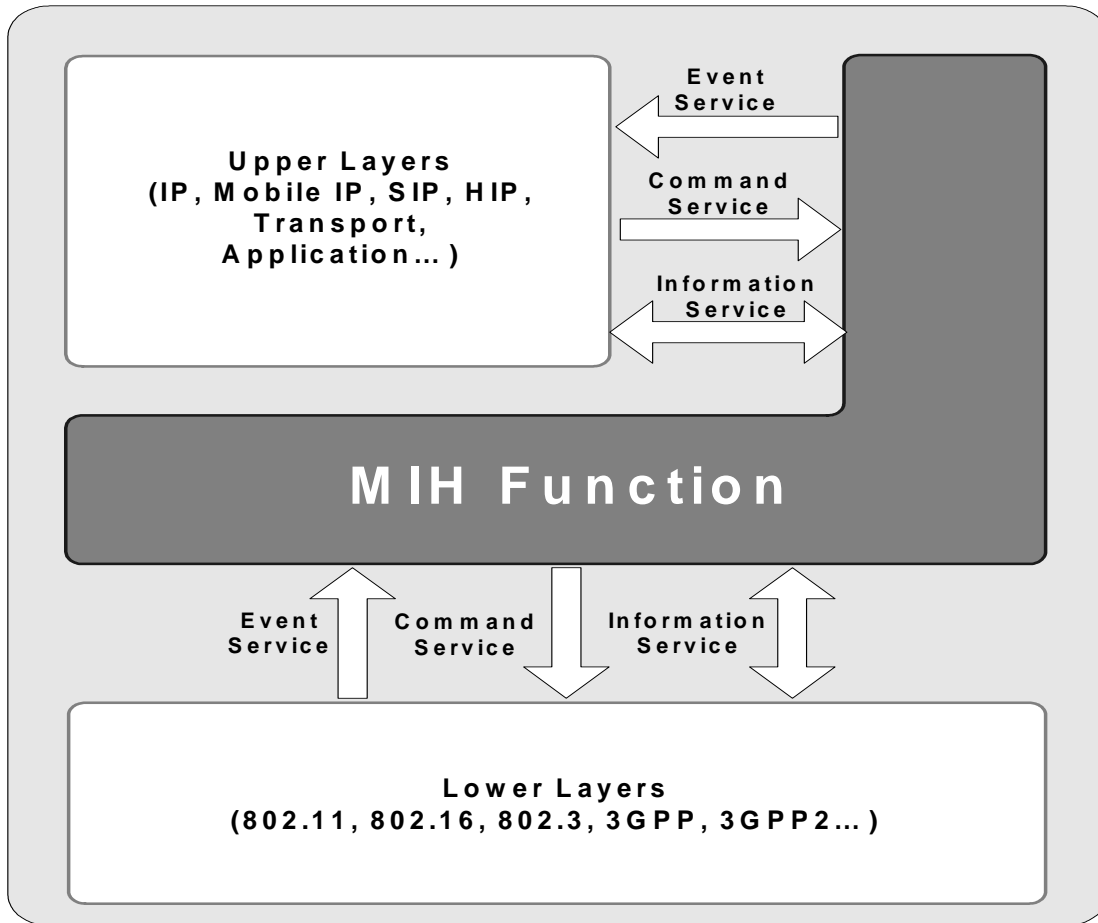

**Figure 1 — MIH Function Location and Key Services**

Figure 1 shows the placement of the MIH Function within the mobility-management protocol stack for handovers associated with heterogeneous link switches. The MIH Function provides services to the upper layers through a single technology-independent interface (the MIH SAP) and obtains services from the lower layers through a variety of technology-dependent interfaces (media-specific SAPs).

### 1.3 Assumptions

The following assumptions have been made in the development of this standard.

- 1) The mobile node is capable of supporting multiple interfaces, which can be both wireless and wired.
- 2) The MIH Function is a logical entity, whose definition has no implications on the way the MIH functionality is implemented either on the mobile node or in the network.
- 3) The MIH Function either on the mobile node or in the network, can receive and transmit information about the performance of access networks around the MN. This information typically originates at different layers of the protocol stack within the MN or other network elements.
  - i) When the information originates at a remote network element, the MIH Function on the mobile node obtains it through MIH message exchanges with a peer MIH Function entity that resides in the remote network element.

- 1  
2  
3  
4  
5  
6  
7
- ii) When the information originates at a lower layer of the protocol stack within the MN, the MIH Function on the mobile node obtains the information locally through the primitives of the (SAPs) that define the interface of the MIH Function with the originating lower layers.

## 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32

### 1.4 Media Independence

The intent of the IEEE802.21 specification is to provide as much generic link layer intelligence as possible without tying the consumers of that intelligence into the features or specifics of particular terminals or radio networks. As such the IEEE 802.21 specification is intended to provide a generic interface between the link layer users in the mobility-management protocol stack and existing media-specific link layers, such as those specified by 3GPP, 3GPP2 and the IEEE 802 family of standards.

### 1.5 Media Dependence

The IEEE802.21 specification shall define generic SAPs and primitives that provide generic link layer intelligence. Individual media specific technologies thereafter need to enhance their media specific SAPs and primitives to satisfy the generic abstractions of the IEEE 802.21 specification. Suitable amendments may be required to link layer (MAC/PHY) specifications of different media specific technologies such as IEEE 802.11, IEEE 802.16, 3GPP, 3GPP2, etc. to satisfy the requirements of generic link layer intelligence identified by 802.21. This process may be carried out once the core elements of the IEEE 802.21 specification are developed.

### 1.6 Inter-operability and Compliance

The following compliance clauses shall be observed:

- 33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65
- 1) An implementation must allow the services described in the MIH\_SAP to be provided to and accessed by an MIH user. The definition of the MIH\_SAP service primitives does not specify how they are to be implemented. However, the formats and semantics of the service parameters of the MIH\_SAP primitives shall be implemented as per IEEE 802.21 and shall be subject to standards compliance.
  - 2) The protocol specified in IEEE 802.21 standard, including message exchanges, protocol data units and the state machine, shall be implemented according to the standard and shall be subject to standards compliance. Various classes of inter-operability and implementation compliance shall be specified based on the set of mandatory and optional features in the specification.

## 2. References

The following standards and technical specifications contain provisions which through references in this text constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below.

IEEE Std 802.11, 1999 Edition [ISO/IEC 8802-11: 1999], Information Technology- Telecommunications and information exchange between system-Local and metropolitan area networks-Specific Requirements-Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

IEEE Std 802.16, 2004 Edition [ISO/IEC 8802-16: 2004], Information Technology- Telecommunications and information exchange between system-Local and metropolitan area networks-Specific Requirements-Part 16: Air Interface for Fixed Broadband Wireless Access Systems.

IEEE Std 802.16, 2004 Edition [ISO/IEC 8802-16: 2004], Information Technology- Telecommunications and information exchange between system-Local and metropolitan area networks-Specific Requirements-Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems (Amendment for Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands).

IEEE Std 802.3-2002, Information Technology- Telecommunications and information exchange between system-Local and metropolitan area networks-Specific Requirements-Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications.

3GPP TS 23.002, "Network Architecture."

3GPP TS 23.060, "General Packet Radio Service (GPRS); Service Description; Stage 2."

3GPP TS 23.234, "3GPP system to Wireless Local Area Network (WLAN) inter-working; System description."

3GPP TR 24.007 "Mobile Radio Interface Signaling Layer 3"

3GPP TS 25.331 "Radio Resource Control Specification"

3GPP TR 43.901 "Feasibility Study on Generic Access to A/Gb Interface."

IETF RFC 3753, "Mobility Related Terminology", J. Manner, M. Kojo

IETF RFC 1661, "The Point-to-Point Protocol (PPP) ", W. Simpson, July 1994

IS-2000.4-D "Signaling Link Access Control (LAC) Standard for cdma2000 Spread Spectrum Systems - Release D"

W3C Recommendation, "RDF Vocabulary Description Language 1.0: RDF Schema", <http://www.w3.org/TR/rdf-schema/>.

W3C Recommendation, "SPARQL Query Language for RDF", <http://www.w3.org/TR/2004/WD-rdf-sparql-query-20041012/>.

W3C Recommendation, "Resource Description Framework (RDF) – Concepts and Abstract Syntax", <http://www.w3.org/TR/rdf-concepts/>.

W3C Recommendation, "RDF/XML Syntax Specification", <http://www.w3.org/TR/rdf-syntax-grammar/>.

1 W3C Recommendation, "OWL Web Ontology Language Reference", <http://www.w3.org/TR/owl-ref/>.

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

IEEE P802.21 Media Independent Handover Service, Document 21-04-0087-12-0000, Draft Technical Requirements, Sept. 21, 2004. Available at: [http://www.ieee802.org/21/sept04\\_meeting\\_docs/21-04-0087-12-0000-Draft\\_Technical\\_Requirements.doc](http://www.ieee802.org/21/sept04_meeting_docs/21-04-0087-12-0000-Draft_Technical_Requirements.doc)

NOTE—The IEEE standards referred to in this clause are trademarks of the Institute of Electrical and Electronics Engineers, Inc.

### 3. Definitions

*For the purpose of this standard, the following terms and definitions apply.*

**Handover** – The process by which a mobile node obtains the preservation of facilities for supporting traffic flows upon occurrence of a link-switch event. The mechanisms and protocol layers involved in the handover may vary with the type of the link-switch event (i.e., with the type of the serving and target point of attachment and the respective subnet associations). Different types of handover are defined based on the way facilities for supporting traffic flows are preserved.

*Hard Handover* – Handover where facilities for supporting traffic flows are subject to complete unavailability between their disruption on the serving link and their restoration on the target link (break-before-make).

*Soft Handover* – Handover where facilities for supporting traffic flows are continuously available while the mobile-node link-layer connection transfers from the serving point of attachment to the target point of attachment. The network allocates transport facilities to the target point of attachment prior to the occurrence of the link-switch event (make-before-break).

*Seamless Handover* – Handover associated with a link switch between heterogeneous interfaces, where the mobile node either experiences no degradation in service quality, security, and capabilities, or experiences some degradation in service parameters that is mutually acceptable to the mobile subscriber and to the network that serves the newly connected interface.

**Handover Policies** – A set of rules that contribute to shaping the handover decision for a mobile node.

**Higher Layers** – These are the layers that make use of the services provided by the MIH Function and hence can be referred to as MIH users. Examples of higher layers are: IP, Mobile IP, SIP, TCP, UDP, Application layer, etc.

**Link** – A communication facility or medium over which L2 network nodes can communicate for exchange of L2 messages. Each link is associated with a minimum of two endpoints. Each link endpoint has a unique link-layer identifier.

**Link Layer** – Conceptual layer of control or processing logic that is responsible for maintaining control of the data link. The data link layer functions provide an interface between the higher-layer logic and the data link.

**Link Indication** – Information provided by the link layer to higher layers regarding the state of a link.

**Link Switch** – The process by which a mobile node changes the link that connects it to the network. Changing link implies changing the remote link endpoint and therefore the point of attachment of the mobile node.

**Lower Layers** – These are the layers located at OSI Level 2 and below across different media specific technology standards supported by the 802.21 specification. As an example, for 802.11 Lower Layers are the MAC Layer and the PHY layer and for 3GPP Lower Layers are the MAC and UMTS layers. The term "Lower Layers" also includes Logical Link Control Layers such as 802.2 LLC or 3GPP RLC. The MIH Function uses the services provided by these layers.

**Message** – The sequence of contiguous octets delivered as a unit by the N-user to the N-SAP and destined for a remote N-user.

**MIH Network Entity** – Network Entity with MIH Function capability.

**MIH Function** – A functional implementation of MIH services.

1 **MIH Pairing** – The communication relationship that exists between distinct MIH-Function instances when  
2 they exchange MIH messages or MIH information.  
3

4 **MIH Point of Service (MIH PoS)** – Network-side MIH-Function instance that exchanges MIH messages  
5 with a MN-based MIH Function. The same MIH Network Entity includes a distinct MIH PoS for each MIH-  
6 enabled MN with which it exchanges MIH messages. A single MIH PoS may host more than one MIH ser-  
7 vice. The same MIH Network Entity can include multiple MIH Point of Services that can provide different  
8 combinations of MIH services to the respective MN's based on subscription or roaming conditions. Note for  
9 a network entity comprising of multiple interfaces, the notion of MIH PoS is associated with the network  
10 entity itself and not with just one of its interfaces.  
11

12 **MIH PoS Network Entity** – MIH Network Entity that can exchange MIH messages with MIH-enabled  
13 MN.  
14

15 **MIH Users** – MIH users are entities that use the services provided by the MIH Function. MIH Users use the  
16 MIH\_SAP SAP to interact with the MIH Function.  
17

18 **Mobile Node** – Network node that can change its point of attachment from one link to another at any time.  
19 The mobile node can either be in close proximity of or coincide with the mobile terminal.  
20

21 **Mobile Node Association** – The connectivity state where the mobile node is ready to exchange user data  
22 (like TCP/UDP packets) with the network point of attachment.  
23

24 **Mobile Terminal** – User interfacing network node that includes protocol stack layers above the link layer.  
25 The mobile terminal can either be in close proximity of or coincide with the mobile node.  
26

27 **N-entity** – Abstraction of a functional component of a network element, whose control resides within the N-  
28 layer. See also peer N-entity.  
29

30 **N-event** – A change of state in an entity whose control resides within the N-layer (N-entity). An N-event can  
31 be notified to an N-user through an indication service primitive, or stimulated by an N-user through a  
32 request service primitive.  
33

34 **N-layer** – A subdivision of the layered protocol architecture, constituted by subsystems of the same rank  
35 (N).  
36

37 **N-trigger** – N-event notification to an N-user, typically conveyed by an indication service primitive. See  
38 also remote N-trigger.  
39

40 **N-user** – An (N+1)-layer entity that uses the services of the N-layer and lower layers to communicate with  
41 another (N+1)-layer entity.  
42

43 **Network Detection** – The process by which a mobile node collects information on its neighboring net-  
44 works, identifies its current point of attachment, and ascertains the validity of its link-layer configuration.  
45

46 **Network Entity** – Communication node inside the network.  
47

48 **Network Point of Attachment (Network PoA)** – Network-side endpoint of a link that includes a MN as an  
49 endpoint. Note: The PoA definition is associated with an interface instead of a node. Here, the term 'net-  
50 work' means subnet, or subnet + VLAN, or broadcast domain, or routing domain, as opposed to media type  
51 or the entire set of connections behind the PoA. Two network points of attachment are involved in a link  
52 switch event as follows:  
53

54 *Serving Point of Attachment* – The point of attachment of the mobile node prior to the link-switch event.  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

1 *Target Point of Attachment* – The point of attachment of the mobile node that results from the link-switch  
2 event.  
3

4 **Network Selection** – The process by which a mobile node or a network entity collects policy information on  
5 its neighboring networks and selects a link (possibly out of many available) to establish network-layer con-  
6 nectivity.  
7

8  
9 **Network Selector** – The entity that undertakes the Network Selection decision that may lead to a handover.  
10

11 **Non-PoS MIH Network Entity** – The MIH Network Entity that cannot exchange MIH messages with MIH  
12 enabled MN, but only with other MIH Network Entities.  
13

14 **Peer N-entity** – N-entity residing in a network element, defined with reference to its N-layer communica-  
15 tion (messaging) with another N-entity in a different network element. See also N-entity.  
16

17 **Protocol Data Unit** – The sequence of contiguous octets delivered as a unit by the N-user to the N-SAP and  
18 destined for a remote N-user.  
19

20 **Remote N-trigger** – Notification to an N-user of an N-event affecting a remote N-entity, typically conveyed  
21 by the sequence of an N-PDU transmitted from the remote N-entity to the local N-entity and an indication  
22 service primitive passed from the local N-entity to the destination N-user. See also N-trigger.  
23

24 **Service Access Point (SAP)** – The point in a protocol stack where the services of a lower layer are made  
25 available to its next higher layer.  
26

27 **Service Continuity** – Transparent maintenance of an active service while the mobile node transitions across  
28 wireless or wire-line coverage.  
29

30 **Service Data Unit** – The sequence of contiguous octets transmitted as a unit from one N-SAP to another N-  
31 SAP.  
32

33 **Service Primitive** – Conceptual abstraction describing the information transfer that occurs between N-user  
34 and N-layer in the provision of a service. The abstraction resides in the exclusive specification of the service  
35 provided and not in the means by which the service is provided.  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

## 4. Abbreviations and acronyms

The following abbreviations and acronyms are used in this standard.

1		
2		
3		
4		
5		
6	3G	Third Generation
7	3GPP	3G Partnership Project
8	3GPP2	3G Partnership Project 2
9		
10	AAA	Authentication, Authorization, and Accounting
11	ACK	Acknowledgement
12	AN	Access Network
13	ANI	Access Network Information
14	AP	Access Point
15	AR	Access Router
16	AS	Access Stratum
17	ASN.1	Abstract Syntax Notation One
18	BS	Base Station
19	BSC	Base Station Controller
20	BSSID	Basic Service Set Identifier
21	BTS	Base Transceiver Station
22	ESS	Extended Service Set
23	CN	Core Network
24	CS	Convergence Sublayer
25	CSME	Convergence Sublayer Management Entity
26	FA	Foreign Agent
27	FMIP	Fast Handover Mobile IP
28	GGSN	Gateway GPRS Support Node
29	GMII	Gigabit Media Independent Interface
30	GMM	GPRS Mobility Management
31	GPRS	General Packet Radio Service
32	GSM	Global System for Mobile Communication
33	HA	Home Agent
34	HIP	Host Identity Protocol
35	HLSI	Higher Layer Service Information
36	HMIP	Hierarchical Mobile IP
37	ICMP	Internet Control Message Protocol
38	IEEE	Institute of Electrical and Electronics Engineers
39	IETF	Internet Engineering Task Force
40	ICMP	Internet Control Message Protocol
41	IP	Internet Protocol
42	ISP	Internet Service Provider
43	ITU	International Telecommunications Union
44	L1	Layer 1 (PHY)
45	L2	Layer 2 (MAC and LLC)
46	L3MP	Layer 3 Mobility Management Protocol
47	LAN	Local Area Network
48	LLC	Logical Link Control
49	LLI	Link Layer Information
50	LTE	Long Term Evolution
51	MAC	Medium Access Control
52	MAP	Mobility Anchor Point
53	MDI	Medium Dependent Interface
54	MICS	Media Independent Command Services
55	MIES	Media Independent Event Services
56	MII	Media Independent Interface
57		
58		
59		
60		
61		
62		
63		
64		
65		

1	MIH	Media Independent Handover
2	MIHO	Media Independent Handover
3	MIHF	Media Independent Handover Function
4	MIHS	Media Independent Handover Services
5	MIIS	Media Independent Information Service
6	MIP	Mobile IP
7	MLME	MAC Layer Management Entity
8	MMS	Multimedia Message Service
9	MN	Mobile Node
10	MS	Mobile Station
11	MSS	Mobile Subscriber Station
12	MSDU	Medium Access Control (MAC) Service Data Unit
13	MSME	MAC Common Part Sublayer Management Entity
14	MT	Mobile Terminal
15	N/A	Not Applicable
16	NAS	Non-access Stratum
17	NAK	Negative Acknowledgement
18	NMS	Network management system
19	PCS	Physical Coding Sublayer
20	PHY	Physical Layer
21	PLMN	Public Land Mobile Network
22	PLME	Physical Layer Management Entity
23	PMA	Physical Medium Attachment
24	PMD	Physical Medium Dependent
25	PoA	Point of Attachment
26	PoS	Point of Service
27	QoS	Quality of Service
28	RFC	Request for Comment
29	RLC	Radio Link Control
30	RNC	Radio Network Controller
31	RRC	Radio Resource Control
32	SAE	System Architecture Evolution
33	SAP	Service Access Point
34	SDO	Standards Development Organization
35	SDU	Service Data Unit
36	SGSN	Serving GPRS Support Node
37	SM	Session Management
38	SME	Station Management Entity
39	SNDCP	Sub-Network Data Convergence Protocol
40	SNR	Signal-to-Noise Ratio
41	SS	Subscriber Station
42	STA	Station
43	TCP	Transmission Control Protocol
44	TLV	Type-Length-Value message
45	UDP	User Datagram Protocol
46	UE	User Equipment
47	UMTS	Universal Mobile Telecommunications System
48	VPN	Virtual Private Network
49	WLAN	Wireless Local Area Network
50	WMAN	Wireless Metropolitan Area Network
51	WPAN	Wireless Personal Area Network
52	XML	Extensible Mark-up Language
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		

## 5. General Architecture

### 5.1 Introduction

The IEEE 802.21 specification is intended to facilitate a variety of handover methods. Such methods are generally classified as 'hard' or 'soft', depending on whether the handover procedure is “break before make” or “make before break” with respect to the data transport facilities that support the exchange of data packets between the mobile node and the network.

In general, handover involves cooperative use of both mobile terminal and network infrastructure in order to satisfy network operator and end user needs. Handover control, handover policies and other algorithms involved in handover decision making are generally handled by communication system elements which do not fall within the scope of the IEEE 802.21 standard. However, it is beneficial to describe certain aspects of the overall handover procedure so that the role and purpose of MIH Event Service, MIH Command Service, MIH Information Service and MIH Function in overall handover process is clear.

The following subsections give an overview of how the different factors that may affect handovers are addressed within the current standard.

#### 5.1.1 Service Continuity

Handovers may occur either between two different access networks or between two different points of attachment of a single access network. In such cases service continuity is defined as the continuation of the service during and after the handover while minimizing aspects such as data loss and break time during the handover without requiring any user intervention. The change of access network may or may not be noticeable to the end user, but there should be no need for the user to re-establish the service. There may be a change in service quality as a consequence of the transition between different networks due to the varying capabilities and characteristics of the access networks. For example if the QoS supported by new access network is unacceptable, higher layer entities may decide not to handover or may terminate the current session after the handover based on applicable policies. This specification specifies essential elements which enable service continuity.

#### 5.1.2 Application Class

Various applications have different tolerance characteristic for delay and data loss. Application aware handover decisions can be enabled by making a provision for such characteristics. For example, when a network transition due to impending handover is made during the pause phase of conversation in an active voice call, the perceptible interruption in the service is minimized.

#### 5.1.3 Quality of Service (QoS)

QoS is an important factor to consider in the handover decision making. In general the handover decision entity shall try to select the network with the most appropriate QoS support level for handover in an effort to maintain the level of user experience. Hence to enable seamless handover operations, it is necessary that the 802.21 standard specify the means by which QoS information can be obtained for each of the supported access networks and be made available to the upper layers involved in handover decision making.

#### 5.1.4 Network Discovery

Network discovery is essential to provide new possibilities for network selection to suit the need of the applications and mobility. Thus, it is necessary that 802.21 defines the network information and specifies the means by which such information can be obtained for supported access networks and made available to the

1 MIH users. The network information could include information about link type, link identifier, link avail-  
2 ability, link quality, etc.  
3

#### 4 **5.1.5 Network Selection**

7 Network Selection is the process by which a mobile node or a network entity collects policy information on  
8 its neighboring networks and selects a link (possibly out of many available) to establish network-layer con-  
9 nectivity. The selection can be based on various criteria such as required QoS, cost, user preferences, poli-  
10 cies, etc. If the selected network is not the currently used network, then a handover to the preferred network  
11 may be required. The 802.21 standard may specify the means for such information to be made available to  
12 the upper layers to enable effective network selection.  
13  
14

#### 15 **5.1.6 Security**

17 Events, commands and information messages carried between a MT (Mobile Terminal) and a network PoA  
18 (Point of Attachment) cannot be secured until the MT is securely associated with the network PoA. This  
19 association can be achieved either via lower or higher layers security mechanisms. Once such a secure  
20 association has been established between the MT and the network PoA, any messages exchanged between  
21 two MIH Function entities should retain integrity and be replay protected over a secure transport. Otherwise  
22 the exchanged MIH messages are prone to integrity, replay and man-in-the-middle attacks. The 802.21 stan-  
23 dard may specify the means for security information to be made available to the upper layers to setup secure  
24 connections.  
25  
26  
27

#### 28 **5.1.7 Power Management**

30 This specification provides information that helps to preserve battery life. For example efficient 'sleep  
31 modes' can be managed based on real time link status, efficient scanning is achieved using neighbor maps of  
32 different networks and readily available reports of optimum link layer parameters. Power management is  
33 dependent on particular access technology in use.  
34  
35  
36

#### 37 **5.1.8 Handovers due to Mobile Terminal Movement**

39 Handovers due to the mobile node movement are facilitated by providing timely information about changing  
40 link conditions and different access networks in neighboring micro and macro cells.  
41  
42

#### 43 **5.1.9 Handover Policy**

45 The primary role of the MIH Function is to facilitate handovers and provide intelligence to the network  
46 selector entity or the mobility management entity responsible for handover decision as described by other  
47 standards or proprietary implementations. The MIH Function aids the network selector entity with the help  
48 of Event service, Command service and Information service. The network selector entity and the handover  
49 policies that control handovers are outside the scope of MIH Function. Description of specific handover poli-  
50 cies and the details of network selector entity are outside the scope of 802.21 standards as well.  
51  
52

54 The IEEE 802.21 specification defines services that enhance handovers between heterogeneous access links.  
55 This is achieved through facilitating handover process by providing link layer intelligence relevant in han-  
56 dover detection, handover initiation and candidate link selection by MIH user.  
57

- 58 1) A Media Independent Event Service (MIES) which provides event classification, event filter-  
59 ing and event reporting corresponding to dynamic changes in link characteristics, link status,  
60 and link quality.
- 61 2) A Media independent Command Service (MICS) which enables MIH user to manage and con-  
62 trol link behavior relevant to handovers and mobility.  
63  
64  
65

- 3) Media Independent Information Service (MIIS) which provides details on the characteristics and services provided by the serving and surrounding networks. The information enables effective system access and effective handover decisions.
- 4) The above services are supported by the Media Independent Handover Function (MIHF) to facilitate a MIH user in mobility management and handover process. The MIH Function provides convergence of link-layer state information from multiple heterogeneous access technologies into a unified presentation to the upper layers of the mobility-management protocol stack.

## 5.2 General Design Principles


The 802.21 standard is based on the following general design principles.

- a) The Media Independent Handover (MIH) Function is logically defined as a shim layer in the mobility-management protocol stack of both the mobile node and the network elements that provide mobility support. MIH is a helper and facilitator function which helps in handover decision making. Upper layers make handover decisions and link selection based on inputs and context from MIH. Facilitating the recognition that a handover should take place is one of the key goals of MIH Function. Discovery of information on how to make effective handover decisions is also a key component.
- e) MIH Function provides abstracted services to higher layers. From that perspective MIH offers a unified interface to the upper layers. The service primitives exposed by this unified interface are independent of the technology specific protocol entities of the different access networks. The MIH Function communicates with the lower layers of the mobility-management protocol stack through technology-specific interfaces. The specification of the MIH interfaces with the lower layers generally does not fall within the scope of this standard. Such interfaces are already specified as service access points (SAPs) within the standards that pertain to the respective access technologies, such as IEEE 802.1, IEEE 802.3, IEEE 802.11, IEEE 802.16, 3GPP and 3GPP2. This standard may contain recommendations to amend the existing access technology specific standards when modifications of the lower-layer interfaces may enable or enhance MIH functionality.
- f) Handover signaling (as part of handover execution and subsequent updates) may not be part of the standard. Different networks support different intra-roaming handover mechanisms (mobile initiated, network initiated, etc.). Handover initiation trigger may be useful in heterogeneous handovers when not done as per the homogeneous scheme.
- g) MIH Function may do further processing on MAC/PHY triggers and other related events. Definition of this processing is outside the scope of the standard. The standard shall provide support for Remote Events as well. Some of these events may encapsulate messages related to network selection (such as Link Going Down) that may be exchanged between different MIH entities. Events are advisory in nature. The decision to cause a handover or not based on these events is outside the scope of the standard.
- h) The standard shall specify mechanisms to support MN-initiated, MN-controlled, network-initiated and network-controlled handovers.
- i) The standard should support transparent inter-working with legacy equipment. Thus 802.21 compatible equipment should be able to co-exist with legacy non 802.21 compliant equipment.

## 5.3 Media Independent Handover Reference Framework

The following sections describe the key salient points with regards to communication between different MIH entities in the client device (MN) and the network.

### 5.3.1 MIH Communication Model

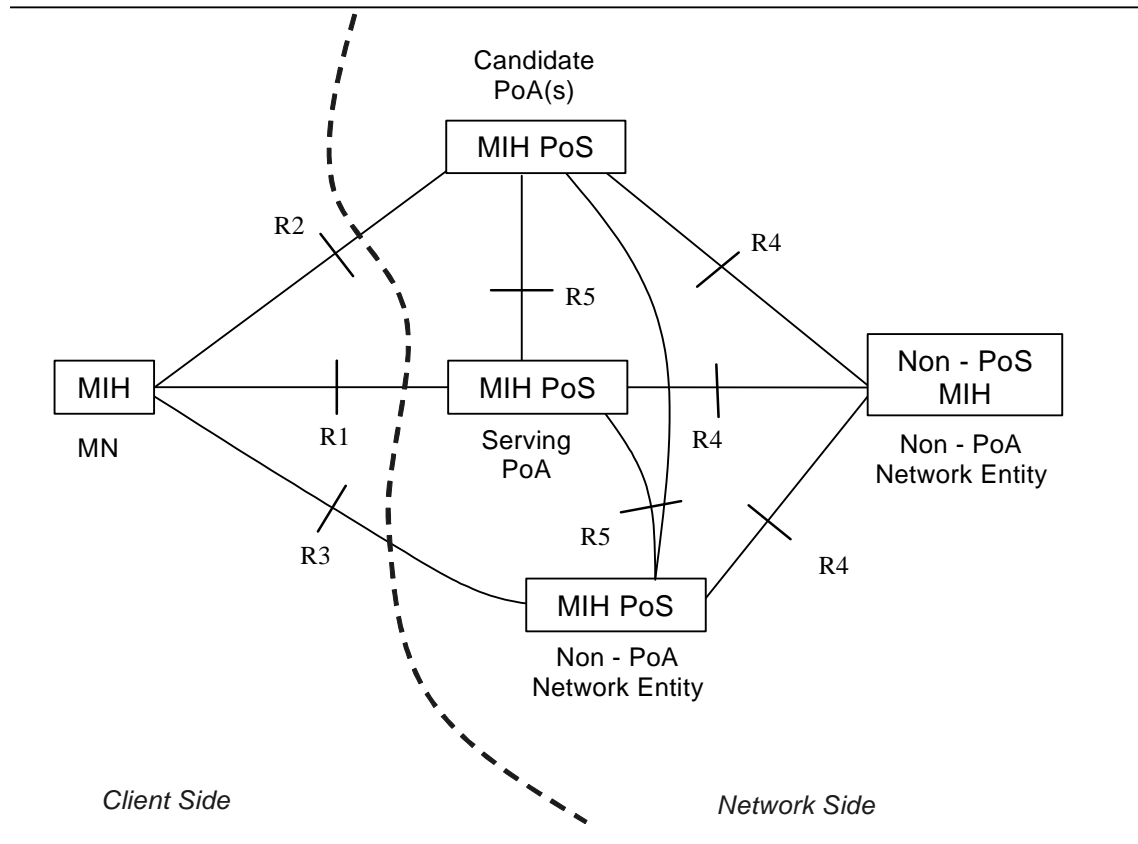

**Figure 2 — MIH Communication Model**

MIH functions communicate with each other for various purposes. The client device (User Equipment) exchanges MIH information with its MIH Point of Service. The MIH function in any Network Entity becomes a MIH PoS when it communicates directly with a MN based MIH function. In a network model that encompasses a MIH proxy, the MIH Network Entity that interfaces with the MIH proxy does not have a direct connection to the MN and therefore does not constitute a MIH PoS for that particular MN. The same MIH Network Entity can still act as MIH PoS for a different MN.

MIH communication may not take place on all L2 interfaces of a MIH capable MN. As an example, on an MIH capable MN with three L2 interfaces namely 802.11, 802.16, and 802.3, the 802.3 interface may be used only for system administration and maintenance operations, while the 802.11 and 802.16 interfaces may engage in the provision of MIH services. The MN may use L2 transport for exchanging MIH information with a MIH PoS that resides in the same Network Entity as its Network PoA. The MN may use L3 transport for exchanging MIH information with a MIH PoS that may not reside in the same Network Entity as its Network PoA.

Figure 2 — shows the MIH communication model. The model shows MIH Functions in different distinctive roles and the communication relationships amongst them. The communication relationship shown in the above figure applies only to MIH Functions. It is important to note that each of the communication relationships in the communication model does not imply a particular interface or transport mechanism. Rather, a communication relationship only intends to show that MIH related information passing is possible between

the two distinctive MIH Functions. Moreover, each communication relationship shown in the diagram may encompass different type of interfaces, different transport mechanisms used (e.g., L2, L3), and different MIH service related content being passed (e.g., IS, CS, ES, etc.).

The communication model assigns different roles to the MIH Function depending on its position in the system.

- 1) MIH on the MN
- 2) MIH PoS on the Network Entity that includes the serving PoA of the MN
- 3) MIH PoS on the Network Entity that includes a candidate PoA for the MN (a candidate PoA is a PoA that the MN is aware of but not currently attached to; it becomes the target PoA if a handover eventually occurs)
- 4) MIH PoS on a Network Entity that does not include a PoA for the MN
- 5) Non-PoS MIH on a Network Entity that does not include a PoA for the MN.

The communication model also identifies the following communication reference points between different instances of MIH Functions.

- 1) **Communication reference point R1:** Reference Point R1 refers to MIH procedures between the MIH Function on the MN and the MIH PoS on the Network Entity of its serving PoA. R1 may encompass communication interfaces over both L2 and L3 and above, and content passed over R1 can be related to MIIS, MIES, or MICS.
- 2) **Communication reference point R2:** Reference Point R2 refers to MIH procedures between the MIH Function on the MN and the MIH PoS on the Network Entity of a candidate PoA. R2 may encompass communication interfaces over both L2 and L3 and above, and content passed over R2 can be related to MIIS, MIES, or MICS.
- 3) **Communication reference point R3:** Reference Point R3 refers to MIH procedures between the MIH Function on the MN and the MIH PoS on a non-PoA Network Entity. R3 may encompass communication interfaces over L3 and above and possibly L2 transport protocol like Ethernet bridging, MPLS, etc. MIH content passed over R3 may be related to MIIS, MIES, or MICS.
- 4) **Communication reference point R4:** Reference Point R4 refers to MIH procedures between an MIH PoS in a Network Entity and a non-PoS MIH Function instance in another Network Entity. R4 may encompass communication interfaces over L3 and above, and MIH content passed over R4 may be related to MIIS, MIES, or MICS.
- 5) **Communication reference point R5:** Reference Point R5 refers to MIH procedures between two MIH PoS instances in distinct Network Entities. R5 may encompass communication interfaces over L3 and above, and MIH content passed over R5 may be related to MIIS, MIES, or MICS.

**Table 1—Summary of Communication Reference Points**

Reference Point	Description	Transport Choices	Scope of Definition
R1	Between the MIH on a MN and an MIH PoS on the Network Entity of the serving PoA.	Usually L2 (L3 possible)	In scope of 802.21
R2	Between the MIH on a MN and a MIH PoS on the Network Entity of the candidate PoA.	Usually L2 (L3 possible)	In scope of 802.21
R3	Between the MIH on a MN and a MIH PoS on a non-PoA network entity.	Usually L3 (L2 possible)	In scope of 802.21

**Table 1—Summary of Communication Reference Points**

Reference Point	Description	Transport Choices	Scope of Definition
R4	Between a MIH PoS and a non-PoS MIH Function instance in distinct Network Entities.	Usually L3	In scope of 802.21
R5	Between two MIH PoS instances in distinct Network Entities.	Usually L3	In scope of 802.21

### 5.3.2 Logical Network Reference Model

A MIH logical network reference model is shown in Figure 3. The model includes a MIH capable mobile node that supports multiple access-technology options. Each access technology either advertises its MIH capability or responds to MIH terminal queries. The model assumes that the provisioning service provider either operates multiple access technologies or allows its user to roam into visited networks when SLA in support of interworking has been established. The service provider allows access to one or more Points of Service including access to the operator's Information Server located in a MIH PoS node. When provisioned the MN relies on periodic access to its operator MIIS to obtain pertinent information such as new roaming lists, priorities and any other related information that would enable to utilize services in various access networks. It is possible for the mobile node to also obtain MIH information services from the visited network to obtain information about the visited network or information elements from the home network via the visited network PoS. On the network side, the location of a MIH PoS node is not deterministic and may vary based on operator deployment scenario or the technology-specific MIH architecture. A MIH PoS may reside next to or co-located with the PoA in the access network or alternatively deeper inside the access or core networks. The interaction of visited and home network could be either for control and management purposes or for data transport purposes. It is also possible that due to roaming or SLA agreements, the home network may allow the MN to access the public Internet directly through the visited network.

As shown in Figure 3, the MIH entity in the MN could be communicating with MIH network entities either by R1, R2 or R3 over any access network and two MIH network entity communicate with each other via R4 or R5 reference points. When the PoA in the serving access network has a co-located MIH function, then R1 reference point terminates at PoA while the R3 reference point would be terminated at any non-PoA MIH network entity located either in the visited core network or the home network. The MIH capable PoA can also communicate with other MIH network entities via R3 and R4 reference points. The MIH capable MN could have a MIH communication with other PoA in the candidate access networks via R2 reference point to obtain information services about the candidate network. The IEEE 802.3 enabled wire-line access network may work in a similar fashion to the wireless access network if the MN were to use the home operator subscription services. Although not shown in the current figure, in an enterprise environment the 802.3 wire-line access may gain direct access to the Internet from its PoA.

In Figure 3, the cellular access network is shown to be owned by the home operator that provisioned the user, however it is possible that cellular roaming may involve accessing other cellular access networks owned by other networks when SLA is established. For cellular access cases, the definition and location of PoA will be determined by the relevant cellular standard or the network operator (e.g. BS or RNC or GGSN in 3GPP and PDSN in 3GPP2). For this reason, the location of the PoA could either be in the visiting network or the home operator network. Hence, reference points R1 is shown to terminate MIH PoS and PoA at the cellular home network when the MIH PoA is located at the GGSN/PDSN elements. The home network may utilize R3 and R4 interfaces to access other MIH entities like the Home or Visited MIH information server.

Events can originate at both sides of an active R1 link. However, the MN is typically the first node to react to link-state change events. The overall mobility management architecture may include Mobile IP infrastruc-

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

ture (client, FA, HA, H-AAA), SIP mobility infrastructure (client, SIP servers), combination of the two (MIP and SIP) or any other mobility schemes. The mobility management is not part of the MIH architecture but may be one of its users. Mobility management entities are merely shown as a possible scenario of interaction with mobility and security frameworks.

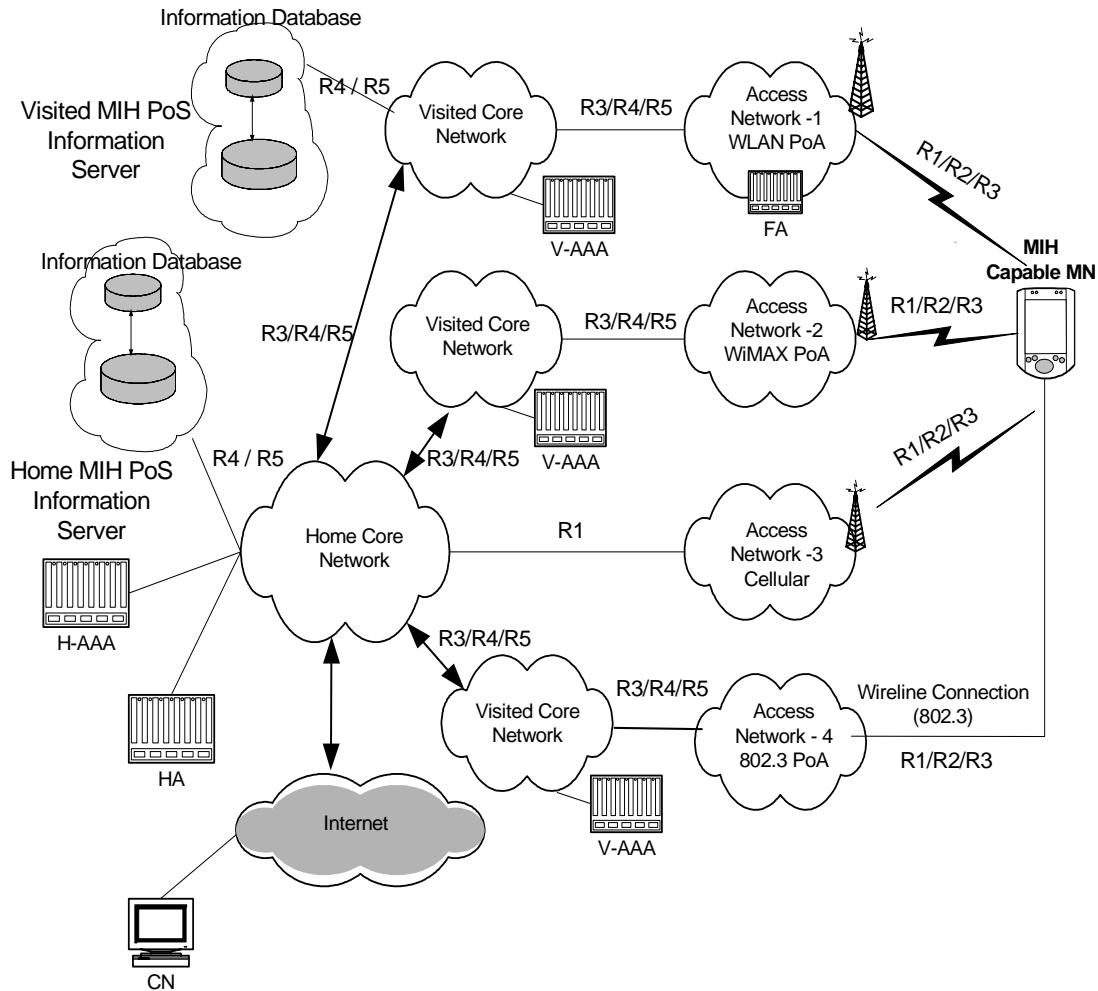


Figure 3 — Logical Network Reference Model

#### 5.4 MIH Function Services

The MIH Function provides asynchronous and synchronous services through well defined SAPs for link layers and MIH users. In the case of a system with multiple network interfaces of arbitrary type, the upper layers can use the Event service, Command service and Information service provided by MIH to manage, determine, and control the state of the underlying interfaces.

These services provided by MIH help the upper layers in maintaining service continuity, service adaptation to varying quality of service, battery life conservation, and network discovery and link selection. In a system

1 containing heterogeneous network interfaces of 802 types and cellular 3GPP, 3GPP2 types, the Media Inde-  
2 pendent Handover Function can help the upper layers to implement effective procedures to couple services  
3 across heterogeneous network interfaces. Upper layers may utilize services provided by the MIH Function  
4 across different entities to query and reserve resources required for a handover operation between heteroge-  
5 neous networks.  
6

7  
8 MIH services in mobile devices facilitate seamless handover between heterogeneous networks. A MIH user  
9 such as a mobility management protocol (example Mobile IP) could be supported for handover and seamless  
10 session continuity. This shall not preclude other protocols in addition to Mobile IP and even other upper lay-  
11 ers from making use of MIH services to optimize handovers.  
12

13  
14 Mobile terminals employing the MIH services would receive indications from link layers for asynchronous  
15 operations like Event service. The interaction with Command service and Information service will be  
16 through synchronous query and response type of mechanisms.  
17

18  
19 The MIH Function would also provide the functionality for the exchange of information between the net-  
20 work and host entities of the same media type. Note, if mechanism for such information exchange already  
21 exists with a given type of media (such as with some cellular media types), the MIH Function will make use  
22 of the existing mechanism whenever possible.  
23

#### 24 **5.4.1 Media Independent Event Service**

25  
26  
27 Events can indicate changes in state and transmission behaviour of the physical, data link and logical link  
28 layers, or predict state changes of these layers. The Event Service can also be used to indicate management  
29 actions or command status on part of network or some such management entity.  
30

##### 31 **5.4.1.1 Event Origination**

32  
33 Events can originate from the MIH Function (MIH Events) or any lower layer (Link Events).  
34

##### 35 **5.4.1.2 Event Destination**

36  
37 The destination of an event may be the MIH Function or any upper layer entity. The recipient of the event  
38 can be located within the stack that originated the event or within a remote stack . The destination of an  
39 event is established dynamically with a registration mechanism that enables an endpoint to register its inter-  
40 est in particular event types.  
41

##### 42 **5.4.1.3 Event Flow**

43  
44 In case of local events, messages typically propagate from the lower layers (PHY, MAC, GMM...) to the  
45 MIH Function and from MIH Function to any upper layer. In case of remote events, messages propagate  
46 from the MIH Function in one stack to the MIH Function in the peer stack. Events may then be further prop-  
47 agated to any upper layer. One of the stack may be present in a client or mobile terminal type of device while  
48 the other may be present in a fixed network entity. This network entity can be a point of attachment or any  
49 node not directly connected to the other stack.  
50

##### 51 **5.4.1.4 Event service use cases and functions**

52  
53 The event service will typically be used to detect need for handovers. For example an indication that the link  
54 will cease to carry MAC SDUs at some point in the near future may be used by upper layers to prepare a new  
55 point of attachment ahead of the current point of attachment ceasing to carry frames. This has the potential  
56 to reduce the time taken to handover between attachment points. Events defined include Link Up, Link  
57 Down, Link Parameters Change, Link Going Down, and L2SDU Transmission Status, Link Event Rollback,  
58 etc.  
59  
60  
61  
62  
63  
64  
65

1 Events may carry additional context data. For example a Link Up event may carry information including  
2 layer 2 & layer 3 identification, identifier of serving entities where these identifiers can be acquired. A Link  
3 Up event may also carry IP address renewal indication which can inform upper layers of the need to initiate  
4 a layer 3 handover . This can serve to improve the performance of layer 3 handovers.  
5  
6

## 7 **5.4.2 Media Independent Command Service**

8  
9 The command service enables higher layers to control the physical, data link and logical link layers (also  
10 know as "lower layers"). The higher layers may control the reconfiguration or selection of an appropriate link  
11 through a set of handover commands.  
12  
13

### 14 **5.4.2.1 Command Origination**

15  
16 Commands can be invoked from upper layers (MIH Commands) as well as from the MIH Function (Link  
17 Commands).  
18  
19

### 20 **5.4.2.2 Command Destination**

21  
22 The destination of a command may be the MIH Function or any lower layer. The recipient of a command  
23 can be located within the stack that originated the command, or within a remote stack.  
24  
25

### 26 **5.4.2.3 Command Flow**

27  
28 In case of local commands, messages typically propagate from the upper layers (policy engine...) to the  
29 MIH Function and then from MIH Function to lower layers. In case of remote commands, messages may  
30 propagate from upper layers via MIH Function in one stack to the MIH Function in a peer stack (with the use  
31 of the MIH Protocol). Commands may then be further propagated to any lower layer. One of the stack may  
32 be present in a client or mobile terminal type of device while the other may be present in a fixed network  
33 entity. This network entity can be a point of attachment or any node not directly connected to the other stack.  
34  
35  
36

### 37 **5.4.2.4 Command service use cases**

38  
39 The commands generally carry the upper layer decisions to the lower layers on local device entity or at  
40 remote entity. For example the command service may be used by the policy engine of an entity in the net-  
41 work to request a terminal to switch between links (remote command to lower layers on terminal stack).  
42 Comamnds defined include MIH\_Switch, MIH\_Get\_Status, etc.  
43  
44

## 45 **5.4.3 Media Independent Information Service**

46  
47 Media Independent Information Service (MIIS) provides a framework and corresponding mechanisms by  
48 which a MIHF (Media Independent Handover Function) entity can discover and obtain network information  
49 existing within a geographical area to facilitate the handovers. MIIS primarily provides a set of information  
50 elements (IEs), the information structure and its representation and a query/response type of mechanism for  
51 information transfer. This contrasts with the asynchronous push model of information transfer for the event  
52 service. The information may be present in some information server from where the MIH Function in the  
53 station can access it. The definition of the information server and the mechanism to access it are outside the  
54 scope of this standard.  
55  
56  
57

58  
59 The information can be made available via both lower as well as higher layers. Information can be made  
60 available at L2 through both a secure and an insecure port. Information available through insecure port  
61 would typically be less sensitive and would typically allow the mobile terminal or the network to make a  
62 quick handover decision before incurring the overhead of authentication and establishing a secure L2 con-  
63 nection with the network.  
64  
65

1 In certain scenarios L2 information may not be available or sufficient to make intelligent handover decision.  
2 In such cases, higher layer information service is required. The capability of such network information ser-  
3 vice can be obtained via schema access. The structure and definition of a schema can be represented in a  
4 high level language such as XML. However the transport and security of this information are outside the  
5 scope of IEEE 802.21.  
6

7  
8 The Information service also provides access to static information such as neighbor reports. This informa-  
9 tion helps in network discovery. The service may also provide access to dynamic information which may  
10 optimize link layer connectivity with different networks. This could include link layer parameters such as  
11 channel information, MAC addresses, security information, etc. Information about available higher layer  
12 services in a network may also help in more effective handover decision making before the mobile terminal  
13 actually attaches to any particular network.  
14

15  
16 While selecting for an appropriate syntax for information exchange it is desired that:  
17

- 18 1) The information exchange should be done fast
- 19 2) The overhead in exchange of information should be as less as possible
- 20 3) The extraction of the information at the terminal should not include high computational com-  
21 plexity  
22


23  
24  
25 The information provided by Information service conforms to structure and semantics specified within  
26 802.21. The Media Independent Information service specifies a common (or media independent) way of rep-  
27 resenting this information across different technologies by using a standardized format such as XML or  
28 ASN.1  
29

30  
31 MIIS provides the ability to access this information about all heterogeneous networks in a geographical area  
32 from any single L2 network, depending on how the 802.21 MIIS service is implemented. MIIS either relies  
33 on existing access media specific transports and security mechanisms or L3 transport and L3 security mech-  
34 anisms to provide access to the information. How this information is developed and deployed in a given L2  
35 network is outside the scope of the standard. A media independent neighbor graph may be abstracted obtain-  
36 ing the neighbor reports from media specific technology, however, the generation and maintenance of this  
37 media independent neighbor graph is out of scope of this standard. Typically, in a heterogeneous network  
38 composed of multiple media types, it is the handover decision module or higher layer mobility management  
39 will collect information from different media types and assemble a consolidated view to facilitate its inter-  
40 media handover decision.  
41

42  
43  
44 Some networks such as the cellular networks already have an existing means of detecting a list of neighbor-  
45 hood base stations within the vicinity of an area via the broadcast control channel. Other IEEE groups define  
46 similar means and supports clients in detecting a list of neighborhood access points within the vicinity of an  
47 area via either beaconing or via the broadcast of MAC management messages. The Media Independent  
48 Information service (MIIS) provides a unified framework to help the higher layer entities across the hetero-  
49 geneous network environment to facilitate discovery and selection of multiple types of networks existing  
50 within a geographical area. In the larger scope, the macro objective is to help the higher layer mobility pro-  
51 tocol to acquire a global view of the heterogeneous networks to facilitate seamless handover when roaming  
52 across these networks.  
53

## 54 55 56 57 **5.5 MIH Reference Model for Access Networks**

58  
59 The MIH Function provides asynchronous and synchronous services through well defined Service Access  
60 Points for upper layers. The following sections describe the reference model for various access networks  
61 with MIH functionality.  
62  
63  
64  
65

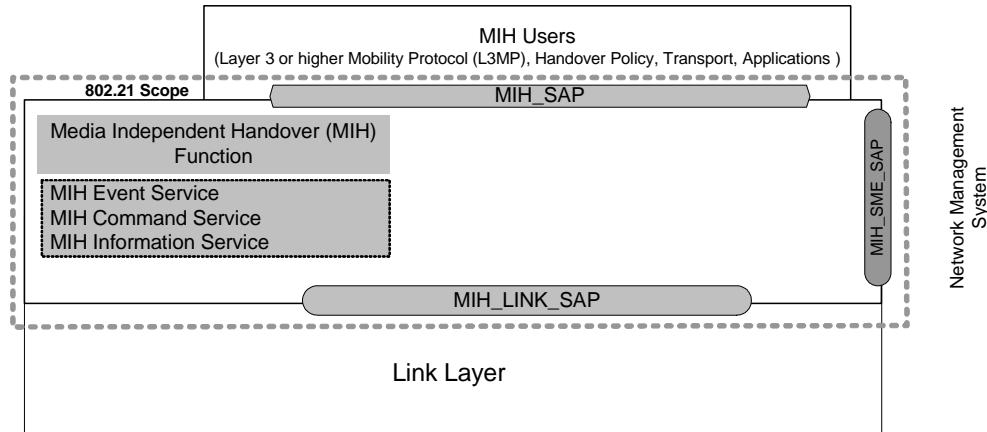

**Figure 4 — General MIH Reference Model and SAPs**

Figure 4 — illustrates the position of MIH Function in different protocol stacks and the interaction of MIH Function with other different elements of the system. All exchanges between the MIH function and other functional entities occur through service primitives, grouped in Service Access Points (SAPs). The media agnostic General MIH Reference Model includes the following SAPs:

- a) **MIH\_SAP**: Media-independent interface of MIH Function with the upper layers of the protocol stack.
- d) **MIH\_LINK\_SAP**: Generic SAP which represents the abstract media-dependent interface of MIH Function with the lower layers of the protocol stacks.
- e) **MIH\_NMS\_SAP**: Media-independent interface of MIH Function with the network management system.

In the media specific reference models, the media-independent SAPs (**MIH\_SAP** and **MIH\_NMS\_SAP**) always maintain the same name and same set of primitives. The media-dependent SAP (**MIH\_LINK\_SAP**), assumes media-specific names and sets of primitives, often reusing names and primitives that already exist in the respective media specific pre-existing lower-layer SAP's. Primitives defined in **MIH\_LINK\_SAP** result in amendments to media specific SAP's due to additional functionality defined for interfacing with MIH Function.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65


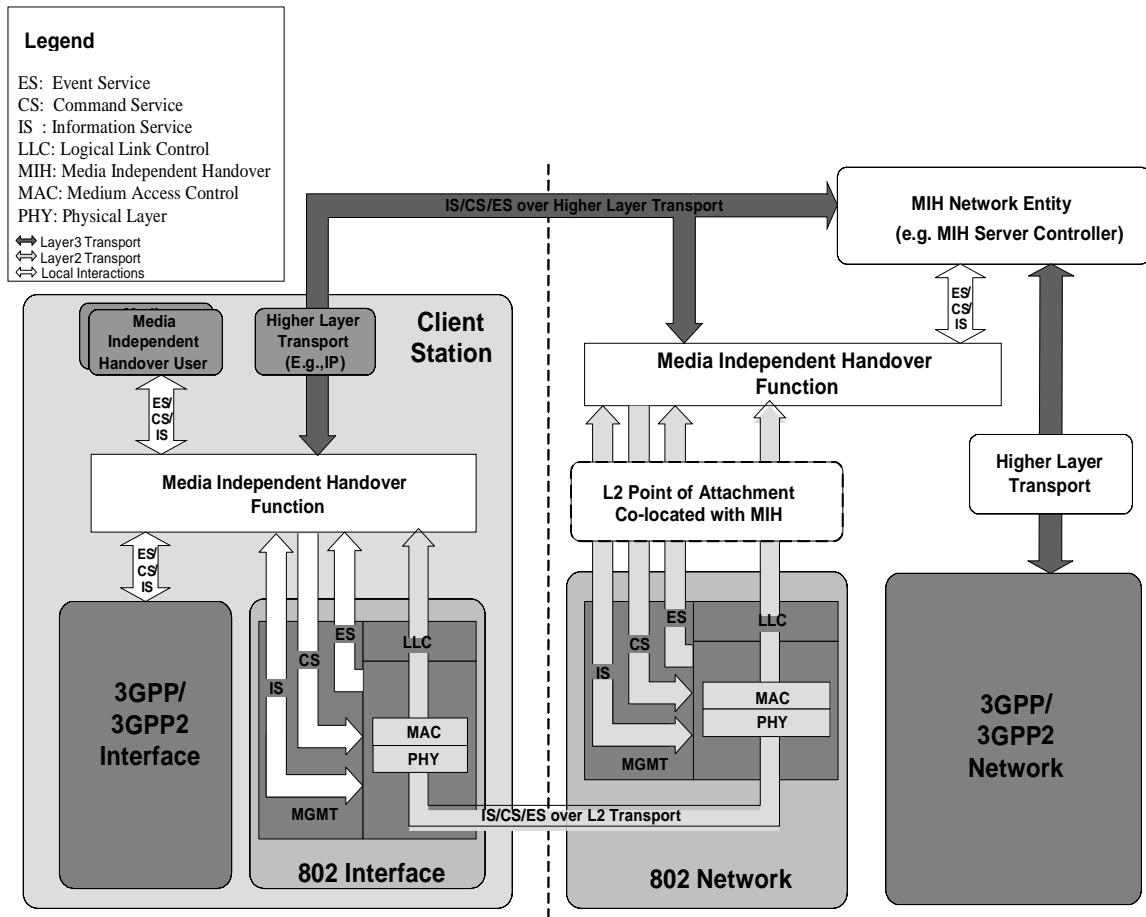


Figure 5 — MIH Reference Model across Different Networks


### 5.5.1 MIH Reference Model for 802.3

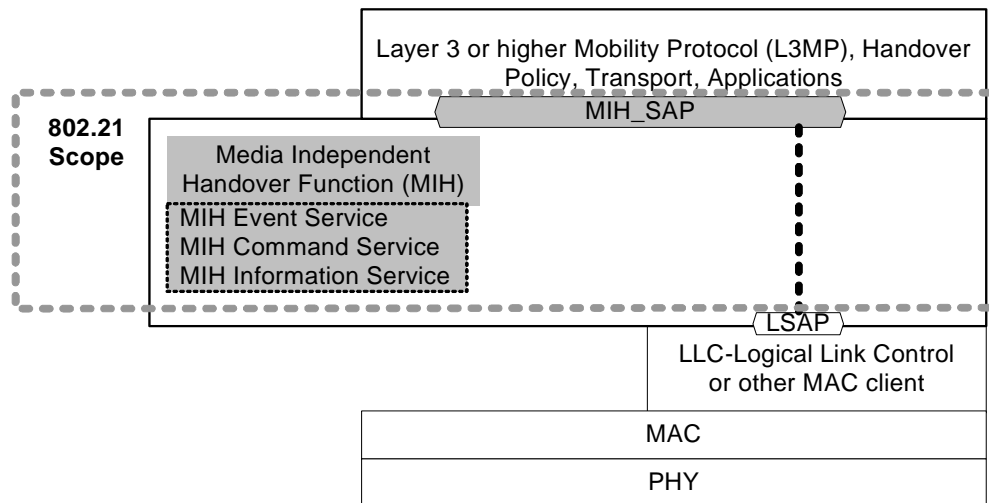

**Figure 6 — MIH Reference Model for 802.3**

The MIH reference model for 802.3 is illustrated above in Figure 6 —. The IEEE 802.21 standard supports the Media Independent Event service, Media Independent Command service and Media Independent Information service. In case of wired ethernet networks the payload of MIH services is supported over the data plane by using existing primitives defined by the LSAP.

## 5.5.2 MIH Reference Model for 802.11

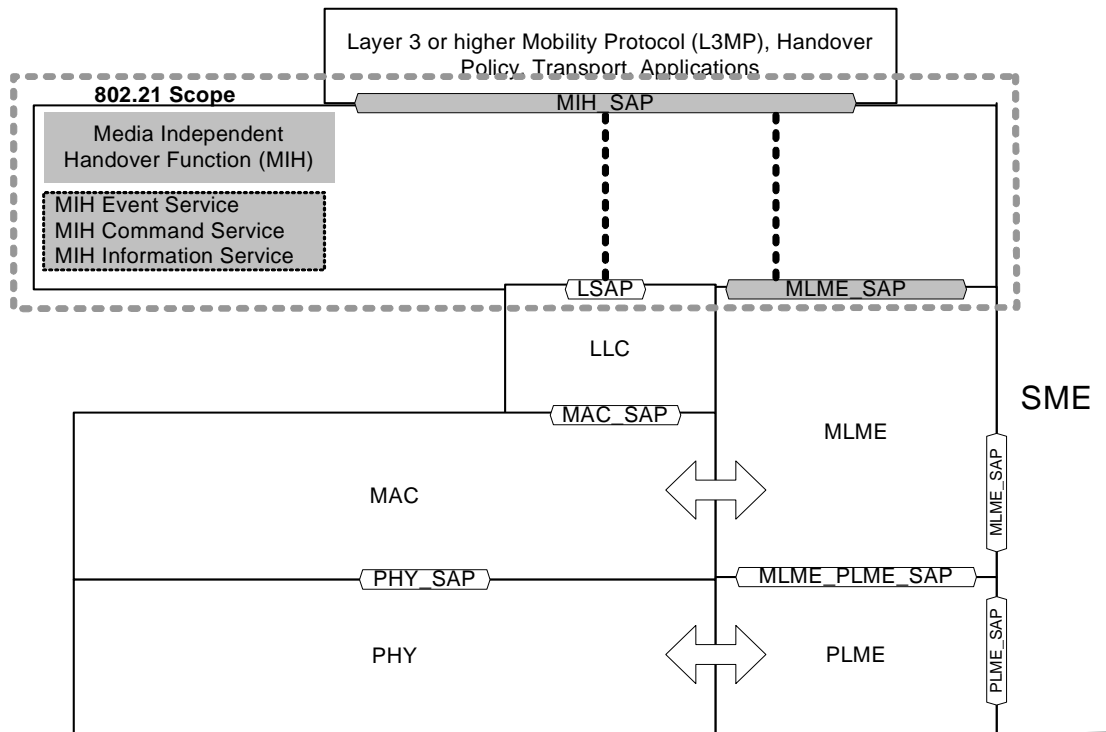

**Figure 7 — MIH Reference Model for 802.11**

Figure 7 — shows the MIH functions for 802.11 stations and network PoA (APs). The LSAP defines the MIH interface to the data plane and can encapsulate MIH payload in data packets. However, since 802.11 does not currently support Class 1 data frames, traffic can be sent over the data plane only when the client has associated with the AP.

The MLME\_SAP specifies the interface between MIH and the management plane (MLME) and allows MIH payload to be encapsulated in management frames (such as action frames). Thus primitives specified by MLME\_SAP can be used to transfer packets before a station has associated with an AP, whereas the LSAP can be used to transfer packets after association has been established with an AP.

The MIH\_SAP specifies the interface of MIH Function with other higher layer entities such as transport, handover policy function and L3 Mobility protocol.

## 5.5.3 MIH Reference Model for 802.16

Figure 8 — shows the MIH function for 802.16 based system. The M\_SAP and C\_SAP service access points are common between the MIH Function and NCMS. These SAPs specify the interaction between MIH Function and the control and management plane entities respectively and they also help in transporting MIH messages across to peer MIH Function entities. The MIH\_SAP specifies the interface of MIH Function with other higher layer entities such as transport, handover policy engine, layer 3 mobility protocol, etc.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

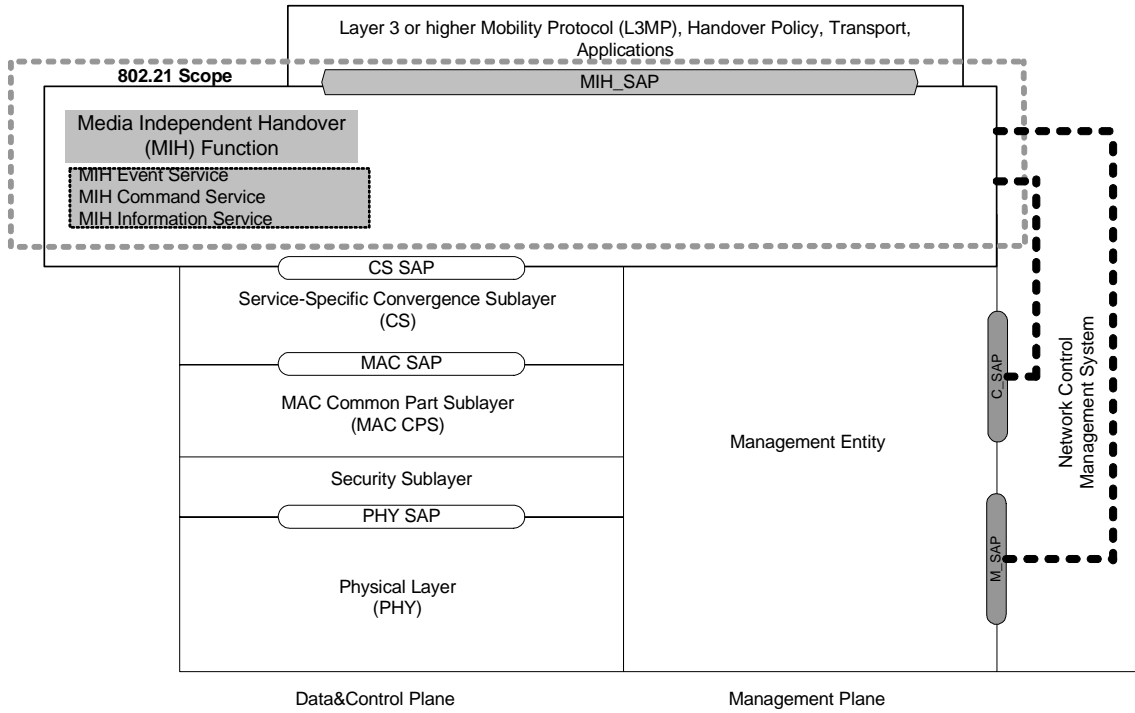


Figure 8 — MIH Reference Model for 802.16

5.5.4 MIH Reference Model for 3GPP


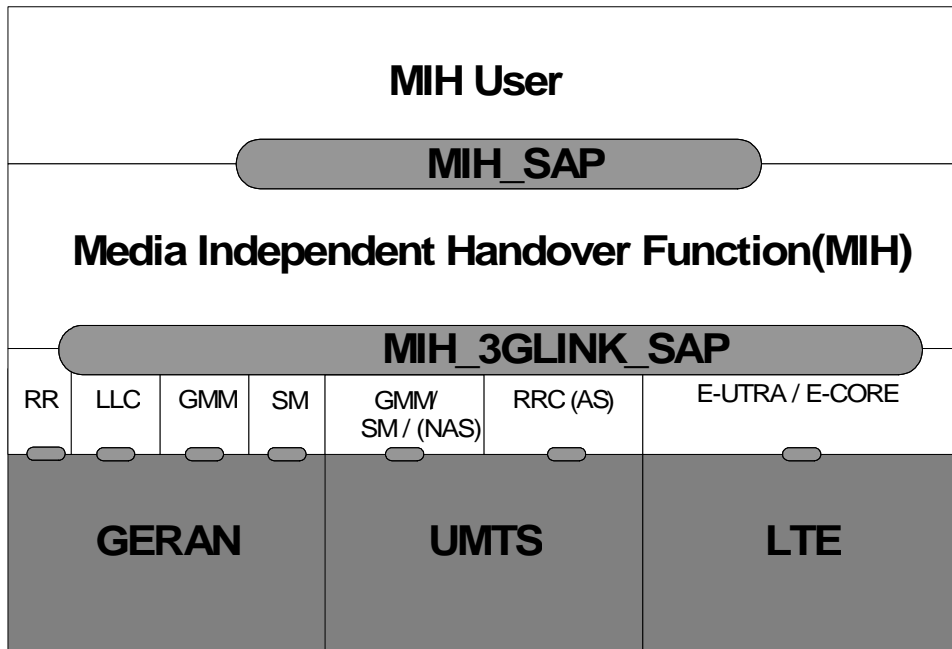


Figure 9 — MIH Reference Model for 3GPP enabled Mobile Stations

Figure 9 — illustrates the interaction between MIH Function and 3GPP based system. The MIH Function services are specified by the MIH\_3GLINK\_SAP. However no new primitives or protocols need to be

1 defined in 3GPP specification for accessing these services. The MIH Function services can be easily  
 2 mapped to existing 3GPP primitives. The architecture placement of the MIH Function shall also be decided  
 3 by the 3GPP standard. The figure above is for illustrative purposes only and shall not constrain implementa-  
 4 tions.  
 5

### 6 7 8 **5.5.5 MIH Reference Model for 3GPP2**

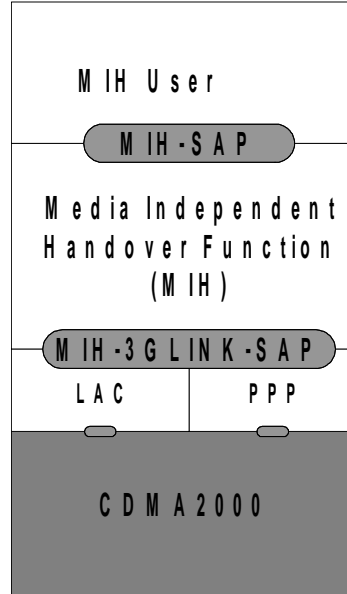

9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 **Figure 10 — MIH Reference Model for 3GPP2 enabled Mobile Stations**

33 Figure 10 — illustrates the interaction between IEEE 802.21 services and 3GPP2 based systems. IEEE  
 34 802.21 services are accessed through the MIH-3GLINK-SAP. However, no new primitives or protocols need  
 35 to be defined within 3GPP2 specification. Instead, a mapping between IEEE 802.21 Link Layer primitives  
 36 and 3GPP2 primitives is established. Primitive information available from a layer such as LAC and PPP can  
 37 be directly used by mapping LAC SAP and PPP SAP primitives to 802.21 service primitives in order to gen-  
 38 erate an event.  
 39

40 This mapping is illustrated in Table 20— which provides an example of how 3GPP and 3GPP2 primitives  
 41 can be mapped to IEEE 802.21 primitives. For example events received through LAC layers SAP such as  
 42 "L2.Condition.Notification" can be mapped and generated through the MIH-3GLINK-SAP as a Link Up,  
 43 Link Down or Link Going Down. Likewise events generated at the PPP SAP within the PPP layer, such as  
 44 LCP-Link-Up or IPCP\_LINK\_OPEN could be mapped and generated through the MIH-3GLINK-SAP as a  
 45 Link Up event.  
 46

47 There will be no direct communication between the PHY and MAC layers with the MIH layer. For the case  
 48 where MIH function is placed in the 3GPP2 network, its PoS may be remote. The architecture placement of  
 49 any MIH function shall be determined by the 3GPP2 SDO in this case.  
 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65

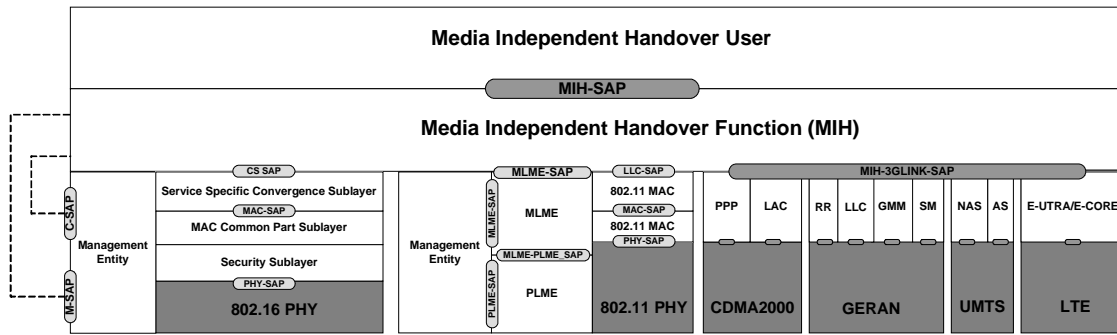



Figure 11 — MIH Reference Model for Mobile Stations with Multiple Protocol Stacks

## 5.6 Service Access Points (SAPs)

The MIH Function exchanges messages with other layers and functional planes using Service Access Points (SAPs). Each SAP consists of a set of service primitives that specify the information to be exchanged and the format of the information exchanges.

The specification of the MIH Function includes the definition of SAPs that are media-independent (i.e., insensitive to the interface types that the mobile terminal can support) and recommendations to define or extend other SAPs that are media-dependent. Media-independent SAPs allow the MIH Function to provide services to the upper layers of the mobility-management protocol stack, the network management plane, and the data bearer plane. The MIH\_SAP and associated primitives provide the interface from MIH Function to the upper layers of the mobility-management stack. Upper layers need to register with MIH Function as users to receive MIH Function generated events and also for link layer events that originate at layers below the MIH Function but can be passed on to upper layers through MIH Function. Upper layers can directly send commands to MIH Function. Similarly MIH Function entities can also send commands to other remote (peer) MIH Function entities. Primitives corresponding to all these services described above are within the scope of MIH\_SAP.

Media-dependent SAPs allow the MIH Function to use services from the lower layers of the mobility-management protocol stack and their management planes. All inputs (including the events) from the lower layers of the mobility-management stack into the MIH Function are provided through existing media-specific SAPs such as MAC SAPs, PHY SAPs, and LLC SAPs. Link Commands generated by the MIH Function to control the PHY and MAC layers during the handover are part of the media specific MAC/PHY SAPs and are already defined elsewhere. Figure 12 — shows the key MIH related SAPs for different networks.

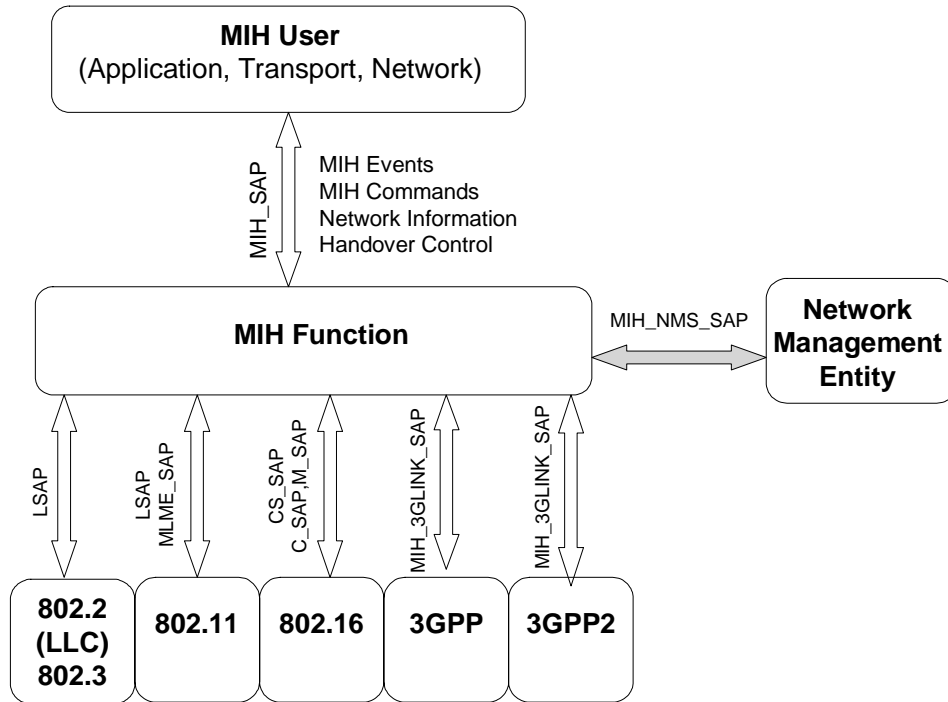

35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

**Figure 12 — Relationship between different MIH SAPs**

### 5.6.1 Media Specific SAPs

#### 5.6.1.1 MLME\_SAP

This SAP defines the interface between the MIH Function and the management plane of 802.11 network. This SAP can be used for sending MIH messages between MIH Function and local link layer entities as well as between peer MIH Function entities. Messages based on management frames can be sent in the unauthenticated state as well.

#### 5.6.1.2 M\_SAP

This SAP defines the interface between the MIH Function and the management plane of 802.16 network.

#### 5.6.1.3 C\_SAP

This SAP defines the interface between the MIH Function and the control plane of 802.16 network.

#### 5.6.1.4 MIH\_3GLINK\_SAP

This SAP defines the interface between the MIH Function and the different protocol elements (such as RRC) of the 3G system. The existing service primitives as defined in 3GPP specification can be directly mapped to MIH Function services, and hence no new primitives need to be defined in case of 3GPP specification.

## 5.6.2 Media Independent SAPs

### 5.6.2.1 MIH\_LINK\_SAP

This SAP defines the generic media independent link layer interface between MIH Function and different link layer technologies. Amendments are suggested for different layer technology specific SAPs based on the definition of this particular SAP.

### 5.6.2.2 MIH\_SAP

This SAP defines the interface between MIH Function and MIH Users such as an upper layer mobility protocol, or a handover function which might reside at higher layer or a higher layer transport entity as well. The definition of this SAP is required to define the scope and functionality of MIH Function.

## 5.6.3 Network Management SAPs

### 5.6.3.1 MIH\_NMS\_SAP

This SAP defines the interface between MIH Function layer and the Network Management Entity or the Network Management System. This SAP defines the interface of MIH Function with the system and is used for configuration and operation of MIH Function in any given system.

## 5.7 Media Independence

### 5.7.1 MIH Protocol

The IEEE 802.21 standard supports the Media Independent Event service, Media Independent Command service and Media Independent Information service. The MIH protocol defines the format of the messages (i.e. MIH packet with header and payload) that are exchanged between remote MIH entities and the transport mechanisms that support the delivery of the messages. The selection of the transport mechanism is dependent on the access technology that connects the MN to the network. The packet payload for these services may be carried over L2 management frames, L2 data frames or other higher layer protocols. Wireless networks such as 802.11 and 802.16 have a management plane and support management frames which could be suitably enhanced for carrying the above payloads. However the wired Ethernet network does not have management plane and can carry the above payloads only in data frames.

The IEEE 802.21 standard should define the packet format and payloads in media independent manner in standard TLV format. Thereafter these packets can be encapsulated in a L2 MIH Protocol using MIH ether-type when the payload needs to be sent over normal data frames as in case of ethernet. In other cases the TLV based messages and payload can be directly encapsulated in media specific management frames.

The IEEE 802.21 standard defines the format of MIH protocol data unit (PDU) header and payload. Standard TLV format provides media-independent representation for the PDU payload contents. The MIH PDUs are encapsulated in data frames with MIH EtherType over 802 links. For 802.11 and 802.16 links extensions of media-specific management frames are recommended for carrying MIH messages. No assumptions are made in this standard regarding the transport of MIH messages over 3GPP and 3GPP2 access links at L2.

## 5.8 Media Dependence

The MIH Function aggregates disparate interfaces with respective media-dependent lower-layer instances (media-dependent service access points) into a single interface with the upper layers (the MIH SAP), making the inter-media differences fully transparent to the upper layers.

1 The MIH Function features media-dependent interfaces with IEEE 802 link-layer technologies (802.2,  
2 802.3, 802.11, and 802.16) and cellular technologies (3GPP and 3GPP2). The MIH Function for the most  
3 part uses existing primitives and functionality provided by different access technology standards. Amend-  
4 ments to existing standards are recommended only when deemed necessary to fulfill the MIH Function  
5 capabilities.  
6

7  
8 The sections below list general amendments recommended to different underlying access technology stan-  
9 dards due to the enhanced heterogeneous handover capability provided by MIH Function.  
10

### 11 **5.8.1 802 Amendments**

12  
13 The MIH Function interacts with the MAC and PHY layers in the IEEE 802 family of standards to monitor  
14 the status of each interface. In general, the IEEE 802 standards provide both control, data plane Service  
15 Access Points (SAPs) and management plane SAPs for the MAC and PHY layers. The MIH Function uti-  
16 lizes these existing SAPs and primitives wherever possible. Extensions of existing IEEE 802 standard prim-  
17 itives are proposed for link layer events and indications and additional information elements are identified  
18 which can help with effective heterogeneous handovers. Mechanisms to discover MIH capability through  
19 broadcast and specific query and response type mechanisms are also proposed.  
20  
21  
22

23  
24 These recommendations should be handled by specific IEEE 802 working groups, e.g. IEEE802.11 and  
25 IEEE802.16. For the better understanding of this specification, some examples are provided as informative  
26 recommendations in the Appendix.  
27

### 28 **5.8.2 3GPP and 3GPP2 Amendments**

29  
30 The amendments suggested in this section emphasize reuse of 3GPP and 3GPP2 functionality. 3GPP system  
31 already broadcast information regarding other Radio Access Technologies. It is recommended extending this  
32 concept so that 802 RATs be also considered along with other existing RATs such as 3GPP2, GERAN and  
33 UTRAN.  
34  
35

36  
37 3GPP services primitives provide access to the underlying layers that support GSM, UMTS and LTE/SAE  
38 connections including session management, mobility management and radio resource management. As  
39 described in table 33a, a direct mapping can be established between these primitives and primitives defined  
40 in this standard, in order to access 3GPP services provides through existing 3GPP SAPs. This does not  
41 require addition of extra primitives although extensions might be useful. Therefore no new 3GPP primitives  
42 are foreseen.  
43  
44

45 The following recommendations are suggested:  
46

- 47 — Include 802.xx Radio Access Technology within the Inter-RAT cell info list information element
- 48 broadcast by 3GPP systems.
- 49 — Extend existing primitives to reflect awareness of 802.xx RATs
- 50
- 51

### 52 **5.8.3 Upper Layer Amendments**

53  
54 Existing mobility mechanism based on different upper layer protocols such as MIP, SIP etc. are based on  
55 layer 3 procedures that are unaware of the operational state of the underlying link that supports the commu-  
56 nication channel. This constraint affects the delivery of service that require low delay and low latency, as  
57 packets are dropped or delayed when the terminal is required to connect to a new network point of attach-  
58 ment.  
59  
60

61  
62 The MIH Function helps to mitigate this problem by providing link-level and other information that can be  
63 used by a mobility management entity to characterize the conditions of both the existing communication link  
64 and potential candidates. Upper layers can interface with the MIH SAP to effectively use these services.  
65

## 6. MIH Function Services

The MIH Function provides Media Independent Event Service, Media Independent Command Service and Media Independent Information Service which facilitate handovers across heterogeneous networks. This section provides a general description of these services.

### 6.1 Media Independent Event Service

#### 6.1.1 Introduction


In general handovers can be initiated either by the mobile terminal or by the network. Events that can initiate handover may originate from MAC, PHY or MIH Function either at the mobile node or at the network point of attachment. This could be due to user or terminal mobility, state change in the environment or because of some management function on part of the network. Thus, the source of these events can be either local or remote. A transport protocol is needed for supporting remote events. Security is another important consideration in such transport protocols.

Multiple higher layer entities may be interested in these events at the same time. Thus these events may need to have multiple destinations. Higher layer entities can register to receive event notifications from a particular event source. The MIH Function can help in dispatching these events to multiple destinations.

These events are treated as discrete events. As such there is no general event state machine. However, in certain cases a particular event may have state information associated with it, such as the *Link\_Going\_Down* event discussed below. In such cases the event may be assigned an *identifier* and other related events may be associated with the corresponding event using this identifier.

From the recipient's perspective these events are mostly "advisory" in nature and not "mandatory". Layer 3 and above entities may also need to deal with reliability and robustness issues associated with these events. Higher layer protocols and other entities may prefer to take a more "defensive" approach when events originate remotely as opposed to when they originate locally.

The Event Service may be broadly divided into two categories, Link Events and MIH Events. Both Link and MIH Events typically traverse from a lower to higher layer. Link Events are defined as events that originate from event source entities below the MIH Function and typically terminate at the MIH Function. Entities generating Link Events include but are not restricted to various IEEE802-defined, 3GPP-defined and 3GPP2-defined interfaces. Within the MIH Function, Link Events may be further propagated, with or without additional processing, to upper layer entities that have registered for the specific event. Events that are propagated by the MIH to the upper layers are defined as MIH Events. This relationship is shown in Figure 13 —.

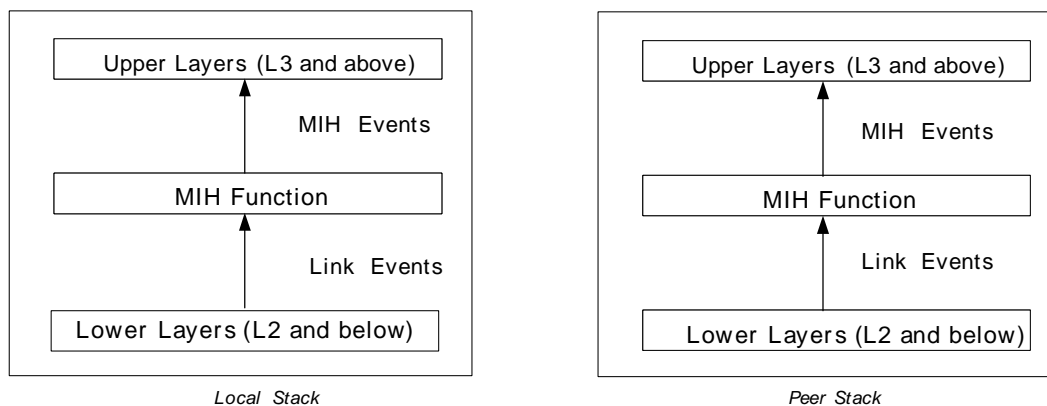

## Figure 13 — Link Events and MIH Events

### 6.1.2 Types of Events

The Media Independent Event Service can support several types of events.

- 1) **MAC and PHY State Change events:** These events correspond to changes in MAC and PHY state. These events correspond to definite changes in state. For example Link Up event is an example of a state change event.
- 2) **Link Parameter events:** These events are due to change in link layer parameters. These events are triggered either synchronously (i.e. on a regular basis) or asynchronously (i.e. when the value of a given link layer parameter crosses a specified threshold). For example, the primitive Link\_Parameter\_Change is a Link Parameter event.
- 3) **Predictive events:** Predictive events express the likelihood of change in properties in future based on past and present conditions. For example, decay in signal strength of WLAN network may indicate loss of link connectivity in near future. Since they attempt to predict the future, they may be incorrect and hence there is a need to retract predictive events. Predictive events may carry predictive information including a *time bound*, specifying the time interval in which the event is expected to occur and a level of *confidence* that the event shall occur in the specified time bound.
- 4) **Link Synchronous events:** These events give indications to upper layers about link layer activities (not related to any MAC/PHY state change) that are relevant in upper layer mobility management decision making. These events give indications of precise timing of L2 handover events that are useful to upper layer mobility management protocols. Link Synchronous events differ from Link State Change events in that they do not necessarily report a link state change that has occurred in the past. These events also differ from Predictive events in that they are deterministic and do not predict any future link state change that is only a possibility. An example of Link Synchronous event is the native link layer L2 handover/switching event that exists in many media types (e.g., Cellular, 802.16e). Native link layer handover/switching decision is deterministic and is made and executed autonomously at link layer, independent of the upper layer mobility management function. Indicating the occurrence of these link layer handover/switching events to upper layers facilitates upper layer mobility management decision making.
- 5) **Link Transmission events:** These events indicate the transmission status (e.g., success or failure) of higher layer PDUs by the link layer. This information can be used by upper layer to improve buffer management for achieving low-loss or no loss handovers. For example, the occurrence of a handover of a mobile node, from one access network to another will result in the reestablishment of a link layer connection to the target access network. When this occurs the upper layer may still have data that had been transmitted over the old link but has not been received by the receiver (e.g. the contents of the outstanding transmit and retransmit MAC ARQ queues in the old access network as well as the mobile node that need to be flushed out during the handover). This data will be lost because of the handover. If low-loss or no loss handover is desired, then upper layers will attempt to retransmit any lost data over the new link. But, before the retransmission can occur, the upper layer needs to first identify the lost data and then re-tag them in their internal buffers, including updating (if necessary) the source/destination IP addresses and re-fragmentation if the MTU of the new link demands so. The upper layer normally has to rely on the use of retransmission timer and end-to-end feedback (such as the ACK in the application or transport layer) to identify lost packets. The latency of this lost data detection based on retransmission time-out and end-to-end feedback often becomes a limiting factor to the handover performance as well as the overall data throughput, especially for time-sensitive applications operating over wireless links with long round-trip delay times. Link

Transmission events can significantly facilitate this process in the upper layer by providing a fast local indication on whether a particular PDU has been successfully transmitted over the link or not. This helps the upper layer to quickly identify lost packets and prepare for selective retransmission of the lost data if needed, without waiting for a retransmission timer expiration or end-to-end feedback.

### 6.1.3 Local and Remote Events

Local events are propagated across different layers within the local stack of a device or a system. All link events are local in nature. Remote events are indications that traverse across the network medium from one MIH Function to a peer MIH Function. MIH events can be local or remote. Remote MIH events originate at remote MIH Function. They traverse through the medium to local MIH Function and are then dispatched to MIH Users that have subscribed for these events within the local stack.

Remote MIH Events traverse from the remote MIH Function to the local MIH Function and then from the local MIH Function to the local upper layer entities as shown in Figure 14 —. This is with the assumption that the local upper layer entities have subscribed for the remote event. Link events that are received by MIH Function can also be sent to a remote entity as MIH event.

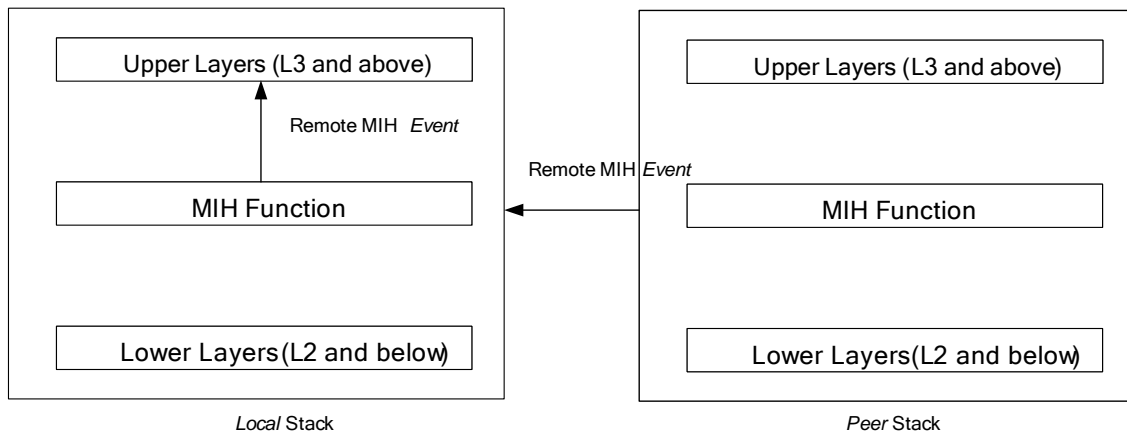


Figure 14 — Remote MIH Events

### 6.1.4 Event Flow Model

Figure 15 — shows the event flow model for link events and MIH events.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

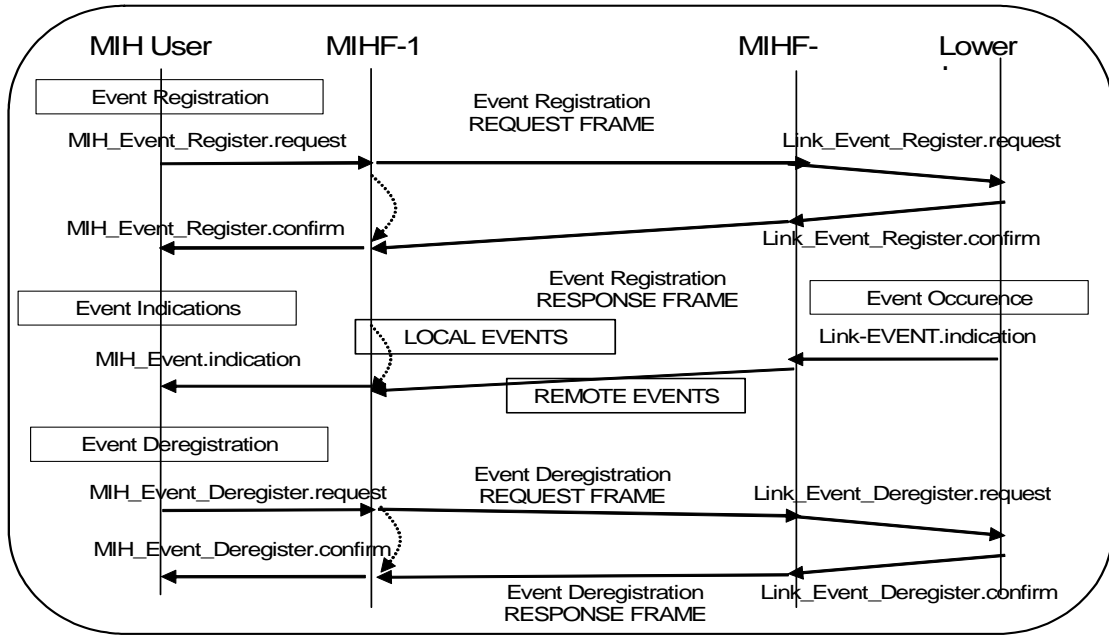


Figure 15 — MIH Events Registration and Flow

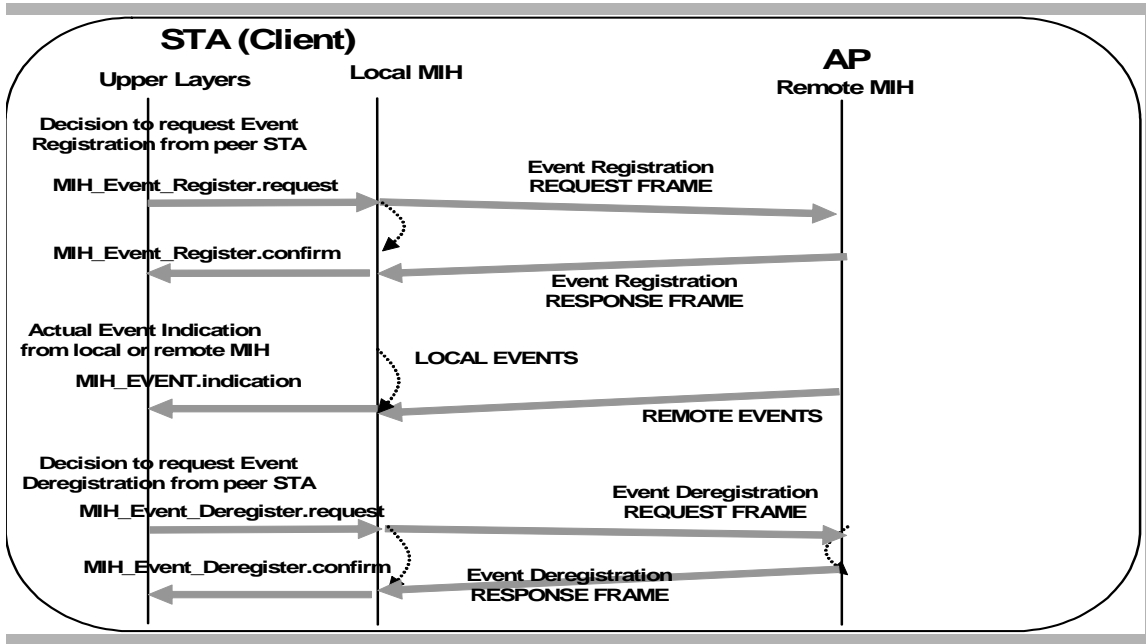


Figure 16 — MIH Events Flow Model

## 6.1.5 Event Registration

Event registration provides a mechanism for upper layer entities to selectively receive events. Registration may be divided into Link Events Registration and MIH Events Registration. Link Events Registration is performed by the MIH Function with the event source entities in order to determine the events that each event source (link) is able to provide. MIH Event Registration is performed by upper layer entities with the MIH Function to select the events to receive. It is possible for upper layer entities to register for all existing events or notifications that are provided by the event source entity even if no additional processing of the event is done by the MIH Function.

### 6.1.5.1 Link Events Registration

It may be possible during initialization that the MIH Function actively searches for pre-existing interfaces, devices and modules that serve as link event sources in the Event service. In addition to the link event source entities that are present during the bootstrapping stage, allowances must be made for devices such as hot-plugged interfaces or an external module. The exact description and implementation of such mechanisms are out of scope of the standard. The MIH Function may then register individually with each of these link layers based on user preferences.

### 6.1.5.2 MIH Events Registration

MIH Users that need to receive event notifications must register themselves with the MIH Function. After registration, the MIH Users may specify a list of events for which they wish to receive notifications from the MIH Function. MIH Users may specify additional parameters during the registration process in order to control the behaviour of the Event Service. Examples of these additional parameters include threshold values, request to receive events as a bundle and so forth. The description of the exact mechanism by which the MIH Function achieve this is outside the scope of the standard. MIH Users may also query on the availability of events from the MIH Function without prior registration. This query may have additional parameters. An example would be a query to retrieve a list of all events for IEEE802.11 defined interfaces only.

## 6.1.6 Primitives for Events

The generic model of Event Service primitives specifies the format of the events that are passed from the link layer to the MIH Function and also from the MIH Function to the upper layer entity. The Event primitive is defined as follows:

- EventXX. indication (EventInformationSet) where,
- EventInformationSet: is an extensible parameter that may contain implementation specific information and may be different across different events. EventInformationSet completely describes the event that occurred.

Event notifications do not receive a response.

## 6.1.7 Link Events

The following set of link layer events are defined.

**Table 2—Link Events**

No	Link Event Type	Link Event Name	Description
1	State Change	Link Up	L2 connection is established and link is available for use

**Table 2—Link Events**

2	State Change	Link Down	L2 connection is broken and link is not available for use
3	Predictive	Link Going Down	Link conditions are degrading & connection loss is imminent
4	State Change	Link Detected	New link has been detected
5	Link Parameters	Link Parameters Change	Link parameters have crossed specified threshold
6	Administrative	Link Event Rollback	Previous link event needs to be rolled back
7	Link Transmission	Link SDU Transmit Status	Indicate transmission status of all PDU segments
8	Link Synchronous	Link Handover Imminent	L2 handover is imminent based on changes in link conditions
9	Link Synchronous	Link Handover Complete	L2 link handover to a new PoA has been completed

**6.1.8 MIH Events**

The following set of MIH events are defined.

**Table 3—MIH Events**

No	MIH Event Type	MIH Event Name	(L)ocal (R)emote	Remote Direction	Description
1	State Change	MIH Link Up	L, R	Client -> Network Network -> Network	L2 connection is established and link is available for use
2	State Change	MIH Link Down	L, R	Client -> Network Network -> Network	L2 connection is broken and link is not available for use
3	Predictive	MIH Link Going Down	L, R	Client -> Network Network -> Network Network -> Client	Link conditions are degrading & connection loss is imminent
4	State Change	MIH Link Detected	L, R	Client -> Network Network -> Network	New link has been detected
5	Link Parameters	MIH Link Parameters Report	L, R	Client -> Network Network -> Network Network -> Client	Link parameters have crossed specified threshold and need to be reported
6	Administrative	MIH Link Event Rollback	L, R	Client -> Network Network -> Network Network -> Client	Previous link event needs to be rolled back
7	Link Transmission	MIH Link SDU Transmit Status	L	N/A	Indicate transmission status of all PDU segments

**Table 3—MIH Events**

8	Link Synchronous	MIH Link Handover Imminent	L, R	Client -> Network Network -> Network Network -> Client	L2 handover is imminent based on changes in link conditions
9	Link Synchronous	MIH Link Handover Complete	L, R	Client -> Network Network -> Network Network -> Client	L2 link handover to a new PoA has been completed

## 6.2 Media Independent Command Service

### 6.2.1 Introduction

Media Independent Command Service refers to the commands sent from the higher layers to the lower layers in the reference model. Upper layers and other MIH users may utilize command services to determine the status of links and/or control the multi-mode device for optimal performance. Command services may also enable MIH users to facilitate optimal handover policies. For example, the network may initiate and control handovers to balance the load of two different access networks.

The link status varies with time and terminal mobility. Information provided by MICS is dynamic information comprising of link parameters such as signal strength, link speed, etc., where as information provided by MIIS is less dynamic or static in nature and is comprised of parameters such as network operators, higher layer service information, etc. MICS and MIIS Information could be used in combination by the terminal/network to facilitate the handover.

A number of commands have been added to allow the upper layers to configure, control, and get information from the lower layers. A set of command services that are provided by the L2 data link (MAC, functions such as MAC, Radio Resource Management etc. depending upon the L2 access link technology) and PHY should be defined in this specification.

The commands are classified into two categories: MIH Commands and Link Commands.

### 6.2.2 Primitives for Commands

The generic model of Command Service primitives specifies the format of commands that are passed from the MIH Function to the link layer and also from the upper layer entity to the MIH Function. The Command Service primitives are defined as follows.

CommandXX. request (SourceIdentifier, CommandInformationSet) where,

- SourceIdentifier: is used to identify the command source entity where the command originated
- CommandInformationSet: is an extensible parameter that may contain implementation specific information and may be different across different events. CommandInformationSet completely describes the command that is issued.

CommandXX. response (SourceIdentifier, CommandResultSet) where,

- SourceIdentifier: is used to identify the source entity where the response originated
- CommandResultSet: is an extensible parameter that may contain the result of the request and may be different across different commands.

### 6.2.3 MIH Commands

MIH Command includes the commands from upper layer to MIH (e.g. upper layer mobility protocol to MIH, or policy engine to MIH, etc.).

MIH Command may be local or remote. Local MIH Commands are issued by Upper Layers to MIH function in the local stack. Remote Command are issued by Upper Layers to MIH function in the peer stack. Figure 17 — and Figure 18 — illustrate the differences between local and remote MIH Commands.

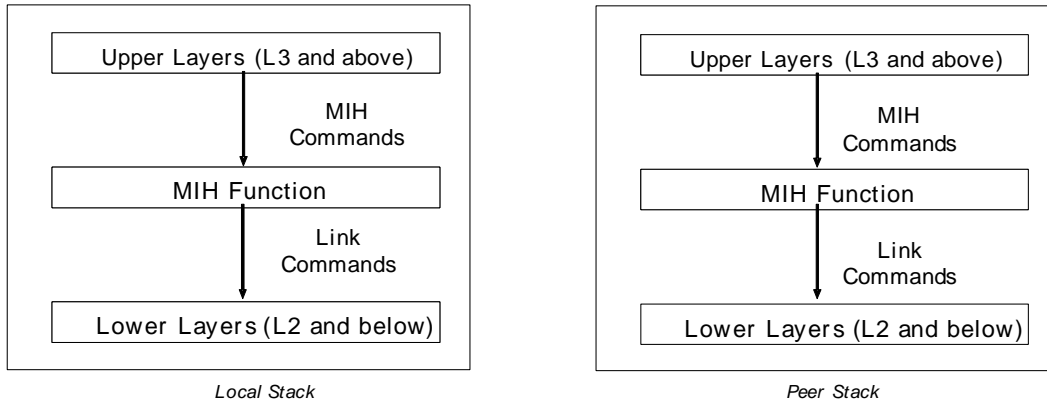


Figure 17 — Local MIH Commands

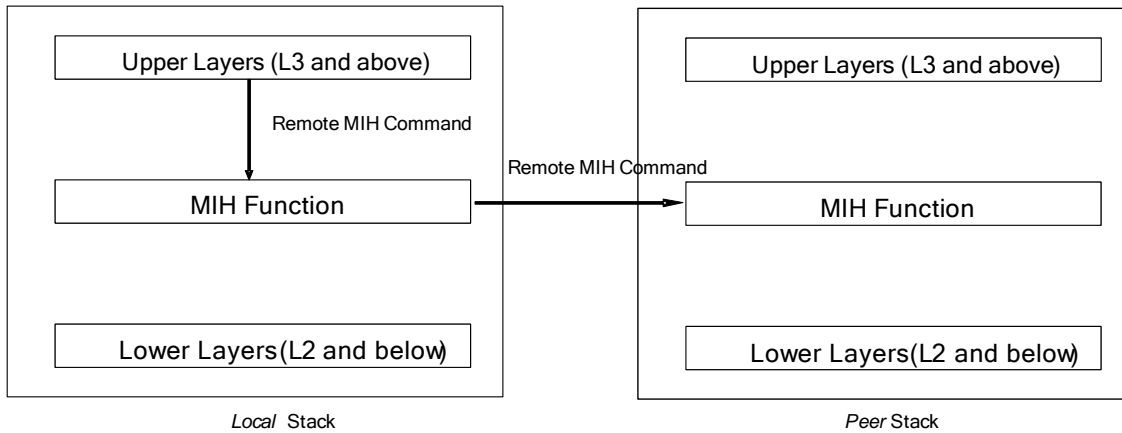


Figure 18 — Remote MIH Command

### 6.2.4 Link Commands

Link Command originate from MIH Function and are directed to lower layers (e.g. MIH Function to MAC, or MIH Function to PHY). These commands mainly control the behavior of lower layer entities. Link Commands are local only. Link Commands are issued by MIH Function to lower layers in the local stack. Whenever applicable the IEEE 802.21 specification shall use existing media specific link commands for interaction with specific access networks. New link commands if required, shall be defined as recommendations to media specific technology standards. It is to be noted that although Link Commands originate from the MIH Function, these commands are executed on behalf of MIH-User.

### 6.2.5 Command Service Flow Model

Figure 19 — and Figure 20 — show the flow for local and remote commands respectively.

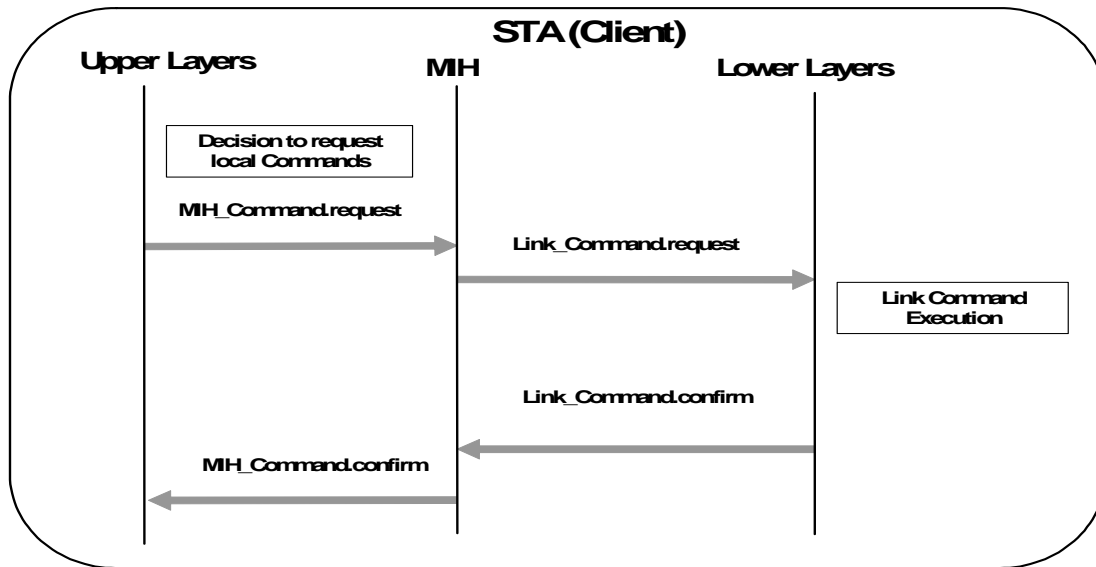


Figure 19 — Local Command Service Flow

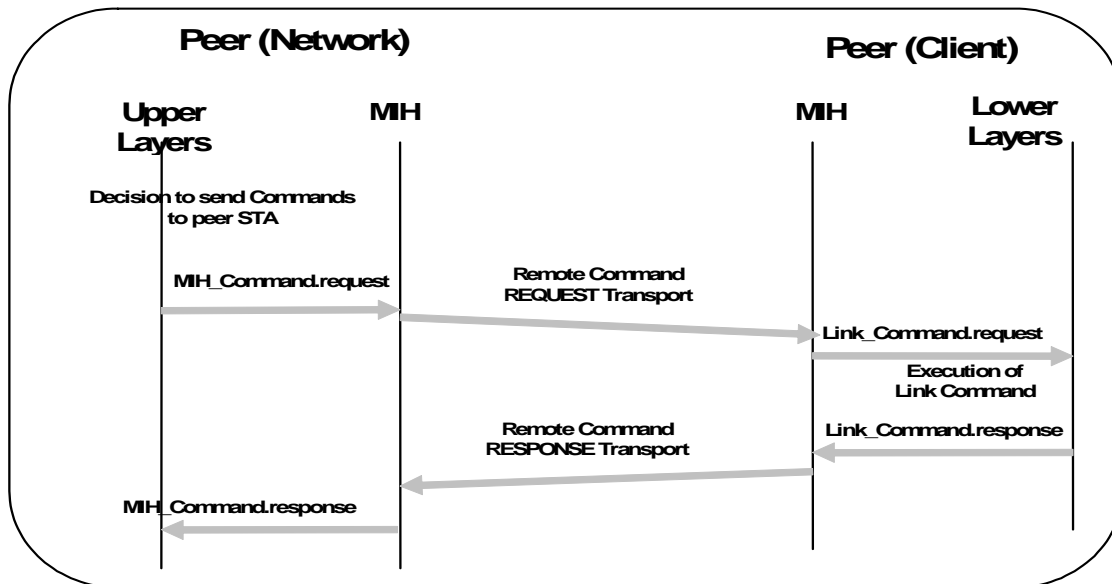


Figure 20 — Remote Command Service Flow

53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

The use cases and handover scenarios for the commands defined in this section are provided in Appendix. Remote commands may be transported over network layer protocols or link layer protocols.

## 6.2.6 Command List

### 6.2.6.1 MIH Commands

The following set of MIH Commands are defined.

**Table 4—MIH Commands**

No	MIH Command	(L)ocal, (R)emote	Remote Direction	Comments
1	MIH Get Status	L, R	Network -> Client	Get the status of links
2	MIH Switch	L, R	Network -> Client	Switch the links as specified
3	MIH Configure	L, R	Network -> Client	Configure a link
4	MIH Configure Link Thresholds	L,R	Network-> Client	Configures thresholds for link events
5	MIH Scan	L, R	Network -> Client	Scan a link
6	MIH Handover Initiate	L, R	Client -> Network Network -> Client	Network initiates handover and sends a list of suggested networks and associated Points of Attachment
7	MIH Handover Prepare	L, R	Network -> Network	This command is sent by current MIHF entity to target MIHF entity to allow for resource query and handover preparation.
8	MIH Handover Commit	L, R	Client -> Network, Network -> Client	In this case the client commits to do the handover and sends its choice of selected network and associated PoA.
9	MIH Handover Complete	L, R	Client -> Network, Network -> Network	Notification from new serving MIHF to previous serving MIHF indicating handover completion, and any pending packets may now be forwarded to the new MIHF.
10	MIH Network Address Information	L, R	Network -> Network	Sent from current serving MIHF entity to target MIHF entity to obtain reconfigured network address on target network for the client.

### 6.2.6.2 Link Commands

The following set of Link Commands are defined.

**Table 5—Link Commands**

No	Link Command	Comments
1	Link Configure Thresholds	Configure the thresholds for various link layer events such as Link Going Down


## 6.3 Media Independent Information Service

### 6.3.1 Introduction

Media Independent Information Service (MIIS) provides a framework by which a MIH Function both in the mobile node and in the network can discover and obtain network information within a geographical area to facilitate handovers. The objective is to acquire a global view of all the heterogeneous networks in the area to facilitate seamless handovers when roaming across these networks.

Media Independent Information Service includes support for various Information Elements (IEs). Information Elements provide information that is essential for a handover module to make intelligent handover decision. Figure 21 — gives a high level description of scenarios that distinguish between two different types of mobility.

- **Horizontal handovers:** A horizontal handover is performed by switching between different points of attachment of the same access network. For example, switching between different APs within the 802.11 network (e.g. Inter ESS or inter subnet).
- **Vertical handovers:** A vertical handover is a handover from one access network to another access network. For example switching between different PoAs across heterogeneous technologies (e.g. from WLAN to GPRS).

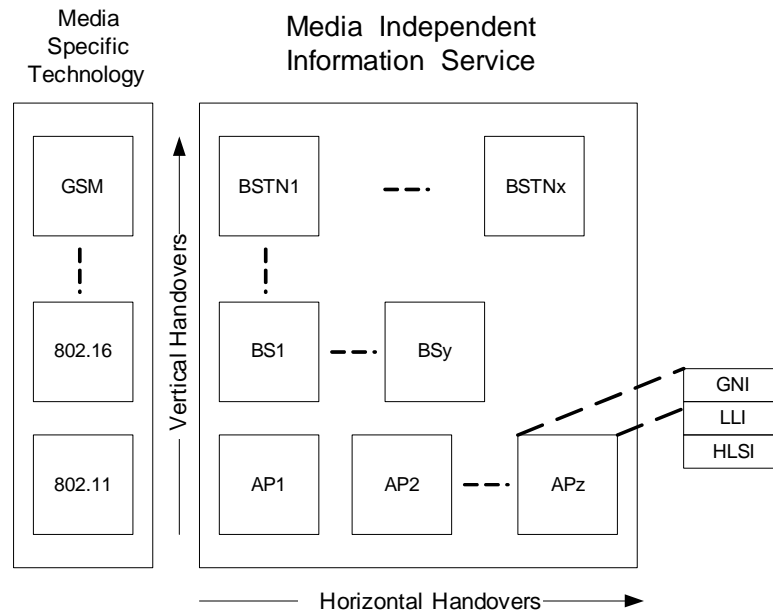

**Figure 21 — Horizontal and Vertical Handovers**

Depending on the type of mobility support for different types of information elements may be necessary for performing handovers. For example in case of horizontal handovers across different PoAs of the same access network information available from lower link layers of access network may be sufficient. In such cases information elements like intra-technology neighbor reports and other link layer information required during handovers is directly available from the access network. In such cases the availability of higher layer services offered by the network typically does not change appreciably across different network point of attachments. On the other hand during vertical handovers the terminal may move across different access networks. In such cases there is a need to select appropriate PoA in the new network based on both optimum

1 link layer connectivity as well as availability of appropriate higher layer services to permit service and ses-  
2 sion continuity for active user applications.  
3

4 Media Independent Information Service (MIIS) provides the capability for obtaining the necessary informa-  
5 tion for handovers. This includes information about lower layers such as neighbor maps and other link layer  
6 parameters as well as information about available higher layer services such as access to internet connecti-  
7 vity, availability of VPN services, etc. The set of different higher layer services provided by the MIIS may  
8 constantly evolve. At the same time the list of access networks that are supported by MIIS may also evolve.  
9 As such there is a need for flexibility and extensibility in the way the MIIS provides support for different  
10 information elements. Towards this end the MIIS defines a schema. The schema helps a client of MIIS to  
11 discover the capabilities of MIIS and also discover the entire set of different access networks and IEs sup-  
12 ported by a particular implementation. Schema representation also allows the terminal to query the informa-  
13 tion in a more flexible and efficient manner. As part of defining this schema the MIIS can also identify a set  
14 of basic information elements that can define the core functionality of different implementations of MIIS.  
15 Other information elements as they are added can become part of the more extended set of MIIS capabilities.  
16  
17  
18  
19

20 MIIS provides information about different access networks such as 802 networks, 3GPP networks and  
21 3GPP2 networks. The MIIS also allows this collective information to be accessed from any single network.  
22 Thus for example using a 802.11 access network it may be possible to get information not only about all  
23 other 802 networks in a particular region but also that of 3GPP and 3GPP2 networks as well. Similarly using  
24 a 3GPP2 radio, it may be possible to get access to information about all 802 and 3GPP networks in a given  
25 region. This capability allows a terminal device to use its currently active access network and scan for other  
26 available access networks in a geographical region. Thus a terminal device is freed from the burden of pow-  
27 ering up each of its individual radios and establishing network connectivity for the purpose of accessing het-  
28 erogeneous network information. MIIS enables this functionality across all available access networks by  
29 providing uniform way to retrieve heterogeneous network information in any geographical area.  
30  
31  
32

### 33 **6.3.2 Information Service Elements**

34 The main goal behind the Information service is to allow mobile terminals and network entities to discover  
35 information that can help/influence them in selection of appropriate networks during handovers. This infor-  
36 mation is intended to be primarily used by a policy engine type entity that can make effective handover deci-  
37 sions based on this information. This information service is expected to provide mostly static type of  
38 information. Other dynamic information about different access networks such as current available resource  
39 levels, state parameters, dynamic statistics etc. should be obtained directly from the respective access net-  
40 works. Some of the key motivations behind the Information Service are as follows:  
41  
42  
43  
44

- 45 1) Provide information about different available access networks in a geographical area. Further  
46 this information could be retrieved using any wireless network. Thus in essence information  
47 about a nearby WiFi hotspot could be obtained by using a GSM or other cellular network
- 48 2) Provide static link layer information parameters that could help the mobile devices in selecting  
49 the appropriate access network. For example knowledge of whether security and QoS are sup-  
50 ported on a particular access network may influence the decision to select such an access net-  
51 work during handovers.
- 52 3) The link layer information comprising of neighbor reports and information about capabilities of  
53 different PoAs could also aid in configuring the radios optimally (to the extent possible) for  
54 connecting to available/selected access networks. For example knowing about supported chan-  
55 nels by different PoAs may help in configuring the channels optimally as opposed to scanning,  
56 beaconing etc. and then finding out this information. However for most part dynamic link layer  
57 parameters have to be obtained or selected based on direct interaction with the access networks  
58 and the Information Service may not be able to help much in that regard.
- 59 4) Provide an indication of higher layer services supported by different access networks and other  
60 relevant information that may aid in making handover decisions. Such information may not be  
61 available (or could not be made available) directly from MAC/PHY layers of specific access  
62  
63  
64  
65

networks, but could be provided as part of the Information service. For example in certain cases classification of different networks into categories such as public, enterprise, home, others etc. may influence the decision to handover. Other information here may be more vendor/network specific in nature and could be specified in that form.

The information service elements can be classified into three groups:

- 1) General Access Network Information: These information elements give a general overview of the different networks providing coverage within an area such as list of available networks and their associated operators, roaming agreements between different operators, cost of connecting to the network and network security and quality of security capabilities.
- 2) Information about Points of Attachment: These information elements provide information about different PoAs for each of the available access networks. These IEs include PoA addressing information, PoA location, data rates supported, the type of PHY and MAC layers and any channel parameters to optimize link layer connectivity. This may also include higher layer services and individual capabilities of different PoAs.
- 3) Other Information: This could be vendor specific information and vendor specific IEs.

**Table 6—Information Elements**

No	Name of Information Element	Description	Representation	Length (octets)
General Information Elements				
1.1	TYPE_IE_LIST_OF_NETWORKS	List of Neighboring Access Networks.  Link types of the networks that are available in a given geographical area	For example, RADIUS NAS-Port-Type attribute value which is a unique identifier defined in <a href="http://www.iana.org/assignments/radius-types">http://www.iana.org/assignments/radius-types</a> , e.g., 15: Ethernet 18: Wireless - Other 19: Wireless - IEEE 802.11 22: Wireless - CDMA2000 23: Wireless - UMTS 24: Wireless - 1X-EV etc.	4
1.2	TYPE_IE_NUMBER_OF_OPERATORS	Number of distinct operators for each available link type. There maybe multiple operators for each link type.	If networks of same link type have different operators then they are classified as different networks. Thus there may be three different 802.11 networks in an area, each supported by a different operator	4
1.3	TYPE_IE_LIST_OF_OPERATORS	Network Operator List for each type of link.  This includes the list of network operators for each of the access networks.		Variable
Access Network specific information For each (Link Type and Operator) combination following information may be provided				

**Table 6—Information Elements**

No	Name of Information Element	Description	Representation	Length (octets)
2.1	TYPE_IE_NUMB ER_POA	Number of Point of Attachments (PoA) for a specific Access Network in the Neighborhood. Number of APs, BSs etc. in the vicinity of client device	This can be gotten from Neighbor Reports	4
2.2	TYPE_IE_OPER ATOR_IDENTIFI ER	Network Operator  The operator of a network.	A combination of RADIUS Operator- Namespace and Operator-Name attributes defined in draft-ietf-geopriv- radius-lo-04.txt.  Operator Name space: { GSM, CDMA, REALM,.. } Operator Name:	Variable
2.3	TYPE_IE_ROAM ING_PARTNERS	Roaming Partners.  Operators with which the current network operator has direct roaming agreements.	Each operator has the same structure as Network Operator information element.	Variable
2.4	TYPE_IE_COST	Cost  Indication of cost for service or network usage	Should include the following: Value: (Actual cost denomination) Unit: (Country/Currency code) - enumerated Time Duration: Duration for which cost is applicable - enumerated Service Info: (whether unrestricted or restricted)	Variable
2.5	TYPE_IE_NETW ORK_SECURITY	Security characteristics of the link layer.	Authentication Methods, Cipher Suites The security capabilities type can be defined by media-specific MIB	Variable
2.6	TYPE_IE_QOS	QoS (Quality of Service) characteristics of the link layer	The QoS classes and traffic type can be defined by media-specific MIB	Variable
PoA specific information For each PoA of each (Link Type + Operator) following IEs may be provided				
3.1	TYPE_IE_POA_ ADDRESS	MAC Address of PoA	Link-layer address of PoA (Usually the MAC Address of the PoA)	Variable

Table 6—Information Elements

No	Name of Information Element	Description	Representation	Length (octets)
3.2	TYPE_IE_POA_LOCATION	Location of PoA  Geographical location of a given PoA. Multiple location types are supported including coordinate-based location information and civic address	Two types of location information are supported in draft-ietf-geopriv-radius-lo-04.txt, i.e., geospatial location information and civic location information.  Geospatial location information consists of: - Latitude Resolution - Latitude - Longitude Resolution - Longitude - Altitude Type {Floor, Meters} - Altitude Resolution - Altitude - Map Datum (Co-ordinate reference system)  Civic location information consists of: - Country Code - Civic address elements  Method of obtaining location information - GPS - Manual	Variable
3.3	TYPE_IE_POA_DATA_RATE	Data Rate The minimum and maximum value of data rate supported by the link layer of a given PoA	A data rate is represented as a 32-bit unsigned integer in unit of Kbps.	4 (32-bit unsigned integer)
3.4	TYPE_IE_POA_PHY_TYPE	The media PHY type.	Classification of the PHY layer	Variable
3.5	TYPE_IE_POA_MAC_TYPE	The media MAC type.	Classification of the MAC layer	Variable
3.6	TYPE_IE_POA_CHANNEL_RANGE	Channel Range/Parameters Spectrum range supported by the Channel for that PoA	(Low, High range) MHz	4,4 (32-bit unsigned integer)
Higher layer services/information per PoA				
4.1	TYPE_IE_POA_SUBNET_INFORMATION	Information about subnets supported by a typical PoA	(IPv4/IPv6) Each PoA may be assigned to multiple subnets	Variable

**Table 6—Information Elements**

No	Name of Information Element	Description	Representation	Length (octets)
4.2	TYPE_IE_POA_CAPABILITIES	Bitmap of PoA capabilities	Security Available Y/N QoS Available Y/N Internet Access Available Y/N IP Version 4 supported Y/N IP Version 6 supported Y/N Emergency Services available Y/N Others:	
Other Information Elements				
5.1	Vendor Specific IEs	Vendor Specific Services	These can be defined by individual vendors.	

The MIH Function in a network entity can extract the Information Elements either from media specific broadcast information or by sending a specific request/response primitive. Before sending a request or response frame, the MIH Function should have the knowledge that the network supports the IEEE 802.21 specification. The MIH Function in MN may request the network side MIH Function for such information. It is important to note that before a MN is authenticated to the PoA and ready to transfer data, it should be able to obtain all the information elements listed above. These information elements may be used by the handover policy function to determine the appropriate PoA to attach.

### 6.3.3 Definition of Information Element Name Space

The 802.21 Information Elements can be assigned identifiers (IDs) as follows. Each Information Element ID can be a 32 bit value.

**Table 7—Information Elements Name Space**

Range	Description	Comments
0x00000000	Reserved	
0x00000001 - 0x1FFFFFFF	Reserved for 802.21	Core 802.21 specific IEs
0x2    (16 bit OUI)    (14 bit ID)	Vendor specific IE	IEs defined on a per vendor basis. 16 bit OUI: Vendor ID 14 bit ID:
0x30    (8 bit Working Group identifier)    (16 bit WG specific ID of IEs)	Reserved for different Working Groups.	Can be reserved for other different SDOs and 802 WGs such as 802.11, 802.16 etc., if they want to define anything specific for heterogeneous handovers
0x31    (24 bit ID)	Reserved for IETF.	Can be reserved for IETF protocols and other higher layer IEs.

Table 7—Information Elements Name Space

Range	Description	Comments
0x32    ( 24 bits)	Reserved for playpen area.	Can be used in development and testing. Should not be used in released products. Avoids collision during development.
0x33000000 – 0xFFFFFFFF	Reserved	For future use

### 6.3.4 TLV Representation of Information Elements

The Information Elements can be represented in Type Length Value form as follows.

Type (4 octets)	Length (Variable octets)	Value (Variable octets)
Represents the type or ID of the Information Element	Length of the Value field of the IE	The value of the IE

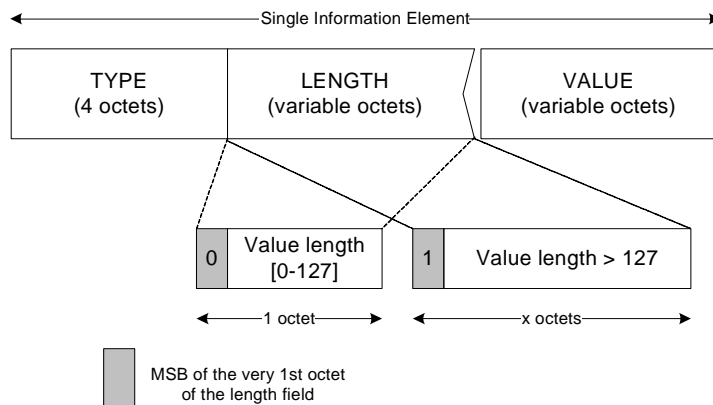


Figure 22 — TLV Representation of Information Elements

The Length field can be interpreted as follows.

Case 1: If the number of octets occupied by the value field is less than 128, the size of the length field is always 1 octet and the MSB of the octet is set to the value '0'.

Case 2: If the number of octets occupied by the value field is greater than 127, then the length field is always greater than 1 octet. The MSB of the first octet of the length field is set to the value '1' and the remaining 7 bits of the first octet indicate the number of octets that are appended further. The number represented by the 2nd octet of the length field indicates the total size of the value field.

### 6.3.4.1 General Information Information Elements

#### 6.3.4.1.1 List of Neighboring Access Networks

Type	Description	Length	Value
TYPE_IE_LIST_OF_NETWORKS	List of Neighboring Access Networks	Variable	List of different link types. 4 octets for each link

#### 6.3.4.1.2 Number of Operators for each Access Network

Type	Description	Length	Value
TYPE_IE_NUMBER_OF_OPERATORS	Number of operators for each link type	2 octets	Number of different operators for each link type

#### 6.3.4.1.3 List of Operators for each Access Network

Type	Description	Length	Value
TYPE_IE_LIST_OF_OPERATORS	List of Network Operators for a specific link	Variable	List of different operators for each link. The value field contains zero or more Operator Identifier TLVs.

#### 6.3.4.1.4 Operator Identifier

Type	Description	Length	Value
TYPE_IE_OPERATOR_IDENTIFIER	An identifier of an operator	Variable	A combination of operator namespace and operator name is encoded in this field. The encoding format is defined as table below.

**Table 8—Operator Identifier Encoding**

Syntax	Length (octets)	Note
L_OperatorNamespace	1	Length of <b>OperatorNamespace</b> in octets
L_OperatorName	1	Length of <b>OperatorName</b> in octets
OperatorNamespace	Variable	A value of RADIUS Operator-Namespace attribute defined in draft-ietf-geopriv-radius-lo-04.txt: GSM : GSM Association TADIG WG CDMA : IMSI Oversight Council REALM: IANA or delegate
OperatorName	Variable	A value of RADIUS Operator-Name attribute defined in draft-ietf-geopriv-radius-lo-04.txt. The value is a non-NULL terminated string whose Length MUST NOT exceeds 253 bytes. The value uniquely identifies the operator name within the scope of the operator namespace.

### 6.3.4.2 Access Network specific information Elements

#### 6.3.4.2.1 Number of PoAs (for Access network + Operator)

Type	Description	Length	Value
TYPE_IE_NUMBER_OF_POA	Number of PoAs	2 octets	Number of PoAs for a specific link type + Operator combination

#### 6.3.4.2.2 Roaming Partners (for Access Network + Operator)

Type	Description	Length	Value
TYPE_IE_ROAMING_PARTNERS	Roaming partners	Variable	List of different operators. The value field contains zero or more Operator Identifier TLVs.

#### 6.3.4.2.3 Cost (for Access Network + Operator)

Type	Description	Length	Value
TYPE_IE_COST	Cost	Variable	Cost of accessing the network.

An example can be as follows:

- Currency/Unit : Enumerated values can be taken from standard values like in [http://www.jhall.demon.co.uk/currency/by\\_country.html](http://www.jhall.demon.co.uk/currency/by_country.html)
- Value: The actual cost value in above specified currency/units.
- Duration: {year, month, week, day, hour, minute, second}
- Service-Info: {Unrestricted, Restricted }

#### 6.3.4.2.4 Security of Network (for Access Network + Operator)

Type	Description	Length	Value
TYPE_IE_NETWORK_SECURITY	Security of Network	Variable	Authentication Methods and Cipher suites used. The length, format and semantics of this field are specific to each link type and defined by each media-specific WG or SDO. In many cases, this field contains values of media-specific MIB objects used for representing security characteristics of the media.

### 6.3.4.2.5 QoS in Network (for Access Network + Operator)PoA specific information

Type	Description	Length	Value
TYPE_IE_NETWORK_QOS	QoS of Network	Variable	QoS classes and Traffic Specifications. The length, format and semantics of this field are specific to each link type and defined by each media-specific WG or SDO. In many cases, this field contains values of media-specific MIB objects used for representing QoS characteristics of the media.

### 6.3.4.3 Point of Attachment specific Information Elements

#### 6.3.4.3.1 PoA Location (for each PoA of Access Network + Operator combination )

Type	Description	Length	Value
TYPE_IE_POA_LOCATION	PoA Location	Variable	The Value field of RADIUS Location-Information attribute is encoded in this field. The encoding format is defined in draft-ietf-geopriv-radius-lo-04.txt.

Please refer to Table 9—, Table 10— and Table 11— for more details.

**Table 9—Value field format of PoA Location TLV**

Syntax	Length (octets)	Notes
LocationFormat	1	Format of location information 0: Civic location information 1: Geospatial location information
Method	1	Way location information was derived or discovered: 0: GPS 1: Assisted GPS 2: Manual 3: Provided by DHCP 4: Triangulation 5: Cell 6: IEEE 802.11 WLAN Access Point
L_LocationInformation	1	Length of <b>LocationInformation</b> in octets
LocationInformation	Variable	Civic location or Geospatial location information attributes

**Table 10—Value field format of PoA Location Information (Civic Address)**

Syntax	Length (octets)	Notes
Country Code	2	Two-letter ISO 3166 country code in capital ASCII letters
L_CivicAddressElements	1	Length of CivicAddressElements in octets
CivicAddressElements	Variable	Civic address elements

**Table 11—Value field format of PoA Location Information (Geospatial location)**

Syntax	Length (bits)	Notes
LatitudeResolution	6	
Latitude	34	
LongitudeResolution	6	
Longitude	34	
AltitudeType	4	Following codes are defined: 1: Meters 2: Floors
AltitudeResolution	6	
Altitude	30	
Datum	8	1: WGS 2: NAD 83 (with associated vertical datum for North American vertical datum for 1998) 3: NAD 83 (with associated vertical datum for Mean Lower Low Water (MLLW))

**6.3.4.3.2 PoA Data Rate (for each PoA of Access Network + Operator combination )**

Type	Description	Length	Value
TYPE_IE_POA_DATA_RATE	PoA Data Rate	4 octets	Data rate

### 6.3.4.3.3 PoA MAC Type (for each PoA of Access Network + Operator combination )

Type	Description	Length	Value
TYPE_IE_POA_MAC_TYP E	MAC Type	Variable	The length, format and semantics of this field are specific to each link type and defined by each media-specific WG or SDO. In many cases, this field contains values of media-specific MIB objects used for representing a MAC type of the media. An example for 802.16 is WmanIfMacVersion (of type INTEGER) of WMAN-IF-MIB. Another example for 802.11 is dot11StationConfigEntry (of type Dot11StationConfigEntry) of IEEE802dot11-MIB.

### 6.3.4.3.4 PoA Channel Range (for each PoA of Access Network + Operator combination )

Type	Description	Length	Value
TYPE_IE_POA_CHANNEL _RANGE	Channel range	8 octets	Channel Range (Low, High)

### 6.3.4.3.5 PoA Subnet Information

Type	Description	Length	Value
TYPE_IE_POA_SUBNET_I NFORMATION	PoA subnet Info	Variable	This field contains a list of subnets to which the link of the PoA belongs. The encoding format is defined in Table 12—

**Table 12—Value field format of PoA Subnet Information TLV**

Syntax	Size (octets)	Notes
N_Subnet	1	The number of Subnets.
For (i=0; i<N_Subnet; i++) {		
Address	Variable	An IP address of the PoA encoded as Address base type of Diameter protocol (RFC3588). AddressType is encoded in the first 2-octet, which must be either 1 (IPv4) or 2 (IPv6).
L_Prefix	1	The bit length of the prefix of the subnet to which <b>Address</b> belongs. <b>L_Prefix</b> <=32 for IPv4 subnet and <b>L_Prefix</b> <=128 for IPv6 subnet
}		

#### 6.3.4.3.6 PoA Capabilities (for each PoA of Access Network + Operator combination )

Type	Description	Length	Value
TYPE_IE_POA_CAPABILITIES	PoA Capabilities	4 octets	PoA Capability bitmap Bit 0: Security Y/N Bit 1: QoS Y/N Bit 2: Internet Access Y/N Bit 3: IP Version 4 Y/N Bit 4: IP Version 6 Y/N Bit 5: Emergency Services Y/N Bit 6-31 : Reserved

#### 6.3.4.3.7 PoA PHY Type (for each PoA of Access Network + Operator combination )

Type	Description	Length	Value
TYPE_IE_POA_PHY_TYPE	PHY Type	Variable	The length, format and semantics of this field are specific to each link type and defined by each media-specific WG or SDO. In many cases, this field contains values of media-specific MIB objects used for representing a PHY type of the media. An example for 802.16 is an OID suffix (4-octet integer) of an object defined as a subclass of wmanIfBsPhy in WMAN-IF-MIB. Another example for 802.11 is the value of dot11PHYType instance (of type INTEGER) in IEEE802dot11-MIB.

#### 6.3.4.3.8 PoA Address

Type	Description	Length	Value
TYPE_IE_POA_ADDRESS	Link-layer address of PoA	Variable	The link-layer address of the PoA encoded as Address base type of Diameter protocol (RFC3588). AddressType is encoded in the first 2-octet.

### 6.3.5 Request for Information Elements

The client sends an Information Request to the MIH PoS. The Information request contains query for Information Elements. The MIH PoS sends an Information response which contains the response of the query back to the client.

Information Request (From Client to Information Server)

Type	Length	Additional Parameters
Type values of IEs queried	Length of any Additional Parameters	Any other parameters required for request

## Information Response (from Information Server to Client)

Type	Length	Value
Type value of IEs	Length of Value field	Value field of different IEs

Below are few examples of request and response for different Information Elements.

**6.3.5.1 List of Networks (Link Types)****6.3.5.1.1 Request for List of Networks**

Type	Length	Additional Parameters
TYPE_IE_LIST_OF_NETWORKS	0	

**6.3.5.1.2 Response for List of Networks**

Type	Length	Value
TYPE_IE_LIST_OF_NETWORKS	Variable	List of different link types. Four (4) octets for each link

**6.3.5.2 Number of Operators (for each link type)****6.3.5.2.1 Request for Number of Operators**

Type	Length	Additional Parameters
TYPE_IE_NUMBER_OF_OPERATOR S	4	Link type (4 octets)

**6.3.5.2.2 Response for Number of Operators**

Type	Length	Value
TYPE_IE_NUMBER_OF_OPERATOR S	4	Number of Operators for specified link type

**6.3.5.3 List of Operators (for each link type)****6.3.5.3.1 Request for List of Operators**

Type	Length	Additional Parameters
TYPE_IE_LIST_OF_OPERATORS	4	Link Type (4 octets)

### 6.3.5.3.2 Response for List of Operators

Type	Length	Value
TYPE_IE_LIST_OF_OPERATORS	Variable	Number of Operators (4 octets) followed by TLV for each Operator Identifier

### 6.3.6 Information Reports

Information Reports allow client devices to query the information server for a pre-defined report. The format of these reports are well established in advance. Some of these reports and their format are described below.

#### 6.3.6.1 General Information Report

This report provides information about the General Information Elements.

##### 6.3.6.1.1 Request for General Network Information Report (for all link types)

Type	Length	Additional Parameters
TYPE_REPORT_GENERAL_INFORMATION	0	

##### 6.3.6.1.2 Response for General Network Information Report (for all link types)

Type	Length	Value (octets)		
TYPE_REPORT_GENERAL_INFORMATION	Variable	Number of Links (1)		
Include an entry for each link specified in Number of Links		Link Type_1 (4)	Number of Operators for Link_Type_1 (1)	List of Operators TLV for Link_Type_1 (Variable)
		Link Type_2 (4)	Number of Operators for Link_Type_2 (1)	List of Operators TLV for Link_Type_2 (Variable)
		Link Type_3 (4)	Number of Operators for Link_Type_3 (1)	List of Operators TLV for Link_Type_3 (Variable)
		.....	.....	.....

#### 6.3.6.2 Access Network Information Report

This report provides information about Access Networks. Two different report formats are available. The client can obtain information about a single access network by specifying the Link Type and Operator Identifier fields in the request. Alternately the client can also obtain information about all access networks in the neighborhood as well.

### 6.3.6.2.1 Request for Access Network Information Report (for each link type and Operator)

Type	Length	Additional Parameters	
TYPE_REPORT_ACCESS_NETWORK	Variable	Link Type (4)	Operator Identifier TLV (Variable)

### 6.3.6.2.2 Response for Access Network Information Report (for each link type and Operator)

Type	Length	Value (octets)						
TYPE_REPORT_ACCESS_NETWORK	Variable	Link Type (4)	Operator Identifier TLV (Variable)	Number of PoAs (1)	List of Roaming Partner TLVs (Variable)	Cost TLV (Variable)	QoS TLV (Variable)	Network Security TLV (Variable)

### 6.3.6.2.3 Request for Access Network Information Report (for all link types)

Type	Length	Additional Parameters
TYPE_REPORT_ALL_ACCESS_NETWORKS	Variable	

### 6.3.6.2.4 Response for Access Network Information Report (for all link types)

Type	Length	Value (octets)						
TYPE_REPORT_ALL_ACCESS_NETWORKS	Variable	Number of Links (1)						
Include an entry for each Link Type in Number Of Links		Link Type_1 (4)	Operator Identifier TLV (Variable)	Number of PoAs (1)	List of Roaming Partner TLVs (Variable)	Cost TLV (Variable)	QoS TLV (Variable)	Network Security TLV (Variable)
		Link Type_2 (4)	Operator Identifier TLV (Variable)	Number of PoAs (1)	List of Roaming Partner TLVs (Variable)	Cost TLV (Variable)	QoS TLV (Variable)	Network Security TLV (Variable)
		.....	.....	.....	.....	.....	.....	.....

### 6.3.6.3 Point of Attachment Information Report

This report provides information about Points of Attachment of different access networks. The client can obtain PoA report for any single access network by specifying the Link Type and Operator Identifier parameters in the request.

### 6.3.6.3.1 Request for PoA Information Report (for each link type and Operator)

Type	Length	Additional Parameters	
TYPE_REPORT_POA	Variable	Link Type (4)	Operator Identifier TLV (Variable)

### 6.3.6.3.2 Response for PoA Information Report (for each link type and Operator)

Type	Length	Value (octets)							
TYPE_REPORT_POA	Variable	Link Type (4)	Operator Identifier TLV (Variable)	Number of PoAs (1)					
Include an entry for each PoA in Number of PoAs		PoA_1 Address TLV (Variable)	PoA_1 Location TLV (Variable)	PoA_1 Data Rate TLV (Variable)	PoA_1 PHY Type TLV (Variable)	PoA_1 MAC Type TLV (Variable)	PoA_1 Channel Range TLV (Variable)	PoA_1 Subnet Information TLV (Variable)	PoA_1 capability bitmap TLV (Variable)
		PoA_2 Address TLV (Variable)	PoA_2 Location TLV (Variable)	PoA_2 Data Rate TLV (Variable)	PoA_2 PHY Type TLV (Variable)	PoA_2 MAC Type TLV (Variable)	PoA_2 Channel Range TLV (Variable)	PoA_2 Subnet Information TLV (Variable)	PoA_2 capability bitmap TLV (Variable)
		.....	.....	.....	.....	.....	.....	.....	.....

### 6.3.7 Primitives for Information Service

The generic model of Information Service primitives specifies the format of information requests that are passed from the MIH Function on the mobile node or client device to the MIH Function on the network. The Information Service primitives are defined as follows:

InformationXX. request (RequestSource, InformationRequestSet) where,

- RequestSource: is used to identify the source entity where the query for information originated
- InformationRequestSet: is an extensible parameter that may contain implementation specific information and may be different across different queries. InformationRequestSet completely describes the query that is issued

InformationXX. response (ResponseSource, InformationResultSet) where,

- ResponseSource: is used to identify the source entity where the response for information originated
- InformationResultSet: is an extensible parameter that may contain the result of the request and may be different across different queries.

### 6.3.8 Information Service Schema

A schema defines structure of information. A schema is used in the 802.21 information service to define the structure of each information element as well as the relationship among different information elements sup-

ported. The 802.21 information service schema needs to be supported by every MIH Function that implements the MIIS to support flexible and efficient information queries. The 802.21 information service defines the various information elements and their structure. The various IEs represent information about lower layers of network stack as well as about higher layer services available in different access networks. A schema is defined by a language and can be represented in multiple ways. Examples include Resource Description Framework (RDF) which is based on XML, ASN.1 which is used in 802 MIBs, Variants or a simple TLV representation of different information elements. The MIIS schema is classified into two major categories.

- Basic schema that is essential for every MIH to support and
- Extended schema that is optional and can be vendor specific

### 6.3.8.1 RDF Schema Representation

This section gives an example of schema using Resource Description Framework (RDF) [8]. RDF uses

SPARQL as a query language for querying information. Both RDF schema and SPARQL are represented in XML. An RDF schema defines the structure of set of expressions, where the underlying structure of any expression is a collection of triples, each consisting of a subject, a predicate and an object. XML syntax for RDF called RDF/XML. RDF has the following advantages:

- Supports both hierarchical and non-hierarchical information structure
- Allows for flexible data query
- Allows for distributed schema definition
- Easier way to change the schema definition

In order to strictly define each information element in an RDF schema, the schema is augmented with Web Ontology language (OWL) [OWL]. OWL is a Web Ontology language. OWL uses both URLs for naming and the description framework provided by RDF to add the following capabilities to ontologies:

- Ability to be distributed across many systems
- Scalability
- Compatibility with other Web standards for accessibility and internationalization
- Openness and extensibility

OWL builds on RDF and RDF Schema and adds more vocabulary for describing properties and classes: among others, relations between classes (e.g. disjoint-ness), cardinality (e.g. "exactly one"), equality, richer typing of properties and characteristics of properties (e.g. symmetry), and enumerated classes.

As described earlier, the RDF schema definition for MIIS consists of two parts; the basic and the extended schema. The basic schema is not supposed to be updated. An MIH entity is pre-provisioned with the basic schema for ease of implementation of schema-based query. In scenarios where the basic schema is not pre-provisioned methods such as DHCP may be used to access URL of the basic schema.

Unlike the basic schema, the extended schema is expected to be updated periodically, e.g., when a new link-layer technology is introduced. The extended schema can be retrieved from the specified URL via the IEEE 802.21 information service using the schema query capability without any pre-provision of such extended schema. The URL of the extended schema can also be obtained via the schema URL query capability. Alternatively other methods such as DHCP may be enabled for finding out the URL of extended schema. The extended schema is defined as an extension of the basic schema and includes data structure and relationship of media-specific or higher-layer information. In that sense extended schema is the complement of basic schema.

Figure 23 — shows an example graphical representation of the 802.21 MIIS basic schema in which 'PoA', 'Subnet-Information', 'Address', 'Channel-Range', 'PoA-Location', 'Operator-Identifier', 'Geospatial-Loca-

tion-Information', 'Civic-Location-Information', 'Country-Address-Elements' , 'Country-Address-Element' are represented as classes, while all others are properties of classes. The lines indicate either the range or domain of a property or a sub-class of a class. In particular 'r' represents the range of a property and 'd' represents domain of a property. 'Domain' defines the class that a particular property belongs to and 'range' defines a type of a particular property.

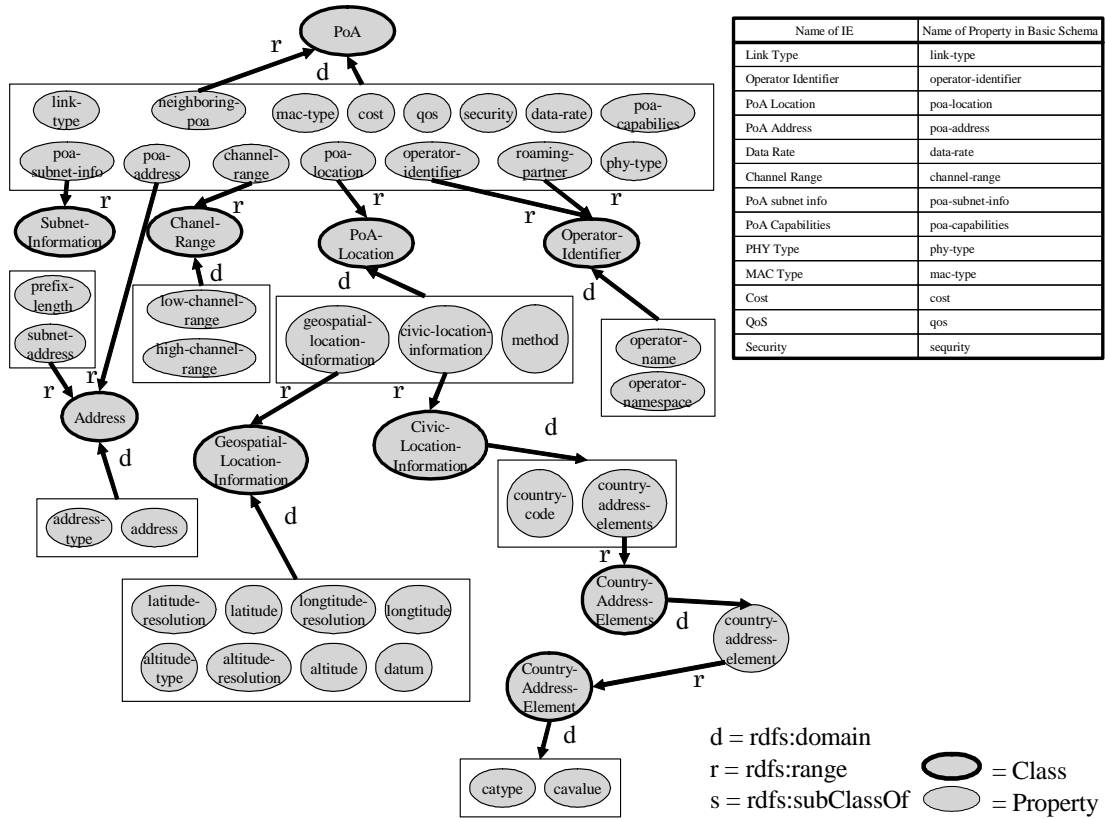


Figure 23 — A Graphical Representation of basic schema

6.3.8.2 The MIIS Schema

The basic and extended schema and their textual description in different formats are included in Annex C. Basic schema is normative and contains list of mandatory information elements and their properties. Extended schema is optional and contains an exhaustive list of information resources and properties.

6.3.9 Information Flow

Figure 24 — describes an information flow based on L2 transport. MIIS within MIHF (MIH Function) is communicating with the remote MIHF that is residing within the access network. MIH PoA in this figure is either an AP or a BS. Link\_Get\_Information from the MN is carried over L2 frame and delivered to the remote MIH. Remote MIH returns the necessary information via appropriate response frame.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

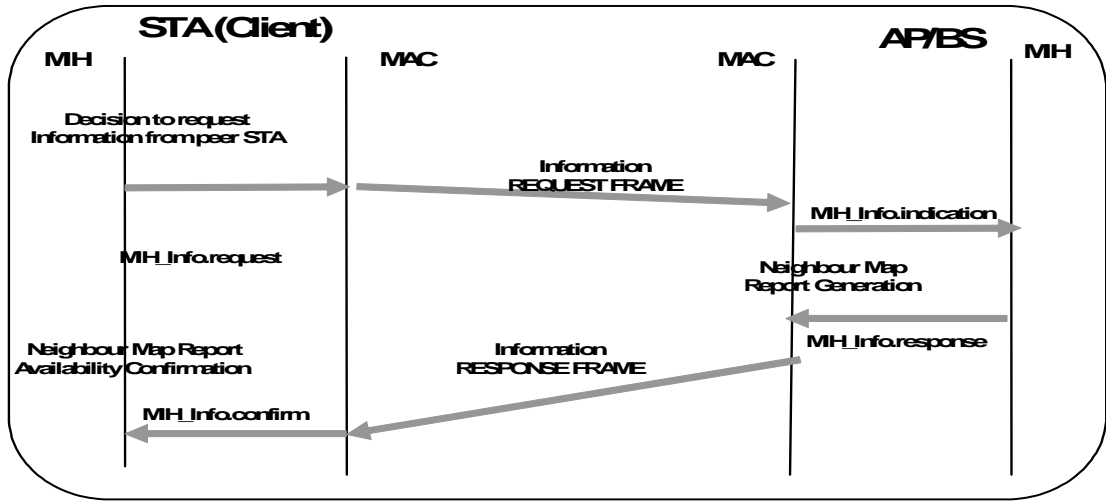


Figure 24 — L2-based MIIS information flow

Figure 25 — describes an information flow based on L3 transport. MIIS within MIHF (MIH Function) is communicating with the remote MIHF that is residing either within the access network or in the core network. MIH PoA in this figure is either an AR or some other entity in the network. MIH\_Get\_Information from the MN is carried over L3 frame and delivered to the remote MIH. Remote MIH returns the necessary information via appropriate response frame.

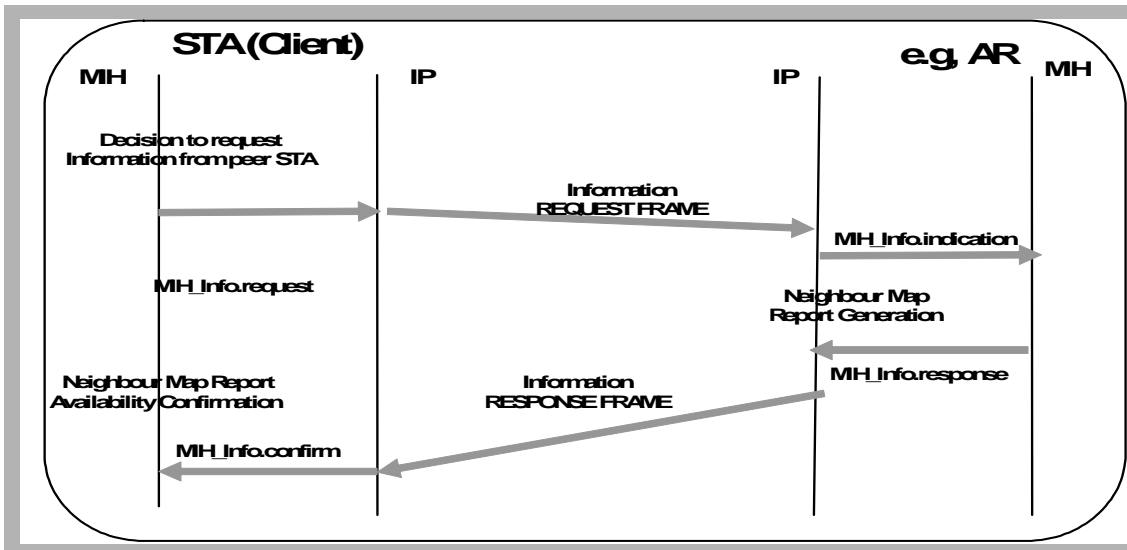


Figure 25 — L3-based MIIS information flow

## 7. Service Access Points (SAPs) and Primitives

### 7.1 Introduction

The MIH Function uses the following key SAPs for interfacing with other entities.

#### 7.1.1 Media Dependent SAPs

- 1) MLME\_SAP: The MIH Function uses this SAP for interfacing with link layer of 802.11 networks. Primitives defined as part of this SAP are recommended as enhancements to 802.11 link layer SAPs.
- 2) M\_SAP: The MIH Function uses this SAP for interfacing with the Management plane of the 802.16 network.
- 3) C\_SAP: The MIH Function uses this SAP for interfacing with the Control plane of the 802.16 network.
- 4) MIH\_3GLINK\_SAP: This SAP defines the interface between the MIH Function and the different protocol elements of the 3G system.

#### 7.1.2 Media Independent SAPs

- 1) MIH\_SAP: This SAP defines the interface between MIH Function and MIH Users.

#### 7.1.3 Network Management SAPs

- 1) MIH\_NMS\_SAP: The MIH Function uses this SAP for interfacing with the Network Management entity in the 802.11 network.

## 7.2 SAPs

### 7.2.1 Media Dependent SAPs

#### 7.2.1.1 MLME\_SAP

<TBD>

#### 7.2.1.2 M\_SAP

M\_SAP is defined by IEEE 802.16g and it may include, but is not limited to primitives related to:

- System configuration
- Monitoring Statistics
- Notifications/Triggers

#### 7.2.1.3 C\_SAP

C\_SAP is defined by IEEE 802.16g and it may include, but is not limited to primitives related to:

- Handovers (e.g. notification of HO request from MS, etc.)
- Idle mode mobility management (e.g. Mobile entering idle mode)
- Subscriber and session management (e.g. Mobile requesting session setup)
- Radio resource management
- AAA server signaling (e.g. EAP payloads)
- Media Independent Function Services

The key primitives defined as part of C\_SAP are described in the table below.

**Table 13—C\_SAP Primitives**

No	Primitives	Description
1.	M_Ranging	Upper layers can control ranging procedure with these primitives. Upper layers shall commence 802.16 link setup procedure by sending M_Ranging.request primitive through NCMS. Note: M_Ranging.request primitive with ranging type: "initial" is an 802.16 Link Switch Link Command (link setup) which corresponds to Link Switch MIH command
2.	M_Registration	Upper layers can control registration procedure with these primitives. Upper layers are notified of link setup by M_Registration.confirmation. Note: M_Registration.confirmation primitive is an 802.16 Link_Up Link Event.
3.	M_Neighbor	When 802.16 MAC receives neighbor advertisement (MOB_NBR-ADV), this primitive is used to deliver the information to upper layers. Upper layers can schedule scanning period with BS. During scanning period BS may buffer downlink traffic to the mobile terminal.
4.	M_ScanScheduling	When 802.16 MAC receives neighbor advertisement (MOB_NBR-ADV), this primitive is used to deliver the information to upper layers. Upper layers can schedule scanning period with BS. During scanning period BS may buffer downlink traffic to the mobile terminal.
5.	M_Scanning	Upper layers can command autonomous scanning with these primitives. Note: These primitives are Scan Link Command for MIH Scan command in 802.21.
6.	M_ScanReport	Delivery of the primitives shall be based on the pre-registration procedure between upper layer management entities and NCMS. Scan report can be made remotely to the BS or locally to the upper layer entity depending on the report target value in M_ScanReport.request.
7.	M_MACHandover	Upper layers can control handover procedure by using these primitives. Note: These primitives can be used as link commands for MIH_Handover_initiate.request/response. For remote command service, 802.16 MAC management messages shall be used. (MOB_MSHO-REQ/MOB_BSHO-REQ/MOB_BSHO-RSP) Currently only parameters relevant to 802.16 handover are included. Parameters for Media Independent Handover shall be identified and added.
8.	M_HOIND.request/confirmation	An MS transmits a MOB_HO-IND message for final indication that is about performing a HO. Note: This primitive is a Link Command of MIH_Handover_Commit.request/response MIH Command in the .21 draft. For remote service, 802.16 MAC management message shall be used. (MOB_HO-IND). Currently only parameters relevant to 802.16 handover are included. Parameters for Media Independent Handover shall be identified and added.
9.	M_Management	These primitives are used to manage the status of mobile terminal. Upper layer can change the status of mobile terminal into power on/down/hold/de-register, etc. Note: These can be mapped to MIH Configure MIH Command Service. For remote service, 802.16 MAC management messages can be used. (RES-CMD/ DREG-CMD)

#### 7.2.1.4 MIH\_3GLINK\_SAP

3GPP and 3GPP2 service primitives for GSM, UMTS, LAC, PPP and LTE/SAE can use to access IEEE 802.21 services. This can be done by establishing a relationship between the 3GPP/3GPP2 primitives and IEEE 802.21 primitives at both the link layer and at the MIH level.

Table 20— lists this mapping. Note that a 3GPP primitive group can be mapped to more than one IEEE 802.21 primitives. E.g., "SMREG-PDP-MODIFY" can be mapped to a Link Up Primitive and it could also indicate the successful completion of a Handover, thereby mapping to a Handover Complete MIH-primitive as well. Likewise "L2 Condition Notification" as defined in reference [2] can be mapped to a Link Down Indication.

## 7.2.2 Media Independent SAPs

### 7.2.2.1 MIH\_SAP

The key primitives defined as part of MIH\_SAP are described in Table 14—.

**Table 14—MIH\_SAP Primitives**

No	Primitives	Service Category	Description
1	MIH Capability Discover	System Management	Discover list of Events and Commands supported by MIH Function.
2	MIH Event Register	Event	Register for MIH event notifications
3	MIH Event DeRegister	Event	Deregister for MIH event notifications
4	MIH Link Up	Event	L2 connection has been established
5	MIH Link Down	Event	L2 connectivity is lost
6	MIH Link Going Down	Event	L2 connectivity is predicted to go down
7	MIH Link Event Rollback	Event	Predicted event has not occurred and hence must be rolled back
8	MIH Link Parameters Report	Event	Link parameters have crossed specified threshold
9	MIH Link SDU Transmit Status	Event	Indicate transmission status of all PDU segments
10	MIH Link Handover Imminent	Event	L2 handover is imminent
11	MIH Link Handover Complete	Event	L2 handover has been completed
12	MIH Get Status	Command	Get the status of link

**Table 14—MIH\_SAP Primitives**

No	Primitives	Service Category	Description
13	MIH Switch	Command	Switch session between specified links
14	MIH Configure	Command	Configure link parameters and parameter thresholds
15	MIH Configure Link Thresholds	Command	Configure thresholds for Link events
16	MIH Scan	Command	Scan the network
17	MIH Handover Initiate	Command	Initiate handover
18	MIH Handover Prepare	Command	Prepare for handover and query available resources
19	MIH Handover Commit	Command	Terminal has committed to handover
20	MIH Handover Complete	Command	Handover has been completed
21	MIH Network Address Information	Command	Obtain network address on new link
22	MIH Get Information	Information	Request to get information from repository

**7.2.2.2 MIH\_LINK\_SAP**

The key primitives defined as part of MIH\_LINK\_SAP are described in Table 15—.

**Table 15—MIH\_LINK\_SAP Primitives**

No	Primitives	Service Category	Description
1	Link Event Discover	System Management	Discover link capabilities
2	Link Event Register	Event	Register for event notifications
3	Link Event Deregister	Event	Deregister for event notifications
4	Link Configure Thresholds	Command	Configure link thresholds for Link events
5	Link Up	Event	L2 connectivity is established
6	Link Down	Event	L2 connectivity is lost
7	Link Going Down	Event	L2 connectivity loss is imminent
8	Link Event Rollback	Event	Predicted event has not occurred and hence must be rolled back.
9	Link Parameters Change	Event	Link parameters have crossed specified thresholds

**Table 15—MIH\_LINK\_SAP Primitives**

No	Primitives	Service Category	Description
10	Link SDU Transmit Status	Event	Indicate transmission status of all PDU segments
11	Link Handover Imminent	Event	L2 handover is imminent
12	Link Handover Complete	Event	L2 handover has been completed
13	Link Get Information	Information	Request for IEs

### 7.2.3 Network Management SAPs

#### 7.2.3.1 MIH\_NMS\_SAP

The key primitives defined as part of MIH\_NMS\_SAP are described in Table 16—.

**Table 16—MIH\_NMS\_SAP Primitives**

No	Primitives	Service Category	Description
1	Initialize	System Mgmt	Initializes the MIH Function
2	Reset	System Mgmt	Resets the MIH Function
3	Install link	System Mgmt	Informs the MIH Function of a new link that has been added to the terminal device or the network. The interface to new link may have been hot plugged or powered on.
4	Remove link	System Mgmt	Informs the MIH Function of an existing link interface that has been removed. The interface to new link may have been removed dynamically or shut down.

## 7.3 Link Layer Primitives

### 7.3.1 Link\_Event\_Discover.request

#### 7.3.1.1 Function

This primitive is used by MIH Function to query and discover the list of supported link layer events.

#### 7.3.1.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Event_Discover.request    (
                                )
```

### 7.3.1.3 When generated

This primitive is generated by an upper layer entity of type MIH User that is seeking to receive link layer event notifications.

### 7.3.1.4 Effect on receipt

The recipient responds immediately with Link\_Event\_Discover.confirm primitive.

## 7.3.2 Link\_Event\_Discover.confirm

### 7.3.2.1 Function

This primitive returns the result of the query to discover link layer events request

### 7.3.2.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Event_Discover.confirm    (
                                SupportedEventList
                                )
```

Name	Type	Valid Range	Description
SupportedEvent List	Set of Event IDs	N/A	List of link layer events supported by the link layer

### 7.3.2.3 When generated

This primitive is generated in response to a Link\_Event\_Discover.request primitive.

### 7.3.2.4 Effect on receipt

The recipient may examine the returned event list and register for selective link layer indications.

## 7.3.3 Link\_Event\_Register.request

### 7.3.3.1 Function

This primitive is used by MIH Function (the registrant) to register an interest in a particular or group of event types from a particular event origination point. The response indicates which of the requested event types were successfully registered. Event types not successfully registered will not be delivered to the registrant.

### 7.3.3.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Event_Register.request    (
                                RequestedEventList
                                )
```

)

Name	Type	Valid Range	Description
RequestedEvent List	Set of Event IDs	Set of Valid link events	List of link layer events that the endpoint would like to receive indications for, from the Event Source

### 7.3.3.3 When generated

This primitive is generated by a registrant such as MIH Function that is seeking to receive event primitives from a point in the protocol stacks terminating either end of the link.

### 7.3.3.4 Effect on receipt

The recipient responds immediately with Link\_Event\_Register.confirm primitive.

## 7.3.4 Link\_Event\_Register.confirm

### 7.3.4.1 Function

This primitive returns the result of the registration request.

### 7.3.4.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Event_Register.confirm (
    ResponseEventList
)
```

Name	Type	Valid Range	Description
ResponseEvent List	Set of Event IDs and their registration status	N/A	List of link layer events along with their registration status

### 7.3.4.3 When generated

This primitive is generated in response to a Link\_Event\_Register.request primitive.

### 7.3.4.4 Effect on receipt

The recipient may examine the returned event list and learn about the registration status of different events.

## 7.3.5 Link\_Event\_Deregister.request

### 7.3.5.1 Function

This primitive is used by MIH Function (the registrant) to deregister for a set of link layer events.

### 7.3.5.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Event_Deregister.request (
    RequestedEventList
)
```

Name	Type	Valid Range	Description
RequestedEvent List	Set of Event IDs	Set of Valid link events	List of link layer events for which indications need to be deregistered from the Event Source

### 7.3.5.3 When generated

This primitive is generated by a registrant such as MIH Function that is seeking to deregister for already registered set of events.

### 7.3.5.4 Effect on receipt

The recipient responds immediately with Link\_Event\_Deregister.confirm primitive.

## 7.3.6 Link\_Event\_Deregister.confirm

### 7.3.6.1 Function

This primitive returns the result of the deregistration request.

### 7.3.6.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Event_Deregister.confirm (
    ResponseEventList
)
```

Name	Type	Valid Range	Description
ResponseEvent List	Set of Event IDs and their Deregistration status	N/A	List of link layer events along with their deregistration status

### 7.3.6.3 When generated

This primitive is generated in response to a Link\_Event\_Deregister.request primitive.

### 7.3.6.4 Effect on receipt

The recipient may examine the returned event list and learn about the deregistration status of different events.

## 7.3.7 Link\_Configure\_Thresholds.request

### 7.3.7.1 Function

This primitive is used by MIH Function or the link layer to configure a thresholds for Link Parameters Change indication.

### 7.3.7.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Configure_Thresholds.request (
    LinkParameter,
    InitiateActionThreshold,
    RollbackActionThreshold,
    ExecuteActionThreshold
)
```

Name	Type	Valid Range	Description
Link Parameter	Link Speed, Link Bit Error Rate, Link Frame Loss Rate before retransmission, Link Signal Strength		Parameters for which thresholds can be set
InitiateActionThreshold	Threshold values are dependent on parameter for which they are being set.		Threshold value which may cause Upper layers to start “setup” type activities in response to actual parameter values crossing this threshold.
RollbackActionThreshold	Threshold values are dependent on parameter for which they are being set.		Threshold value which may cause Upper layers to cancel or rollback the above setup type operation if the actual parameter values retreat to this threshold.
ExecuteActionThreshold	Threshold values are dependent on parameter for which they are being set.		Threshold value which may cause Upper layers to execute taking appropriate action if the actual parameter values cross this threshold.

### 7.3.7.3 When generated

This primitive is generated by an upper layer entity that may need to set threshold values for different link parameters.

### 7.3.7.4 Effect on receipt

The recipient responds immediately with Link\_Configure\_Threshold.confirm primitive.

## 7.3.8 Link\_Configure\_Thresholds.confirm

### 7.3.8.1 Function

This primitive is sent in response to the Link\_Configure\_Threshold.request primitive. This primitive specifies the status of threshold configuration operation.

### 7.3.8.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Configure_Thresholds.confirm(
    LinkParameter,
    Status
)
```

Name	Type	Valid Range	Description
Link Parameter	Link Speed, Link Bit Error Rate, Link Frame Loss Rate before retransmission, Link Signal Strength		Parameters for which thresholds can be set
Status			Success Error

### 7.3.8.3 When generated

This primitive is generated in response to the Link\_Configure\_Thresholds.request operation

### 7.3.8.4 Effect on receipt

The recipient prepares to receive Link Parameter Change notifications on successful execution of this primitive.

## 7.3.9 Link\_Up.indication

### 7.3.9.1 Function

This notification is delivered when a layer 2 connection is established on the specified link interface and when L3MP and other upper layers can send higher layer packets. All layer 2 activities in establishing the link connectivity are expected to be completed at this point of time.

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal

Name	Type	Valid Range	Description
LinkIdentifier	Media Specific		Unique link identifier that can be used to detect changes in network PoA. (SSID+BSSID) serves as unique network identifier for 802.11 networks
MacNewPoA	MAC Address		MAC Address of New PoA (AP/BS)
MacOldAccessRouter	MAC Address (Optional)		MAC Address of old Access Router (if any)
MacNewAccessRouter	MAC Address (Optional)		MAC Address of new Access Router (if any)
IP_Renewal_Indicator	Flag (Optional)		Indicates whether the MN shall change IP Address in the new PoA 0 : Change Required 1 : Change Not required
Mobility Management Protocol Support Type bitmap	BITMAP (Optional)		Indicates the type of Mobility Management Protocol supported by the new PoA 0 : Mobile IPv4 with FA (FA-CoA) 1 : Mobile IPv4 without FA (Co-located CoA) 2 : Mobile IPv6 3 : Mobile IPv6 with DHCPv6 4 : SIP

### 7.3.9.2 When generated

This notification is generated when a layer 2 connection is established for the specified link interface.

### 7.3.9.3 Effect on receipt

Higher layers may take different actions on this notification. The handover policy function may start collecting routing metrics for this link and may consider this link as a potential candidate for establishing future connections. When higher layer connections are being established over this link, the Transport layer may adjust transport (TCP) related parameters based on link properties.

## 7.3.10 Link\_Down.indication

### 7.3.10.1 Function

This notification is delivered when a layer 2 connection is broken on the specified link and when no more packets can be sent on the specified link

Event Source: {Local Link}

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
MacoldPoA	MAC Address		MAC Address of old PoA

Name	Type	Valid Range	Description
MacOldAccessRouter	MAC Address (Optional)		MAC Address of old Access Router (if any)
ReasonCode	REASON_CODE_TYPE		Reason for why the link went down such as disassociated with PoA, failure in transmitting/acknowledging the frames, etc.

The reason code for Link\_Down can be one or combination of the following reasons.

Reason Code Id	Reason Code	Meaning
1	RC_EXPLICIT_DISCONNECT	The link is down because of explicit disconnect procedures initiated either by client or network
2	RC_PACKET_TIMEOUT	The link is down because no acknowledgements were received for transmitted packets within the specified time limit.
3	RC_FAIL_NORESOURCE	The link is down because there were no resources to maintain the connection
4	RC_FAIL_NO_BROADCAST	The link is down because broadcast messages (control frames such as beacons) could not be received by client device
5 – 127	Reserved	Reserved
128 - 255	RC_VENDOR_SPECIFIC	Vendor Specific reason code.

### 7.3.10.2 When generated

This notification is generated when layer 2 connectivity is lost. Layer 2 connectivity may be lost explicitly in cases where the terminal may initiate disassociate type procedures. In other cases the terminal may infer loss of link connectivity due to successive timeouts for acknowledgements of retransmitted packets along with loss of reception of broadcast frames.

### 7.3.10.3 Effect on receipt

Higher layers may take different actions on this notification. The handover policy may eliminate this link from list of active links for routing connections and may consider handing over any potential active connections to other more suitable links.

## 7.3.11 Link\_Going\_Down.indication

### 7.3.11.1 Function

This notification is delivered when a Layer 2 connection is expected (predicted) to go down (Link\_Down) within a certain time interval. Link\_Going\_Down event may be the indication to initiate handover procedures. Different applications may have different requirements with respect to the time interval required to anticipate in advance a link going down and make adequate a priori preparation to handover a connection depending on Application Class. Hence upper layers such as a L3 mobility protocol may actually configure the time interval in which a Link\_Going\_Down event may be delivered. This would allow the flexibility for the time interval to be in msec, 100s of msec or even seconds.

Event Type:Predictive

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
MACNewPoA	MAC Address (Optional)		MAC Address of New PoA
MacOldAccessRouter	MAC Address (Optional)		MAC Address of old Access Router (if any)
MacNewAccessRouter	MAC Address (Optional)		MAC Address of new Access Router (if any)
TimeInterval	Time in msec		Time Interval in which the link is expected to go down. The link connectivity is expected to be available at least for time specified by <i>TimeInterval</i>
ConfidenceLevel	Percentage (0-100)		The confidence level for link to go down within the specified time interval
UniqueEventIdentifier	0 – 65535		Used to uniquely identify the event. To be used in case of event rollback

### 7.3.11.2 When generated

A Link\_Going\_Down event implies that a Link\_Down is imminent within a certain time interval. If Link\_Down is NOT received within specified time interval then actions due to previous Link\_Going\_Down may be rejected.

A 100% confidence would indicate certainty that the link is definitely going down within the specified time interval. For example a BS that may have decided to shut down for administrative reasons may send down a Link\_Going\_Down trigger with 100% confidence level. Predictions based on changes in link parameters such as signal strength values would typically have a lower confidence level. Different links would typically use implementation specific methods to predict future loss in link connectivity.

### 7.3.11.3 Effect on receipt

Higher layers may take different actions on this notification. Upper layers may prepare to initiate handovers based on the confidence level reported as part of the event.

## 7.3.12 Link\_Event\_Rollback.indication

### 7.3.12.1 Function

Link\_Event\_Rollback is used in conjunction with Link\_Going\_Down. In case of Link\_Going\_Down if the link is no longer expected to go down in the specified time interval, then a Link\_Event\_Rollback message is sent to the Event destination. The destination should disregard or rollback the changes associated with the event identifier in such cases.

Event Type:Administrative

## Parameters

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
UniqueEventIdentifier	0 – 65535		Used to identify the event which needs to be rolled back

**7.3.12.2 When generated**

This notification is generated when a predictive event expected to occur within a certain time interval is no longer expected to occur before the expiry of the indicated time interval.

**7.3.12.3 Effect on receipt**

Higher layers may reevaluate the link under consideration by retrieving other link quality related parameters. Any handover procedures that may have already been initiated may need to be rescinded.

**7.3.13 Link\_Detected.indication****7.3.13.1 Function**

Link\_Detected indicates that a new type of link has been detected for use. This may imply that the terminal is in the coverage area and can listen to a beacon, or that the terminal may have received a response to a probe. Link\_Detected does not guarantee that the terminal would be able to establish connectivity with the detected link, but just that the terminal can attempt to gain connectivity. Upper layers including MIH Function may evaluate additional properties of the link before attempting to establish a L2 connection with the link.

Event Type:State Change

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
MIH Capability	Flag		0 : MIH Capability Not Supported 1 : MIH Capability Supported
Link Type	Enumerated link types		Type of link
MACNewPoA	MAC Address (optional)		MAC Address of New PoA

**7.3.13.2 When generated**

This notification is generated when a new link type is detected. The detection can be based on a beacon or response to a probe or even through the Information Service.

### 7.3.13.3 Effect on receipt

Upper layers include MIH Function may discover additional properties of the link before selecting it for establishing connectivity.

### 7.3.14 Link\_Parameters\_Change.indication

#### 7.3.14.1 Function

Link\_Parameters\_Change indicates changes in link parameters have crossed specified threshold levels. This may include link layer parameters such as Speed of the link, QoS, BER, etc. The threshold level for each such parameter may have to be configured through a separate command to link layer.

Event Type:State Change

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
MacAccessRouter	MAC Address (Optional)		MAC Address of current Access Router (if any)
Link Parameter Type	Enumerated link types		Media specific parameter types that have crossed thresholds
oldValueOfLinkParameter			Specify the old value of link parameter
newValueOfLinkParameter			Specify the new value of link parameter

Examples of link layer parameters that could trigger this event include:

- Link Speed
- Link Bit Error Rate
- Link Frame Loss Rate before Retransmission
- Link Received Signal Strength

#### 7.3.14.2 When generated

This notification is generated when a link layer parameter crosses a configured threshold.

#### 7.3.14.3 Effect on receipt

Higher layers may take different actions on this notification. If parameters related to link quality cross a certain threshold then that link may need to be evaluated for handing over current connections. The MIH Function may collectively evaluate different parameters and give appropriate indications to higher layers regarding suitability of different links.

### 7.3.15 Link\_SDU\_Transmit\_Status.indication

#### 7.3.15.1 Function

Link\_SDU\_Transmit\_Status indicates the transmission status of the higher layer PDU. A success status indicates that all segments belonging to a higher layer packet (PDU) have been successfully delivered from the ARQ module of link layer in current node to the ARQ module in link layer in peer node. A higher layer intermediate buffer management entity could use this indication to flush higher layer packets stored in any intermediate buffers. A failure status indicates that at least one segment belonging to a higher layer packet (PDU) was not delivered successfully from the ARQ module of link layer in current node to the ARQ module in link layer in peer node.

Event Type:Link Transmission

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
PacketIdentifier	N/A		Identifier for higher layer data packet that was delivered successfully.
Status			0: Success 1: Failure

#### 7.3.15.2 When generated

A success notification is generated when all the link layer segments belonging to a higher layer PDU are successfully transmitted over the link.. A failure notification is generated when any link layer segment corresponding to a higher layer PDU was not transmitted successfully.

#### 7.3.15.3 Effect on receipt

Higher layers may take different actions on this notification. A higher layer intermediate buffer management entity in MIH could use the success indication to flush higher layer packets stored in any intermediate buffers and a failure indication to retransmit higher layer packets stored in any intermediate buffers, especially if there are changes in access network during handovers.

### 7.3.16 Link\_Handover\_Imminent. Indication

#### 7.3.16.1 Function

Link Handover Imminent is generated when a native link layer handover or switching decision has been made and its execution is imminent (as opposed to Link Going Down which only indicates that a link is losing connectivity due to a change in certain link condition such as signal strength, but does not guarantee that an autonomous link switchover has been decided by the link layer). It contains information about the new point of attachment of the mobile node. It also contains information about any application specific data that might be useful for the application running on the mobile node. Link Handover Imminent can be used by upper layers (e.g., transport ) to initiate handover specific adaptation and as an enabler for initiating effective make-before-break handovers thereby reducing packet loss due to link layer handovers. This is a link layer

1 event that exists for intra-technology handovers defined in many media types (e.g., cellular, 802.16e). MIH  
 2 can receive the Link Handover Imminent events from the link layer and pass them to upper layer as MIH  
 3 events for both inter-technology and intra-technology handover cases.  
 4

5  
 6 Event Type:Link Synchronous  
 7

8 Parameters:  
 9

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
MACNewPoA	MAC Address		MAC Address of New AP/BS
MacOldAccessRouter	MAC Address		MAC Address of old Access Router (if any)
MacNewAccessRouter	MAC Address		MAC Address of new Access Router (if any)

### 22 7.3.16.2 When generated

23  
 24  
 25 Depending on whether it is the Mobile node or the Network, it is generated when a native link layer han-  
 26 dover or switching decision has been made and its execution is imminent.  
 27

### 28 7.3.16.3 Effect on receipt

29  
 30  
 31 Application may take necessary actions to minimize the effect of the pending native link layer handover or  
 32 switching on user data transfer. For example, to cover the handover period (when packets cannot be trans-  
 33 ferred), the network can proactively start sending the additional data as soon as it has received indication  
 34 about the event and should expect a request from the mobile specifying how much data it needs to cover the  
 35 handover period. This event may also be used as an indication to start buffering packets.  
 36  
 37

## 38 7.3.17 Link\_Handover\_Complete.Indication

### 39 7.3.17.1 Function

40  
 41  
 42 Link Handover Complete event is generated whenever a native link layer handover/switching has just been  
 43 completed (as opposed to Link Up which only indicates that a link has been brought up for L2 connectivity,  
 44 but does not indicate that a native link handover/switchover has just been completed by the link layer). Noti-  
 45 fying the upper layer of this event can improve transport, session and application layer responsiveness to  
 46 autonomous link changes. They can better adapt their data flows by resuming flows upon receiving this indi-  
 47 cation. The upper layer can also use this event to check whether its IP configuration needs to be updated.  
 48 This is a link layer event that exists for intra-technology handovers defined in many media types (e.g., cellu-  
 49 lar, 802.16e). This event is applicable for terminal side only and is valid only for intra-technology han-  
 50 dovers. MIH Function can receive the Link Handover Complete events from the link layer and pass them to  
 51 upper layer as MIH events.  
 52  
 53  
 54

55  
 56 Event Type:Link Synchronous  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
MACNewPoA	MAC Address		MAC Address of New AP/BS
MacOldAccessRouter	MAC Address		MAC Address of old Access Router (if any)
MacNewAccessRouter	MAC Address		MAC Address of new Access Router (if any)

### 7.3.17.2 When generated

This is generated whenever a L2 link layer handover or switching has just been completed.

### 7.3.17.3 Effect on receipt

Upon reception of this event, an upper layer (e.g., transport) can stop any handover adaptation that it has engaged to cope with the just completed native link layer handover/switching and resume normal data transfer. This event may also be used as an indication that a re-verification of the IP parameter should be considered.

### 7.3.18 Link\_Get\_Information.request

#### 7.3.18.1 Function

This primitive is used by the link layer to retrieve values of specified Information Elements.

#### 7.3.18.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Get_Information.request (
    RequestSource,
    InformationElementType,
    InformationElementReqParams
)
```

Name	Type	Valid Range	Description
Request Source	INFORMATION_SOURCE	N/A	The origination point from where information request originated
InformationElement-Type	Type value of IE		This identifies the IE uniquely. The IE can be nested as well.
InformationElementReqParams	Other parameters that may need to be specified as part of the information request.		Request specific additional parameters.

INFORMATION\_SOURCE is defined as follows.

{Local Node, Remote Node}. Local and remote is referred with respect to origination of request

### 7.3.18.3 When generated

This primitive is generated by an upper layer entity that may need to get values of certain Information Elements

### 7.3.18.4 Effect on receipt

The recipient responds immediately with Link\_Get\_Information.response primitive.

## 7.3.19 Link\_Get\_Information.response

### 7.3.19.1 Function

This primitive is issued in response to Link\_Get\_Information.request to provide values of requested Information Elements.

### 7.3.19.2 Semantics of service primitive

The primitive parameters are as follows:

```
Link_Get_Information.response (
    ResponseSource,
    InformationElementType,
    InformationElementValueLength,
    InformationElementValues
)
```

Name	Type	Valid Range	Description
Request Source	INFORMATION_SOURCE	N/A	The origination point from where information request originated
InformationElement-Type	Type value of IE		This identifies the IE uniquely. The IE can be nested as well.
InformationElementValueLength			Specifies the length of each IE value in the response frame
InformationElementValue			Specifies value of each IE requested

INFORMATION\_SOURCE is defined as follows.

{Local Node, Remote Node}. Local and remote is referred with respect to origination of request

### 7.3.19.3 When generated

This primitive is generated in response to the Link\_Get\_Information.request primitive

### 7.3.19.4 Effect on receipt

The recipient retrieves the value of requested IEs and proceeds to use them in handover operations.

## 7.4 MIH Primitives

The key primitives defined as part of MIH\_SAP are described below.

### 7.4.1 MIH Capability Discover

#### 7.4.1.1 MIH\_Capability\_Discover.request

##### 7.4.1.1.1 Function

This primitive is used by MIH Users to discover MIH capability of different links.

##### 7.4.1.1.2 Semantics of service primitive

```
MIH_Capability_Discover.request (
    SourceIdentifier,
    DestinationIdentifier,
    SupportedEventList,
    SupportedCommandList
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
SupportedEventList	Flag	Set of supported events	List of supported events on the client
SupportedCommandList	Flag	Set of supported commands	List of supported commands on the client

##### 7.4.1.1.3 When generated

This primitive is generated by MIH Users that need to determine MIH capability information of the link layers.

##### 7.4.1.1.4 Effect on receipt

MIH Function capable entities may respond with MIH\_Capability\_Discover.response primitive.

### 7.4.1.2 MIH\_Capability\_Discover.response

#### 7.4.1.2.1 Function

This primitive is used by MIH Function to convey supported MIH capabilities about Event Service, Command Service and Information Service.

#### 7.4.1.2.2 Semantics of service primitive

```

MIH_Capability_Discover.response (
    SourceIdentifier,
    DestinationIdentifier,
    SupportedEventList,
    SupportedCommandList
)

```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
SupportedEventList	Flag	Set of supported events	List of supported events on MIHF
SupportedCommandList	Flag	Set of supported commands	List of supported commands on MIHF

#### 7.4.1.2.3 When generated

This primitive is generated when MIH\_Capability\_Discover.request primitive is received by MIH Function.

#### 7.4.1.2.4 Effect on receipt

Upon reception of this primitive the receiving entity becomes aware of supported MIH capabilities.

#### 7.4.2 MIH Event Register

Please see the description for Link Event Register command

#### 7.4.3 MIH Event Deregister

Please see the description for Link Event Deregister command

#### 7.4.4 MIH Event Configure

Please see the description for Link Configure Thresholds command

#### 7.4.5 MIH Events

Most of the MIH events directly correspond to link layer events. Please see the description for corresponding link layer events. Other MIH events which are different than link events are described in the below section.

### 7.4.5.1 MIH\_Link\_Parameters\_Report.indication

### 7.4.5.2 Function

MIH\_Link\_Parameters\_Report notification is sent by the MIH Function to upper layers to indicate various values of link parameters. The list of available link parameters is TBD.

The event can be local or remote.

Parameters:

Name	Type	Valid Range	Description
MacMobileTerminal	MAC Address		MAC Address of Mobile Terminal
LinkIdentifier			Unique link identifier that can be used by the upper layer to identify from which link this parameter report is issued.
Link Parameter Type	Enumerated link types		Media specific parameter types that have crossed thresholds
LinkParameterList			A list of triples of {LinkParameterType, oldValueofLinkParameter, newValueOf-LinkParameter}

Examples of link layer parameters that could trigger this event include:

- Link Speed
- Link Bit Error Rate
- Link Frame Loss Rate before Retransmission
- Link Received Signal Strength

### 7.4.5.3 When generated

This notification is generated either at a predefined regular interval determined by a user configurable timer or when a specified parameter of the currently active interface crosses a configured threshold.

### 7.4.5.4 Effect on receipt

Upper layer entities may take different actions on this notification. For example, a Mobility Management entity locally or remotely located from the event origination may take these events into account in its decision algorithm.

### 7.4.6 MIH Get Status

A MIH Get Status command is issued by upper layer entities to discover and monitor the status of the currently connected and potentially available links. A MIH Get Status command may be local or remote. For example, a local get status may help the policy function that resides out of MIH to make optimal handover decisions for different applications when multiple links are available in a terminal. A remote initiated MIH Get Status from the network side may enable the network to collect the status information on multiple links in a terminal through the currently connected link.

Upper layer entities may query the lower layers periodically in a specified interval or based on the preferences in a policy engine, which is out of the scope of the standard.

#### 7.4.6.1 MIH\_Get\_Status.request

##### 7.4.6.1.1 Function

This primitive is issued by uppers to discover the status of the currently connected and potentially available links.

##### 7.4.6.1.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```
MIH_Get_Status.request (
    SourceIdentifier,
    DestinationIdentifier,
    GetStatusRequestSet
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
Get Status Request Set	Set of status requests	Set of status requests	Containing a set of interested status information.

##### 7.4.6.1.3 When generated

This primitive is generated when L3 or upper layers request the status information from lower layer links.

##### 7.4.6.1.4 Effect of receipt

A local MIH Get Status command causes the specified link to issue a Link Get Status command to get the information on the status of the links. A remote MIH Get Status command causes the peer MIH entity to issue the local MIH Get Status command.

#### 7.4.6.2 MIH\_Get\_Status.response

##### 7.4.6.2.1 Function

This primitive is issued by the MIH entity to report the status of the links in response to the requests of upper layers.

##### 7.4.6.2.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```

1 MIH_Get_Status.response (
2     SourceIdentifier,
3     DestinationIdentifier,
4     GetStatusRequestSet
5 )
6
7
8
9

```

#### 7.4.6.2.3 When generated

This primitive is generated when MIH receive the status information and report to L3 or upper layers.

#### 7.4.6.2.4 Effect of receipt

Upon receipt of the link status information, the upper layers make decisions and take actions.

Name (Get Status Requests)	Type	Valid Range	Description
NETWORK_TYPES	Integer	0x01 – 802.3 0x02 – 802.11 0x03 – 802.16 0x04 – 3GPP 0x05 – 3GPP2	The network type of the link that is queried. Upper layers may selectively query a certain link type.
DEVICE_INFO	N/A	N/A	Information on manufacturer, model number, revision number of the software/firmware and serial number in displayable text are returned.
OPERATION_MODE	Integer	0x00 – Normal Mode 0x01 – Power Saving Mode 0x02 – Power Down	Returns the link's current power mode.
NETWORK_ID	N/A	N/A	Return the ID of the network that the link is currently configured to communicate with.
CHANNEL_ID			The ID of the channel currently in use
CHANNEL_QUALITY			Current Connection Quality
LINK_SPEED			Bits per second
BATTERY_LEVEL	Integer	0-100; battery level in percentage; -1; unknown battery level	
Media Dependent	N/A	N/A	TBD

## 7.4.7 MIH Switch

### 7.4.7.1 MIH\_Switch.request

#### 7.4.7.1.1 Function

This primitive is generated by upper layers to switch an active session from one link to another. After upper layer entities makes handover decision, a MIH Switch command may be issued by upper layer entities to switch the active session from one link to another. MIH Function may execute the MIH\_Switch command by using combination of a set of Link Command. For example, the MIH entity may establish new connection by Link Connect command, and disconnect the old link by Link Disconnect command, or turn the old link to sleep mode by Link Sleep command, or even power down it by Link Power Down command.

#### 7.4.7.1.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```
MIH_Switch.request (
    SourceIdentifier,
    DestinationIdentifier,
    HandoverMode,
    OldLinkIdentifier,
    OldLinkActions
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
HandoverMode	Enumerate	Make-before-Break Break-before-Make	The handover mode decides the sequence of the execution of link command. If it is make-before-break, the Link Connect of the new link is executed before Link Disconnect of old link; if it is break-before-make, Link Connect is after the Link Disconnect
New Link Identifier			
Old Link Identifier			
Old Link Actions	Enumerate	Link Disconnect; Link Sleep; Link Power Down	Upper layers may choose which action the old link should takes.

#### 7.4.7.1.3 When generated

This primitive is generated when L3 or upper layers makes handover decision and try to disconnect the old link and establish the new link.

#### 7.4.7.1.4 Effect of receipt

Upon receipt of the MIH Switch command, MIH checks the HandoverMode field first. If it is make-before-break, MIH tries to execute Link Connect to establish the new link before the old link is gone. If it is break-before-make, MIH tries to disable the old link before the new link is established. Depending on the Old Link Actions, MIH may select the ways to disable the old link: disconnect the old link by calling Link Disconnect; turn the link to sleep mode by calling Link Sleep; or shut down the old link by Link Power Down.

#### 7.4.7.2 MIH\_Switch.response

##### 7.4.7.2.1 Function

This primitive is issued by the MIH entity to report the result of the MIH Switch command.

##### 7.4.7.2.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```
MIH_Switch.response (
    SourceIdentifier,
    DestinationIdentifier,
    ResultCode
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
ResultCode		Success; Failure; Rejected	Result of trying to switch the link

##### 7.4.7.2.3 When generated

This primitive is generated when MIH receive the results of the Link Commands.

##### 7.4.7.2.4 Effect of receipt

Upon receipt of the result code, the upper layers make evaluations and take actions.

#### 7.4.8 MIH Configure

MIH Configure may be issued by upper layer entities to control the behavior of lower layer, for example, to set some feature of the driver of a specific link. MIH Configure may contain the configuration commands for multiple lower layer links. When MIH receives MIH Configure, it issues the Link Configure Thresholds commands to corresponding links. The configuration parameter are passed on to Link Configure Thresholds commands.

### 7.4.8.1 MIH\_Configure.request

#### 7.4.8.1.1 Function

This primitive is issued by uppers to control the behavior of a set of lower layer links.

#### 7.4.8.1.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```
MIH_Configure.request (
    SourceIdentifier,
    DestinationIdentifier,
    ConfigurationRequestsSets
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
Configuration Request Sets	Set of configuration parameters for corresponding interfaces	Set of configuration parameters for corresponding interfaces each defined in Table 7.2.	Containing a set of configuration parameters.

#### 7.4.8.1.3 When generated

This primitive is generated when L3 or upper layers attempt to control the behaviors of lower layer links, for example, set some features in the drivers.

#### 7.4.8.1.4 Effect of receipt

A local configure command causes the MIH to issue a Link Configure Threshold command to set the thresholds for lower layers according to the specified configuration parameters. A remote configure command causes the MIH in the peer entity to issue a Link Configure Threshold command. If multiple links need to be configured then Link Configure Threshold command should be sent to each of the links.

Name	Type	Valid Range	Description
NETWORK_TYPES_IN_USE	Integer	0x01 – 802.3 0x02 – 802.11 0x03 – 802.16 0x04 – 3GPP 0x05 – 3GPP2	Set the network type that should be used for the lower layer entity, e.g., a driver.
OPERATION_MODE	Integer	0x00 – Normal Mode 0x01 – Power Saving Mode 0x02 – Power Down	Change the device's power mode

DISABLE_TRANSMITTER	N/A	N/A	Enable/disable the transmitter of the interface.
NETWORK_ID	N/A	N/A	Change to the specified network of an interface.
CURRENT_ADDRESS			Change the current address to the value specified
SUSPEND_DRIVER	N/A	N/A	Suspend or resume of the specified interface.

### 7.4.8.2 MIH\_Configure.response

#### 7.4.8.2.1 Function

This primitive is issued by the MIH entity to report the result of the MIH Configure command.

#### 7.4.8.2.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```
MIH_Configure.response (
    SourceIdentifier,
    DestinationIdentifier,
    ResultCode
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
ResultCode		Success; Failure; Rejected	Result of trying to configure the link

#### 7.4.8.2.3 When generated

This primitive is generated when MIH receive the results of the Link Commands.

#### 7.4.8.2.4 Effect of receipt

Upon receipt of the result code, the upper layers make evaluations and take actions.

## 7.4.9 MIH Scan

A MIH Scan command is issued by upper layer entities to discover the neighboring POA of the access networks. MIH Scan may contain the scan command for multiple links. The scan command for each link is defined in the related SDO and beyond the scope of the standard. If the currently active link is required to scan, it is most likely that the on-going session is interrupted.

### 7.4.9.1 MIH\_Scan.request

#### 7.4.9.1.1 Function

This primitive requests a survey of potential PoA that the MN may later elect to try to join.

#### 7.4.9.1.2 Semantics of the service primitive

The parameters of the primitive are as follows:

```
MIH_Scan.request (
    SourceIdentifier,
    DestinationIdentifier,
    ScanResultSets
)
```

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
Scan Request	Defined in related SDOs.	Defined in related SDOs.	Defined in related SDOs.

#### 7.4.9.1.3 When generated

This primitive is generated when L3 or upper layers request a survey of access networks.

#### 7.4.9.1.4 Effect of receipt

If multiple links are requested, multiple Link Scan commands are issued to the specified MACs, carrying the media specific Scan Request information. The Link Scan should be defined in related SDOs.

### 7.4.9.2 MIH\_Scan.response

#### 7.4.9.2.1 Function

This primitive returns the descriptions of the set of PoAs detected by the scan process.

#### 7.4.9.2.2 Semantics of the service primitive

The parameters of the primitive are as follows:

MIH\_Scan.response (
   
SourceIdentifier,
   
DestinationIdentifier,
   
Scan Response Sets
   
)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
Scan Response Set	Defined in related SDOs.	Defined in related SDOs.	Defined in related SDOs.

#### 7.4.9.2.3 When generated

This primitive is generated by the MIH as a result of a MIH\_Scan.request.

#### 7.4.9.2.4 Effect of receipt

Upper layers act on the scan results.

### 7.4.10 MIH Handover Initiate

#### 7.4.10.1 MIH\_Handover\_Initiate.request

##### 7.4.10.1.1 Function

This primitive is used by MIH Function on a terminal or network to communicate with peer MIH Function on a network or a terminal. The primitive is used to communicate intent of handover initiation. The handover can be initiated either by the client or by the network.

##### 7.4.10.1.2 Semantics of service primitive

The parameters of the primitive are as follows:

MIH\_Handover\_Initiate.request (
   
SourceIdentifier,
   
DestinationIdentifier,
   
CurrentLinkIdentifier,
   
SuggestedNewLinkIdentifier,
   
SuggestedNewPoAIdentifier,
   
HandoverMode,
   
CurrentLinkAction,
   
)

Local or Remote: Both

MIHF (Terminal) &lt;&gt; MIHF (Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.
SuggestedNewLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks		This is the identifier of new network to which handover needs to be initiated.
SuggestedNew-PoAIdentifier	MAC_ADDRESS (Optional)		This is the preferred Point of Attachment (AP/BS) on new network
HandoverMode	Make-before_Break Break-before-Make		The handover mode may influence the manner in which links are prepared for handover
CurrentLinkAction	LINK_DISCONNECT LINK_LOW_POWER LINK_POWER_DOWN LINK_NO_ACTION		Specifies suggested action on old link once handover procedures have been executed.
QueryResourceList	BOOL		Flag to query the available list of resources on the new link

#### 7.4.10.1.3 When generated

This primitive is generated by an upper layer entity such as a Handover Policy engine, L3 Mobility protocol like MIP, Application or some other entity that may want to cause a change in the current selected link. This command can be sent either to just the local MIH Function or it can be sent to the remote MIH Function as well.

#### 7.4.10.1.4 Effect on receipt

The remote MIH Function responds with MIH\_Handover\_Initiate.response primitive. If the recipient of the command is a network MIH function, it may perform a MIH\_Handover\_Prepare message exchange with the MIH Function in the target link under consideration before sending the response message.

## 7.4.10.2 MIH\_Handover\_Initiate.response

### 7.4.10.2.1 Function

This primitive is used by a peer MIH Function to communicate with the MIH Function that sent out a MIH\_Handover\_Initiate.request. The primitive is used to communicate the response of handover initiation request. The response can be sent either by the client or the network depending on where the request was initiated.

### 7.4.10.2.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Handover_Initiate.response (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier,
    HandoverAck,
    PreferredLinkIdentifier,
    PreferredPoAIdentifier,
    AbortReason
)
```

Local or Remote: Both

MIHF (Terminal) <> MIHF (Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.
HandoverAck	BOOL	0 or 1	1: Initiate Handover 0: Abort Handover If the handover has to be aborted then a reason code is provided
PreferredLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks		This is the identifier of new network to which handover needs to be initiated. This may be different than the network that was suggested in the handover request.

PreferredPoAIdentifier	MAC_ADDRESS		This is the preferred Point of Attachment (AP/BS) on new network. This may be different than what was suggested in handover request.
AbortReason			Lists the reason for aborting/declining the handover request.
Available Resource List			List of available resources on new link

#### 7.4.10.2.3 When generated

The MIH Function responds with this primitive in response to a MIH\_Handover\_Initiate.request command from a peer MIH Function entity.

#### 7.4.10.2.4 Effect on receipt

On receiving the response the entity which originally initiated the handover request may decide to carry out the handover or abort it based on the response. If the recipient of the command is a client MIH function and in case the handover is to be executed, it may also provide information about selected network and selected PoA on the selected network with a MIH Handover Commit message.

### 7.4.11 MIH Handover Prepare

#### 7.4.11.1 MIH\_Handover\_Prepare.request

##### 7.4.11.1.1 Function

This primitive is used by a MIH function on the serving network to communicate with its peer MIH function on the candidate network. This is used to prepare the new link resource for impending handover and to query the available link resource of the candidate network.

##### 7.4.11.1.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Handover_Prepare.request (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier,
    QueryResourceList,
)
```

Local or Remote: Both

MIHF (old Network) <> MIHF (new Suggested Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.

Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.
QueryResourceList			List of resources to be queried at the new candidate network.

#### 7.4.11.1.3 When generated

This primitive is generated after receiving the MIH\_Handover\_Initiate.request protocol message from the MIH function on the terminal in case of terminal initiated handover. In case of network initiated handover case, this can be generated by the upper layer entity such as a Handover Policy engine.

#### 7.4.11.1.4 Effect on receipt

This peer MIH function on the candidate network identifies the link resource usage and prepares resources for the impending handover.

### 7.4.11.2 MIH\_Handover\_Prepare.response

#### 7.4.11.2.1 Function

This primitive is used by a MIH function on the candidate network to communicate with its peer MIH function on the serving network which sent out a MIH\_Handover\_Prepare.request. This is used to respond the result of resource preparation of the impending handover and to notify the MIH function on the serving network of the link resource status of the candidate network

#### 7.4.11.2.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Handover_Prepare.response (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier,
    ResourceStatus,
    AvailableResourceList,
)
```

Local or Remote: Both

MIHF (old Network) <> MIHF (new Suggested Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.

1 2 3 4 5	Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
6 7 8 9 10 11 12	CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.
13 14 15 16	ResourceStatus			Specifies whether requested resources are available or not at the new PoA.
17 18 19 20 21	AvailableResourceList			List of resources actually available at the new suggested network and the new networkPoA.

#### 22 23 24 **7.4.11.2.3 When generated**

25 The MIH Function on the candidate network responds with this primitive in response to a  
26 MIH\_Handover\_Prepare.request from a peer MIH Function entity on the serving network.  
27

#### 28 29 **7.4.11.2.4 Effect on receipt**

30 After receiving the response, the MIH Function on the serving network can send  
31 MIH\_Handover\_Initiate.response to terminal.  
32  
33

### 34 35 **7.4.12 MIH\_Handover\_Commit**

#### 36 37 **7.4.12.1 MIH\_Handover\_Commit.request**

##### 38 39 **7.4.12.1.1 Function**

40 This primitive is used by a peer MIH Function to communicate with the remote MIH Function on network.  
41 The primitive is used to communicate commitment to perform handover based on selected choices for candidate network and PoA.  
42  
43  
44  
45

##### 46 47 **7.4.12.1.2 Semantics of service primitive**

48 The parameters of the primitive are as follows:

```
49 MIH_Handover_Commit.request (
50     SourceIdentifier,
51     DestinationIdentifier,
52     NewLinkIdentifier,
53     MACNewPoA,
54     CurrentLinkAction
55 )
56  
57  
58  
59
```

60 Local or Remote: Both  
61  
62  
63  
64  
65

MIHF (Terminal) <> MIHF (Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
NewLinkIdentifier	Can be one of different 802 or cellular networks		This specifies the new network to which the connection needs to be handed over.
MACNewPoA	MAC Address.		MAC Address of New PoA
CurrentLinkAction	Bitmap		Specifies suggested action on old link once handover procedure has been excuted: 0: LINK_DISCONNECT 1: LINK_LOW_POWER 2: LINK_POWER_DOWN 3: LINK_NO_ACTION 4: Reserved

#### 7.4.12.1.3 When generated

This primitive is generated when successful MIH\_Handover\_Initiate.response is received to allow a terminal to begin handover and the mobile terminal decides to perform actual handover based on suggested choices for candidate network and PoA.

#### 7.4.12.1.4 Effect on receipt

The receipt may identify that the terminal starts handover to the selected network.

### 7.4.12.2 MIH\_Handover\_Commit.response

#### 7.4.12.2.1 Function

This primitive is used by a peer MIH Function to communicate with the MIH Function that has sent out the MIH\_Handover\_Commit.request. The primitive is used to communicate the response of a handover commit request.

#### 7.4.12.2.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Handover_Commit.response (
    DestinationIdentifier,
    SourceIdentifier,
    CurrentLinkAction,
    HandoverStatus
)
```

Local or Remote: Both

MIHF (old Network) <> MIHF (new Suggested Network)

#### 7.4.12.2.3 When generated

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkAction	Bitmap		Specifies suggested action on old link once handover procedure has been executed: 0: LINK_DISCONNECT 1: LINK_LOW_POWER 2: LINK_POWER_DOWN 3: LINK_NO_ACTION 4: Reserved
HandoverStatus	Boolean	0,1	0: Abort handover 1: Perform handover

This primitive is generated in response to MIH\_Handover\_Commit.request primitive.

#### 7.4.12.2.4 Effect on receipt

The client recipient may initiate handover process and begin setting up of new layer 2 connection. The network recipient may determine that the handover procedure is in progress to the intended network.

### 7.4.13 MIH\_Handover\_Complete

#### 7.4.13.1 MIH\_Handover\_Complete.request

##### 7.4.13.1.1 Function

This primitive is used by a peer MIH Function to communicate with the remote MIH Function. This is used to communicate the completion of handover operation.

##### 7.4.13.1.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Handover_Complete.request (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier
)
```

Local or Remote: Both

MIHF (old Network) <> MIHF (new Suggested Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.

#### 7.4.13.1.3 When generated

The MIH Function responds with this primitive when handover operations to the new network PoA have been completed.

#### 7.4.13.1.4 Effect on receipt

Upon receipt, the receiving MIH Function in the old link can start forwarding any pending or remaining packets and also release any resources in use by the old link. Upon receipt, the receiving MIH Function on the new link must forward the message to the MIH Function in the old link.

### 7.4.13.2 MIH\_Handover\_Complete.response

#### 7.4.13.2.1 Function

This primitive is used by a peer MIH Function to communicate with the MIH Function that has sent out the MIH\_Handover\_Complete.request. This primitive is used to send a response to the handover complete request.

#### 7.4.13.2.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Handover_Complete.response (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier
)
```

Local or Remote: Both

MIHF (old Network) <> MIHF (new Suggested Network)

Name	Type	Valid Range	Description
------	------	-------------	-------------

Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.

#### 7.4.13.2.3 When generated

The MIH Function responds with this primitive after processing the handover complete request.

#### 7.4.13.2.4 Effect on receipt

Upon receipt, the client MIH Function can determine that the handover complete request was processed successfully. Upon receipt, the MIH Function in the new network may forward this message to the client.

### 7.4.14 MIH\_Network\_Address\_Information

#### 7.4.14.1 MIH\_Network\_Address\_Information.request

##### 7.4.14.1.1 Function

This primitive is delivered from MIH Function on old PoA to another MIH Function on new PoA in order to discover mobile terminal's network address related information before handover. Upon reception of this message, the MIHF on new PoA can either interact with upper layer to achieve enough information or further deliver this message to the MIHF in the network, e.g Access Router with MIHF which may have enough information on this message. This also can trigger the network entity, e.g, Access Router or Foreign Agent to send out Mobility related messages directly to the mobile terminal.

##### 7.4.14.1.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Network_Address_Information.request (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier,
    MACMobileTerminal,
    HomeAddress,
    CoA,
    OldAccessRouterAddress,
    OldFAAddress
)
```

Local or Remote: Both

MIHF (Network) &lt;&gt; MIHF (Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.
MACMobileTerminal	MAC Address		MAC Address of Mobile Terminal
Home Address	IP Address		Home IP address of Mobile Terminal
CoA	IP Address		Care of Address of Mobile Terminal
Old FA Address	IP Address		IP address of old Foreign Agent. This parameter is only included when mobile terminal is using Mobile IPv4.
Old Access Router Address	IP Address		IP address of old Access Router. This parameter is only included when mobile terminal is using IPv6.

#### 7.4.14.1.3 When generated

When the mobile terminal initiates handover which may be informed by Link\_Going\_Down remote event service, old PoA generates this message to achieve network address related information prior to the handover.

#### 7.4.14.1.4 Effect on receipt

Upon reception of this primitive, the MIHF on new PoA can either interact with upper layer to achieve enough information or further deliver this message to the MIHF in the network, e.g Access Router with MIHF which may have enough information on this message. When this primitive is delivered to the upper layer of the MIHF in the network, e.g, Access Router with MIHF, this can trigger to send network address related information, e.g, Router Advertisement either directly to the mobile terminal or to MIHF.

## 7.4.14.2 MIH\_Network\_Address\_Information.response

### 7.4.14.2.1 Function

This primitive is used by a peer MIH Function to communicate with the MIH Function that sent out a MIH\_Network\_Address\_Information.request. The primitive is used to communicate the response of MIH\_Network\_Address\_Information.request. The response can be sent either by the new PoA or the network entity, e.g, Access Router or Foreign Agent, depending on where the related information is available.

### 7.4.14.2.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Network_Address_Information.response (
    SourceIdentifier,
    DestinationIdentifier,
    CurrentLinkIdentifier,
    MACMobileTerminal,
    HomeAddress,
    FAAddress,
    AccessRouterAddress,
    NetworkAddressInformation
)
```

Local or Remote: Both

MIHF (Network) <> MIHF (Network)

Name	Type	Valid Range	Description
Source Identifier	Identifier	Any valid individual or group identifier	The identifier of entity where the request is initiated. This field may be optionally left empty if the command is local.
Destination Identifier	Identifier	MIH_LOCAL, MIH_REMOTE	The destination identifier of request or response. This is the identifier of local or peer MIH Function.
CurrentLinkIdentifier	NetworkIdentifier. Can be one of different 802 and Cellular networks.		This identifies the current access network over which the command needs to be sent. This is valid only for remote commands which need to be sent to remote MIHF. The command is then sent either at L2 or at L3.
MACMobileTerminal	MAC Address		MAC Address of Mobile Terminal
Home Address	IP Address		Home IP address of Mobile Terminal
FA Address	IP Address		IP address of Foreign Agent. This parameter is only included when mobile terminal is using Mobile IPv4,

Access Router Address	IP Address		IP address of Access Router This parameter is only included when mobile terminal is using IPv6
Network Address Information			In case of Mobile IPv4, Agent Advertisement is encapsulated and in case of Mobile IPv6, Router Advertisement is encapsulated.

#### 7.4.14.2.3 When generated

The MIH Function responds with this primitive in response to a MIH\_Network\_Address\_Information.request command from a peer MIH Function entity. The old PoA can also generate this message to deliver the received network address information further to the mobile terminal.

#### 7.4.14.2.4 Effect on receipt

When the new PoA receives this message from the network entity, new PoA further delivers this primitive to the old PoA. When the mobile terminal receives this primitive, MIHF delivers this to the mobility management protocol or handover policy engine.

### 7.4.15 MIH Get Information

#### 7.4.15.1 MIH\_Get\_Information.request

##### 7.4.15.1.1 Function

This primitive is used by a station's MIH (or an application on behalf of MIH) to request information either from the network or from a remote MIH. The information query can be related to a specific interface, attributes to the network interface as well as entire network capability. The service primitive has the flexibility to query either a specific data within a network interface or extended schema of a given network.

##### 7.4.15.1.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Get_Information.request (
    InfoQueryFilter,
    InfoQueryParameters
)
```

Name	Type	Valid Range	Description
InfoQueryType	An integer value corresponding to one of the following types: 1: TLV 2: RDF_DATA 3: RDF_SCHEMA_URL 4: RDF_SCHEMA	N/A	The type of query that is specified

InfoQueryParameters	Query type specific parameters	N/A	Query type specific parameters which indicate the type of information the client may be interested in.
---------------------	--------------------------------	-----	--

InfoQueryType:

- TLV: When this InfoQueryType is specified, the InfoQueryParameters must be a binary string which encodes an Information Element TLV that carries a Request defined in Section "Information Request and Response".
- RDF\_DATA: When this InfoQueryType is specified, InfoQueryParameters is a string which contains a SPARQL (Protocol and RDF Query language) query [2] where the SPARQL query is supposed to contain an appropriate query for obtaining expected RDF/XML data.
- RDF\_SCHEMA\_URL: When this InfoQueryType is specified, InfoQueryParameters is a null string. This InfoQueryType is used for obtaining the URL of the extended schema.
- RDF\_SCHEMA: When this InfoQueryType is specified, InfoQueryParameters carries either the URL of the extended schema the querier wants to obtain or a null string when the URL of the extended schema is unknown.

#### 7.4.15.1.3 When generated

This primitive is generated by a MIH User that is seeking to retrieve information.

#### 7.4.15.1.4 Effect on receipt

The recipient tries to interpret the query request and retrieve the specified information. Once the information is retrieved the recipient responds with MIH\_Get\_Information.response primitive.

### 7.4.15.2 MIH\_Get\_Information.response

#### 7.4.15.2.1 Function

This primitive is used by MIH to respond to a MIH\_GET\_Information.request primitive.

#### 7.4.15.2.2 Semantics of service primitive

The parameters of the primitive are as follows:

```
MIH_Get_Information.response (
    InfoQueryType,
    MIH_REPORT,
    Status
)
```

Name	Type	Valid Range	Description
InfoQueryType	An integer value corresponding to one of the following types: 1: TLV 2: RDF_DATA 3: RDF_SCHEMA_URL 4: RDF_SCHEMA	N/A	The type of query that is specified

MIH_REPORT	String	N/A	Report consisting of information requested by the MIH User
Status	Success/Failure	N/A	Specifies whether the information was successfully retrieved or not.

InfoQueryType:

- TLV: When this InfoQueryType is specified, the InfoQueryParameters must be a binary string which encodes an Information Element TLV that carries a Request defined in Section "Information Request and Response".
- RDF\_DATA: When this InfoQueryType is specified, InfoQueryParameters is a string which contains a SPARQL (Protocol and RDF Query language) query [2] where the SPARQL query is supposed to contain an appropriate query for obtaining expected RDF/XML data.
- RDF\_SCHEMA\_URL: When this InfoQueryType is specified, InfoQueryParameters is a null string. This InfoQueryType is used for obtaining the URL of the extended schema.
- RDF\_SCHEMA: When this InfoQueryType is specified, InfoQueryParameters carries either the URL of the extended schema the querier wants to obtain or a null string when the URL of the extended schema is unknown.

#### 7.4.15.2.3 When generated

This primitive is generated by MIH Function that is responding to a previous query retrieve information.

#### 7.4.15.2.4 Effect on receipt

The MIH User that requested the information tries to interpret the MIH\_REPORT and take suitable action.

### 7.4.15.3 Example Queries

#### 7.4.15.3.1 Example Query for TLV

An example query request and response when TLV is specified as InfoQueryType is shown below.

MIH\_Information.request (TLV, Request IE)

MIH\_Information.response (TLV, Response IE, Success)

#### 7.4.15.3.2 Example Query for RDF\_DATA

An example query request and response when RDF\_DATA is specified as InfoQueryType to obtain a list of 802.11 point of attachments (i.e., BSSIDs) around a specific location where the location is represented as an 802.11 point of attachment is shown below.

MIH\_Information.request (RDF\_DATA, "PREFIX mihbase: <URL\_TO\_BE\_ASSIGNED>

SELECT ?poa-address

WHERE { ?x1 mihbase:neighboring-poa ?x2 .

    ?x2 mihbase:link-type 19 .

    ?x2 mihbase:poa-address ?poa-address .

```

1      ?x1 mibase:poa-address ?x3 .
2
3      ?x3 mibase:address "001122334455" })
4
5  MIH_Information.response(RDF_DATA, "<?xml version='1.0'?>
6
7  <sparql xmlns='http://www.w3.org/2005/sparql-results#'>
8
9
10 <head>
11
12 <variable name='poa-address'/>
13
14 </head>
15
16 <results>
17
18 <result>
19
20 <binding name='poa-address'><literal datatype='http://www.w3.org/2001/XMLSchema#hexBinary'>aab-
21 bccddeeff</literal></binding>
22
23 <binding name='poa-address'><literal datatype='http://www.w3.org/2001/XMLSchema#hexBi-
24 nary'>0123456789ab</literal></binding>
25
26 </result>
27
28 </results>
29
30 </sparql>", Success)

```

#### 7.4.15.3.3 Example Query for RDF\_SCHEMA\_URL

An example query request and response when XML\_SCHEMA\_URL is specified as InfoQueryType is shown below.

```

43 MIH_Information.request(RDF_SCHEMA_URL, "")
44
45 MIH_Information.response(RDF_SCHEMA_URL,
46
47 "http://www.networkdiscovery.org/2005/04/rdf-extended-schema/", Success)

```

#### 7.4.15.3.4 Example Query for RDF\_SCHEMA

An example query request and response when RDF\_SCHEMA is specified as InfoQueryType to obtain the extended schema is shown below.

```

56 MIH_Information.request(RDF_SCHEMA, "")
57
58 MIH_Information.response(RDF_SCHEMA,
59
60 "<?xml version='1.0'?>
61
62 <!DOCTYPE rdf:RDF [

```

1 <!ENTITY rdf 'http://www.w3.org/1999/02/22-rdf-syntax-ns#>  
2  
3 <!ENTITY rdfs 'http://www.w3.org/2000/01/rdf-schema#>  
4  
5 ]>  
6  
7 <rdf:RDF xmlns:rdf="&rdf;" xmlns:rdfs="&rdfs;">  
8  
9 ...  
10  
11 </rdf:RDF>", Success)  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

## 8. Media Independent Handover Protocol

### 8.1 Introduction

The MIH Function provides asynchronous and synchronous services through well defined SAPs for lower layers and upper layers. The services provided include the Event Service (ES), Command Service (CS), and Information Service (IS). Detailed description about MIH services are found in Section 5.3. MIH SAPs include the MIH upper layer SAP, which is used by the users of MIH to gain access to various MIH Function services, and MIH lower layer SAPs, which are used by MIH Function to gain access and control of a variety of media dependent lower layer resources.

The Media Independent Handover protocol defines frame formats for exchanging messages between peer MIH Function entities. These messages are based on the primitives which are part of Media Independent Event service, Media Independent Command service and Media Independent Information service. IEEE802.21 supports Media Independent Handover Function in mobile terminal, and network. The MIHF Protocol allows peer MIH Function entities to interact with each other.

### 8.2 MIH Protocol Transport


The table below shows the various transport options for different media types.

**Table 17—Transport Options for MIH Protocol**

No	Media Type	L2 Transport Description	L3 Transport Description
1	Ethernet	Data Frames	IP based
2	802.11	Data Frames, Management Frames	IP based
3	802.16	Data Frames, Management Frames	IP based
4	3GPP	Not Applicable. Requires protocol stack changes	IP based
5	3GPP2	Not Applicable. Requires protocol stack changes	IP based

#### 8.2.1 L2 Data Frames Packet Format

The data frame packet format is described in Figure 26 —. The frame can be used for wired 802 technologies such as ethernet and also other wireless 802 technologies such as 802.11 and 802.16. The above frame structure can also be used with a standard L3 protocol (UDP/TCP) with a well defined MIH port as well. The discovery of MIH Function entities at L3 is outside the scope of the standard.

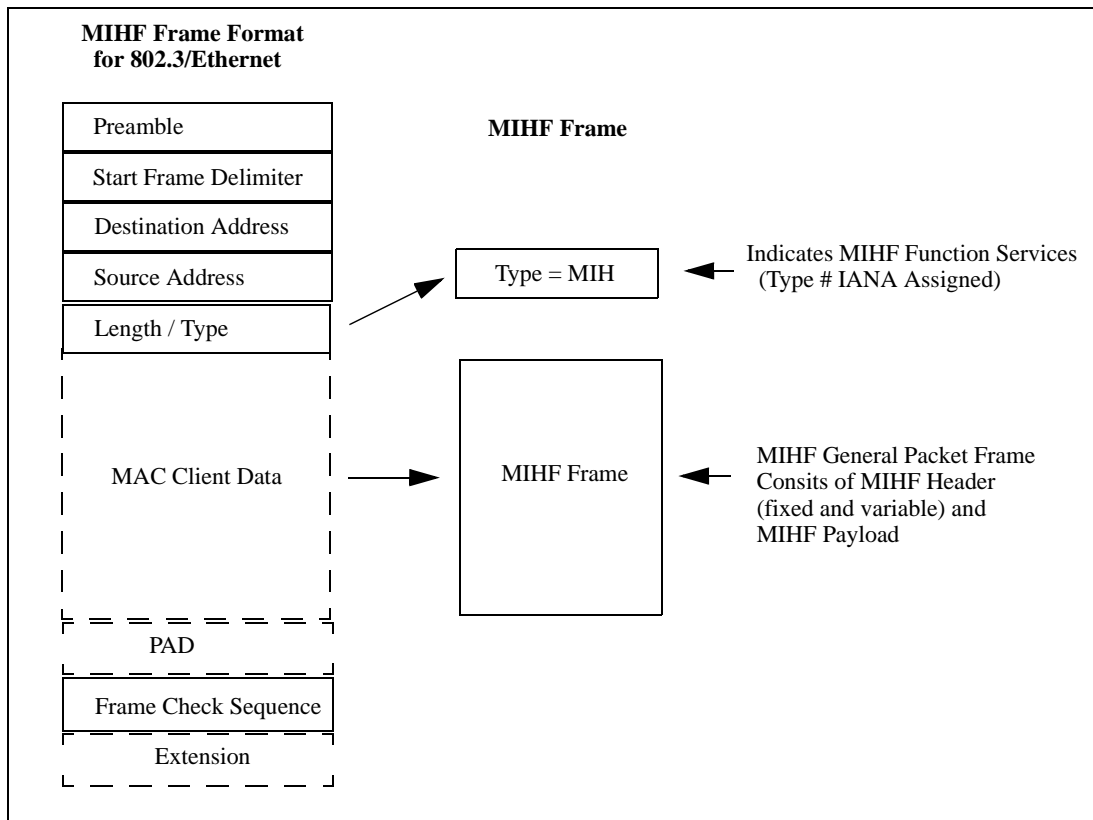

**Figure 26 — Common MIH Frame Format**

### 8.3 Description

The Media Independent Handover Protocol provides the following services:


[1] MIH capability discovery: MIHF in mobile terminal or MIHF in the network discovers which entity supports MIHF. Thereafter the peer MIH Functions negotiate/discover an optimum transport for communication. The MIH Function entities also discover list of supported events and commands. The MIH Function can also query the information schema for list of supported information elements.

[2] MIH remote registration: Remote MIHF in different entities can register with each other to receive Media Independent Handover Messages including remote MIES.

[3] MIH message exchange: MIHF can exchange MIH messages using MIH payload and MIH protocol over a suitable transport. As part of message exchange the peer MIH Function entities can use the MIES, MICS and MIIS for effective handovers.

The standard describes the MIH packet format, message formats, and the procedures for MIH message exchange to facilitate handover in a media independent manner. However, handover policy and handover decision making is outside the scope of the standard. Figure 27 — shows possible MIH message delivery and its relation with other protocol layers.


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

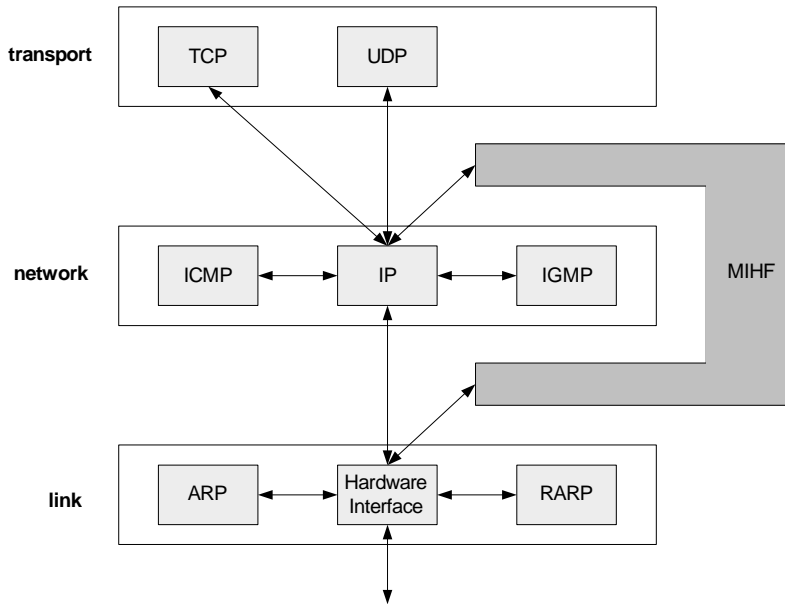

**Figure 27 — Interaction for MIHF- MIHF message exchange**

**8.3.1 MIH General Packet Format**

The MIH Function Header consists of a two parts; one with fixed length and another with variable length. The fixed length part of the header carries the essential information which is present in every packet and is important for parsing and analyzing the packet quickly. The variable length part of the header carries information which is optional in some cases.

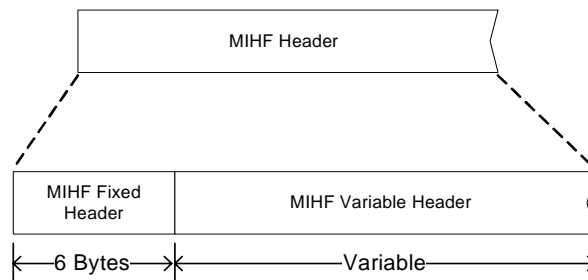

**Figure 28 — MIHF Header Format**


The MIHF header is split into two parts so as to introduce flexibility into the MIH Function protocol design. Please refer to Figure 28 —.

**8.3.1.1 MIHF Fixed Header**

This part of the header content is mandatory. The following table shows the contents of the fixed part of the header.

**Table 18—MIHF Fixed Header description**

Field Name	Size (bits)	Description
Version	4	This field is used to specify the version of protocol used. The importance of this is seen in downwards compatibility handling in the future.
Reserved	4	This field is intentionally kept reserved. In un-used case, it all the bits of this field are to be set to '0'.
MIHF Message ID (MID)	16	Combination of the following 3 fields.
-- Service Identifier (SID)	4	Identifies the different MIHF services, possible values are: 1: System Management 2: Event Service 3: Command Service 4: Information Service
-- Operation Code (Opcode)	3	Type of operation to be performed with respect to the SID, possible values are: 1: Request 2: Response 3: Indication
-- Action Identifier (AID)	9	This indicates the action to be taken w.r.t. the SID
Number of Additional Header Identifiers	8	Indicates the no. of header identifiers (TLV for each) included in the variable MIHF header part
Variable Load Length	16	Indicates the total length of the variable load embedded into the MIHF Function frame and is the sum of MIHF variable header length and MIHF payload length. MIHF fixed header length is NOT included.

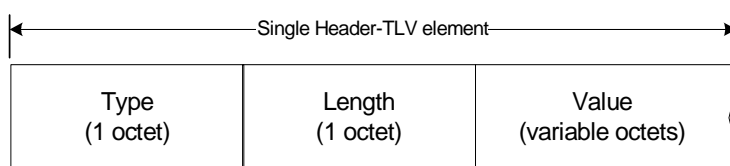**8.3.1.2 MIHF Variable Header****Figure 29 — MIHF Header TLV Format**

Within the MIHF header, additional identifiers are present that help to analyze and coordinate the payload is embedded. All of these identifiers are represented in Header-TLV format. The syntax of this TLV format is shown in Figure 29 —. The Type field indicates which type of header identifier is embedded in the Value field. Some possible values for the Type field are as follows.

- Transaction ID (to match requests and responses )
- MIHF Function ID / Session ID (to identify the communication peers)
- Synchronization Information (to identify the timestamp of the received message)

### 8.3.1.3 MIHF Frame Format

Figure 30 —shows the components of MIHF frame. Figure 31 — shows the detailed format of the MIHF Function frame.




Figure 30 — MIHF Frame

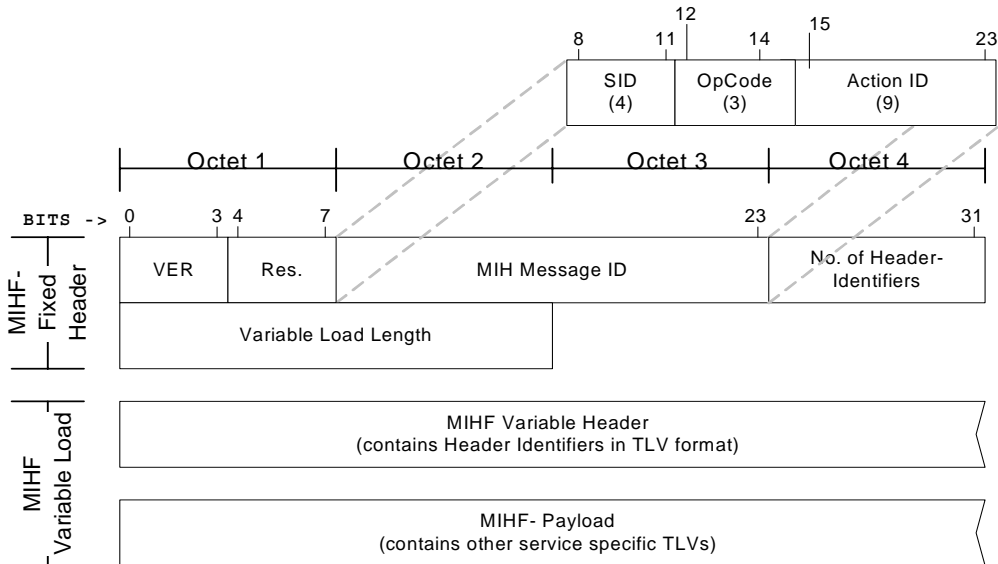


Figure 31 — MIHF Frame Format

### 8.3.2 MIH Function Messages

MIH Function messages are used to discover MIH Function capability in the peer MIH Function entities, register with peer MIHF entity and provide MIES, MICS and MIIS services to MIHF clients.

Table 19—MIH Function Messages

No	MIH Message Identifier	MIH Opcode	MIH Service ID
----	------------------------	------------	----------------

**Table 19—MIH Function Messages**

1	MIH Capability Discover	Request, Response	System Management
2	MIH Event Register	Request, Response	Event Service
3	MIH Event Deregister	Request, Response	Event Service
4	MIH Link Up	Indication	Event Service
5	MIH Link Down	Indication	Event Service
6	MIH Link Going Down	Indication	Event Service
7	MIH Link Detected	Indication	Event Service
8	MIH Link Parameters Report	Indication	Event Service
9	MIH Link Event Rollback	Indication	Event Service
10	MIH Link Handover Imminent	Indication	Event Service
11	MIH Link Handover Complete	Indication	Event Service
12	MIH Get Status	Request, Response	Command Service
13	MIH Switch	Request, Response	Command Service
14	MIH Configure	Request, Response	Command Service
15	MIH Configure Link Thresholds	Request, Response	Command Service
16	MIH Scan	Request, Response	Command Service
17	MIH Handover Initiate	Request, Response	Command Service
18	MIH Handover Prepare	Request, Response	Command Service
19	MIH Handover Commit	Request, Response	Command Service
20	MIH Handover Complete	Request, Response	Command Service
21	MIH Network Address Information	Request, Response	Command Service
22	MIH Get Information	Request, Response	Information Service

## 8.4 MIH Protocol Messages

This section specifies the MIH Function payload for different MIH Function messages. The payload consists of a set of identifiers in TLV (Type, Length, Value) form. The representation of identifiers for different messages in TLV form is shown in below sections.

## 8.4.1 Messages for System Management Service Category

MIH frames for System Management Service category have MIH Service ID set to 1. The MIH Function payload for different messages in this service category is described below.

### 8.4.1.1 MIH\_Capability\_Discover Request

This message may contain SupportedTransportList, SupportedEventList and SupportedCommandList in the MIH message data. If a requesting MIHF entity doesn't know the MIHF capable entity's addresses, requesting MIHF entity fills its source addresses and may broadcast this message. If a requesting MIHF entity knows the address of entity but doesn't know whether the entity is MIHF capable, this message is delivered to the entity in a unicast way.

### 8.4.1.2 MIH\_Capability\_Discover Response

This message may contain SupportedTransportList, SupportedEventList and SupportedCommandList, in the MIH message data. Only MIHF capable entity can receive MIH\_Capability\_Discover.request. Upon reception of MIH\_Capability\_Discover.request, MIH\_Capability\_Discover.response is transmitted. Destination addresses are copied from the MIH\_Capability\_Discover.request and source addresses are filled with its addresses. An entity with MIHF may also broadcast unsolicited MIH\_Capability\_Discover.response message to advertise its MIH capability.

Name	Type (1 octet)	Length (1 octet)	Value
SupportedEventList	1	Variable	Array of event codes formatted as messaged-id: Event Code1, Event Code2, Event Code3, ....
SupportedCommandList	2	Variable	Array of command codes formatted as messaged-id: Command Code1, Command Code2, Command Code3, ....
SupportedTransportList	3	4	Octet 1 specifies the transport option for the event service. Octet 2 specifies the transport option for the command service. Octet 3 specifies the transport option for the information service.  For each bit location a value of '1' indicates that the transport option is supported.  Bit #0: L2 Bit #1: L3 or higher layer protocol Bit #2~7: <i>Reserved</i>

## 8.4.2 Messages for EventService Category

MIH frames for Event Service category have MIH Service ID set to 2. The MIH Function payload for different messages in this service category is described below.

### 8.4.2.1 MIH\_Event\_Register Request

This message is used by remote MIH Function (the registrant) to register an interest in a particular or group of event types from a particular event origination point.

Name	Type (1 octet)	Length (1 octet)	Value
RequestedEventList	4	Variable	Array of event codes formatted as messaged-id: Event Code1, Event Code2, Event Code3, ....

### 8.4.2.2 MIH\_Event\_Register Response

The response indicates which of the event types were successfully registered.

Name	Type (1 octet)	Length (1 octet)	Value
ResponseEventList	5	Variable	Array of event codes formatted as messaged-id: Event Code1, Event Code2, Event Code3, ....

### 8.4.2.3 MIH\_Event\_Deregister Request

This message is sent by remote MIHF (the registrant) to deregister for a set of link layer events.

Name	Type (1 octet)	Length (1 octet)	Value
RequestedEventList	4	Variable	Array of event codes formatted as messaged-id: Event Code1, Event Code2, Event Code3, ....

### 8.4.2.4 MIH\_Event\_Deregister Response

The response indicates which of the event types were successfully deregistered.

Name	Type (1 octet)	Length (1 octet)	Value
ResponseEventList	5	Variable	Array of event codes formatted as messaged-id: Event Code1, Event Code2, Event Code3, ....

### 8.4.2.5 MIH\_Link\_Up Indication

This notification is delivered from MIHF in the PoA to MIHF in the network when a layer 2 connection is successfully established with mobile terminal.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
MacNewPoA	7	Variable	MAC Address of New PoA (AP)
MacOldAccessRouter	8	Variable	MAC Address of old Access Router (if any)
MacNewAccessRouter	9	Variable	MAC Address of new Access Router
IP_Renewal_Indicator	10	1	Indicates whether the MN shall change IP address in the new PoA. 0: Change in IP Address required 1: Change in IP Address NOT required
MobilityMgmtProtocol-Support	11	1	Indicates type of Mobility Management Protocol supported by the new PoA 0: Mobile IPv4 with FA (FA-CoA) 1: Mobile IPv4 without FA (Co-located CoA) 2: Mobile IPv6 3: Mobile IPv6 with DHCPv6 4: SIP

### 8.4.2.6 MIH\_Link\_Down Indication

This notification is delivered from MIHF in the PoA to MIHF in the network when a layer 2 connection is disconnected due to certain reason with mobile terminal.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
MacNewPoA	7	Variable	MAC Address of New PoA (AP)
MacOldAccessRouter	8	Variable	MAC Address of old Access Router (if any)
ReasonCode	12	1	Reason for why the link went down 0: RC_EXPLICIT_DISCONNECT ( [1] ) 1: RC_PACKET_TIMEOUT 2: RC_FAIL_NORESOURCE 3: 127: <i>Reserved</i> 128~255: RC_VENDOR_SPECIFIC

Note: Meaning of Reason code presented above is as following

[1] RC\_EXPLICIT\_DISCONNECT: The link is down because of explicit disconnect procedures initiated either by client or network

[2] RC\_PACKET\_TIMEOUT: The link is down because no acknowledgements were received for transmitted packets within the specified time limit.

[3] RC\_FAIL\_NORESOURCE: The link is down because there were no resources to maintain the connection

[4] RC\_VENDOR\_SPECIFIC: Vendor Specific reason code.

#### 8.4.2.7 MIH\_Link\_Going\_Down Indication

This message is transmitted to the remote MIHF when a layer 2 connectivity is expected (predicted) to go down (Link\_Down) within a certain time interval.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
MacNewPoA	7	Variable	MAC Address of New PoA (AP)
MacOldAccessRouter	8	Variable	MAC Address of old Access Router
MacNewAccessRouter	9	Variable	MAC Address of new Access Router
TimeInterval	13	2	Time Interval in which the link is expected to go down. The link connectivity is expected to be available at least for time specified by <i>TimeInterval</i> . Unit: 1ms
Confidence Level	14	1	The confidence level for link to go down within the specified time interval Expressed in percentage (0~100)
UniqueEventIdentifier	15	2	To be used in case of event rollback

#### 8.4.2.8 MIH\_Link\_Detected Indication

This message is transmitted to the remote MIHF when a new link has been detected.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
MIH Capability Flag	16	1	0: MIH Capability NOT supported 1: MIH Capability Supported
Link Identifier	17	Variable	Type of link
MacNewPoA	7	Variable	MAC Address of New PoA (AP)

### 8.4.2.9 MIH\_Link\_Parameters\_Report Indication

This message indicates changes in link parameters have crossed pre-configured threshold levels.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
LinkParameterType	18	Variable	Media specific parameter types that have crossed thresholds
oldValueOfLinkParameter	19	Variable	Specify the old value of link parameter
newValueOfLinkParameter	20	Variable	Specify the new value of link parameter

### 8.4.2.10 MIH\_Link\_Event\_Rollback Indication

This message is used in conjunction with Link\_Going\_Down. In case of Link\_Going\_Down if the link is no longer expected to go down in the specified time interval, the a Link\_Event\_Rollback message is sent to the remote Event destination.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
UniqueEventIdentifier	15	2	To be used in case of event rollback

### 8.4.2.11 MIH\_Link\_Handover\_Imminent Indication

This message indicates that a link layer handover decision has been made and it's execution is imminent.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
MacNewPoA	7	Variable	MAC Address of New PoA (AP)
MacOldAccessRouter	8	Variable	MAC Address of old Access Router
MacNewAccessRouter	9	Variable	MAC Address of new Access Router

### 8.4.2.12 MIH\_Link\_Handover\_Complete Indication

This message indicates that a link layer handover has been completed.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address
MacNewPoA	7	Variable	MAC Address of New PoA (AP)
MacOldAccessRouter	8	Variable	MAC Address of old Access Router

MacNewAccessRouter	9	Variable	MAC Address of new Access Router
--------------------	---	----------	----------------------------------

### 8.4.3 Messages for Command Service Category

MIH frames for CommandService category have MIH Service ID set to 3. The MIH Function payload for different messages in this service category is described below.

#### 8.4.3.1 MIH\_Get\_Status Request

This message is used to discover the status of currently available links.

Name	Type (1 octet)	Length (1 octet)	Value
GetStatusRequestSet	21	4	Set of identifiers for which status is requested  Bit #0: Network Types Bit #1: Device Information Bit #2: Operation Mode Bit #3: Channel Identifier Bit #4: Channel Quality Bit #5: Link Speed Bit #6: Battery Level Bit #7~31: <i>Reserved</i>

#### 8.4.3.2 MIH\_Get\_Status Response

This message is used by MIH Function to report the status of currently available links.

Name	Type (1 octet)	Length (1 octet)	Value
GetStatusRequestSet	21	4	Set of identifiers for which status was requested  Bit #0: Network Types Bit #1: Device Information Bit #2: Operation Mode Bit #3: Channel Identifier Bit #4: Channel Quality Bit #5: Link Speed Bit #6: Battery Level Bit #7~31: <i>Reserved</i>
GetStatusResponsetSet	22	Variable	Status for each of the identifiers included in Get-StatusRequestSet

### 8.4.3.3 MIH\_Switch Request

This message is used to switch an active session from one link to another.

Name	Type (1 octet)	Length (1 octet)	Value
HandoverMode	23	1	0: Make before break 1: Break before make
NewLinkIdentifier	24	Variable	The identifier of new network to which handover needs to be initiated
OldLinkIdentifier	25	Variable	The identifier of old network from which handover needs to be initiated
OldLinkAction	26	1	Specifies the suggested action on old link once the handover to new link has been completed. Combination of below choices are possible. 0: LINK_DISCONNECT 1:LINK_LOW_POWER 2:LINK_POWER_DOWN 3:LINK_NO_ACTION 4:LINK_RESOURCE_RETAIN 5:DATA_FORWARDING_REQUEST 6:BI_CASTING_REQUEST 7:HANDOVER_CANCEL

### 8.4.3.4 MIH\_Switch Response

This message returns the response of trying to switch an active session from one link to another.

Name	Type (1 octet)	Length (1 octet)	Value
SwitchResultCode	27	1	0: Success 1: Failure 2: Rejected

### 8.4.3.5 MIH\_Configure Request

This message is used to configure the link and control the link behavior.

Name	Type (1 octet)	Length (1 octet)	Value
------	-------------------	---------------------	-------

ConfigureRequestSet	28	4	Set of identifiers which can be used to configure the link  Bit #0: Network Types In Use Bit #1: Operation Mode Bit #2: Transmitter Status Bit #3: Current Address Bit #4~31: <i>Reserved</i>
ConfigureReqSetParameters	29	Variable	Configuration values of different parameters

#### 8.4.3.6 MIH\_Configure Response

This message is used to configure the link and control the link behavior.

Name	Type (1 octet)	Length (1 octet)	Value
ConfigureStatus	30	1	Status of configuring different parameters. 0: Success 1: Failure 2: Rejected

#### 8.4.3.7 MIH\_Scan Request

This message is used to scan a list of PoAs for a specific link type.

Name	Type (1 octet)	Length (1 octet)	Value
ScanLinkType	31	Variable	Identifier of link for which to scan

#### 8.4.3.8 MIH\_Scan Response

This message returns the list of PoAs for a specific link type after a scan operation.

Name	Type (1 octet)	Length (1 octet)	Value
ScanLinkType	31	Variable	Identifier of link for which scan was conducted
ScanResponseSet	32	Variable	List of PoAs for the specified link type

#### 8.4.3.9 MIH\_Configure\_Thresholds Request

This message is used to configure the thresholds for indications from link layer.

Name	Type (1 octet)	Length (1 octet)	Value
------	-------------------	---------------------	-------

LinkParameter	33	2	Parameters for which link thresholds need to be set. Bit 0: Link speed Bit 1: Link bit error rate Bit 2: Link frame loss rate before retransmission Bit 3: Link signal strength Bit 4~15: Reserved
InitiateActionThreshold	34	Variable	LinkParameter specific threshold value that may cause upper layers to start "setup" type activities
RollbackActionThreshold	35	Variable	LinkParameter specific threshold value that may cause upper layers to rollback previously started setup type activities
ExecuteActionThreshold	36	Variable	LinkParameter specific threshold value that may cause upper layers to "execute" appropriate handover specific action

#### 8.4.3.10 MIH\_Configure\_Thresholds Response

This message returns the response of configuring thresholds for link indications.

Name	Type (1 octet)	Length (1 octet)	Value
ConfigureThresholdResult-Code	37	Variable	Status of configuring different thresholds. 0: Success 1: Failure 2: Rejected

#### 8.4.3.11 MIH\_Handover\_Initiate Request

This message is used for communication between MIH Function on client with MIH Function on network. The function is used to communicate intent of handover initiation. The handover can be initiated either by the client or the network.

Name	Type (1 octet)	Length (1 octet)	Value
SuggestedNewLinkIdentifier	24	Variable	This is the identifier of new network to which handover needs to be initiated.
SuggestedMACNewPoAIdentifier	7	Variable	This is the preferred Point of Attachment (AP/BS) on new network
HandoverMode	23	1	The handover mode may influence the manner in which links are prepared for handover 0: Make-before_Break 1: Break-before-Make

CurrentLinkAction	26	1	Specifies suggested action on old link once handover procedures have been executed. LINK_DISCONNECT LINK_LOW_POWER LINK_POWER_DOWN LINK_NO_ACTION
-------------------	----	---	---

#### 8.4.3.12 MIH\_Handover\_Initiate Response

This message is used for communication between MIH Function on client with MIH Function on network. The function is used to communicate response of intent of handover initiation. The handover can be initiated either by the client or the network.

Name	Type (1 octet)	Length (1 octet)	Value
HandoverAck	27	1	Result of Handover Request 0: Initiate Handover 1: Abort Handover
PreferredLinkIdentifier	28	Variable	The identifier of new network to which handover needs to be initiated
PreferredPoAIdentifier	29	Variable	MAC Address of preferred PoA on new network
AbortReason	30	1	Specifies the reason for aborting the handover.

#### 8.4.3.13 MIH\_Handover\_Commit Request

This message is used by MIH Function to communicate the intent to commit to a handover request to a specific link and PoA.

Name	Type (1 octet)	Length (1 octet)	Value
NewLinkIdentifier	24	Variable	The identifier of new network to which handover needs to be initiated
NewPoAMAC	7	Variable	MAC Address of preferred PoA on new network
CurrentLinkAction	26	1	Specifies the suggested action on old link once the handover to new link has been completed. Combination of below choices are possible. 0: LINK_DISCONNECT 1: LINK_LOW_POWER 2: LINK_POWER_DOWN 3: LINK_NO_ACTION 4: LINK_RESOURCE_RETAIN 5: DATA_FORWARDING_REQUEST 6: BI_CASTING_REQUEST 7: HANDOVER_CANCEL

#### 8.4.3.14 MIH\_Handover\_Commit Response

This message is used by MIH Function to communicate the response of request to commit to a handover request to a specific link and PoA.

Name	Type (1 octet)	Length (1 octet)	Value
OldLinkAction	26	1	Specifies the suggested action on old link once the handover to new link has been completed. Combination of below choices are possible. 0: LINK_DISCONNECT 1:LINK_LOW_POWER 2:LINK_POWER_DOWN 3:LINK_NO_ACTION 4:LINK_RESOURCE_RETAIN 5:DATA_FORWARDING_REQUEST 6:BI_CASTING_REQUEST 7:HANDOVER_CANCEL

#### 8.4.3.15 MIH\_Handover\_Complete Request

This message is used by MIH Function to communicate the status of handover operation. If the handover operation is successful the serving PoA can now start forwarding packets to target PoA.

Name	Type (1 octet)	Length (1 octet)	Value
HnadoverStatus	31	1	Specifies the status of handover request. Combination of below choices are possible. 0: Success 1:Link Setup Failure 3-7: Reserved

#### 8.4.3.16 MIH\_Handover\_Complete Response

This message is used by MIH Function to communicate the response to completion of handover operation. The message is basically used to communicate the preferred action to be taken w.r.t resources associated with previous connection. If the handover is successful the resources may be released.

Name	Type (1 octet)	Length (1 octet)	Value
ResourceStatus	32	1	Specifies the preferred action w.r.t resource retention request associated with previous connection. 0: Release resources 1: Retain resources

### 8.4.3.17 MIH\_Network\_Address\_Information\_Request

The 'MIH\_Network\_Address\_Information.request' is delivered from one MIHF in the network to another MIHF in the network in order to discover mobile terminal's network address related information before handover. Upon reception of this message, the receiving remote MIHF can either interact with upper layer to achieve enough information or further deliver this message to the MIHF which may have enough information on this message.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address of Mobile Terminal
Home Address	33	4 or 6	Home IP address of Mobile Terminal
CoA	34	4 or 6	Care of Address of Mobile Terminal
Serving FA Address / Serving Access Router Address	35	4 or 6	In case of Mobile IPv4, this parameter represents "IP address of old Foreign Agent, and in case of Mobile IPv6, this parameter represents IP address of old Access Router.

### 8.4.3.18 MIH\_Network\_Address\_Information\_Response

This is sent as a response to MIH\_Network\_Address\_Information.request.

Name	Type (1 octet)	Length (1 octet)	Value
MacMobileTerminal	6	Variable	MAC Address of Mobile Terminal
Home Address	33	4 or 6	Home IP address of Mobile Terminal
FA Address / Access Router Address	35	4 or 6	In case of Mobile IPv4, this parameter represents "IP address of Foreign Agent, and in case of Mobile IPv6, this parameter represents IP address of Access Router.
Network Address Information	36	Variable	In case of Mobile IPv4, Agent Advertisement is encapsulated and in case of Mobile IPv6, Router Advertisement is encapsulated.

## 8.4.4 Messages for Information Service Category

MIH frames for Information Service category have MIH Service ID set to 4. The MIH Function payload for different messages in this service category is described below.

### 8.4.4.1 MIH\_Get\_Information\_Request

This message is used by MIH Function to retrieve value of different Information Elements.

Name	Type (1 octet)	Length (1 octet)	Value
------	-------------------	---------------------	-------

InfoQueryType	37	1	Specifies the different types of supported IE formats. 1: TLV 2: RDF_DATA 3: RDF_SCHEMA_URL 4: RDF_SCHEMA
InfoQueryParameters	38	Variable	List of query specific parameters

#### 8.4.4.2 MIH\_Get\_Information Response

This message is used by MIH Function to retrieve value of different Information Elements.

Name	Type (1 octet)	Length (1 octet)	Value
InfoQueryType	37	1	Specifies the different types of supported IE formats. 1: TLV 2: RDF_DATA 3: RDF_SCHEMA_URL 4: RDF_SCHEMA
InfoQueryResponse	39	Variable	Includes the values of different IEs corresponding to the query request
QueryStatus	40	1	Status of the query operation 0: Success 1: Failure 2: Rejected

## 8.5 Protocol Flow

### 8.5.1 MIH Capability Discovery

The network entities and the terminals with MIHF shall discover which entity supports MIHF in order to utilize MIHF for media independent handover. MIH capability discovery can be done through media specific broadcast messages or through on demand MIH capability discovery messages.

#### 8.5.1.1 MIH Capability Discovery through media specific broadcast messages

The network may be able to indicate to the mobile terminal if it is MIH capable by broadcasting MIH capability over the medium, e.g. beacon in 802.11 and DL-MAP in 802.16.

#### 8.5.1.2 On Demand MIH Capability Discovery

The MIH Function in mobile terminal or in the network can discover which entity in the network or which mobile terminal supports MIH capability by using MIH capability discovery procedure. MIH capability discovery procedure consists of capability discovery handshake and capability advertisement. MIH Function capability discovery can be achieved by exchanging MIH messages, MIH\_Capability\_Discover request and MIH\_Capability\_Discover response. The MIH Function entity may advertise its MIH capability to the neighbors by broadcasting MIH\_Capability\_Discover.response message. Figure 32 — shows the on demand MIH capability discovery procedure.

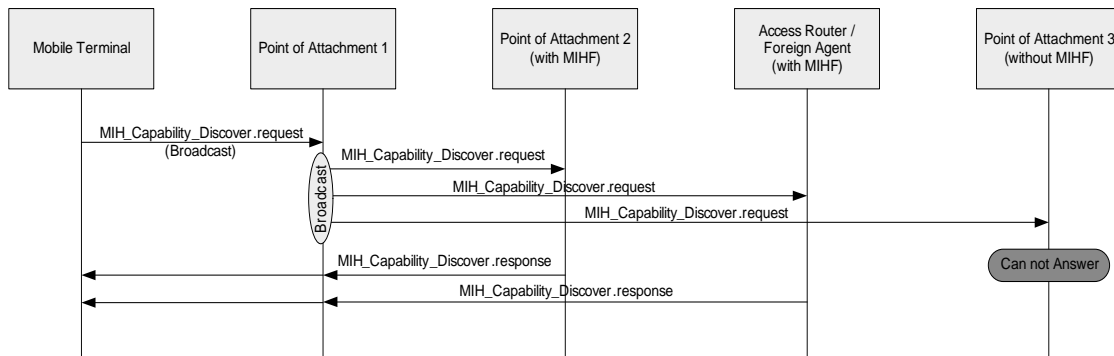


Figure 32 — On demand MIH capability discovery procedure

# Annexes

## Annex A-1

(informative)

### Handover Procedures

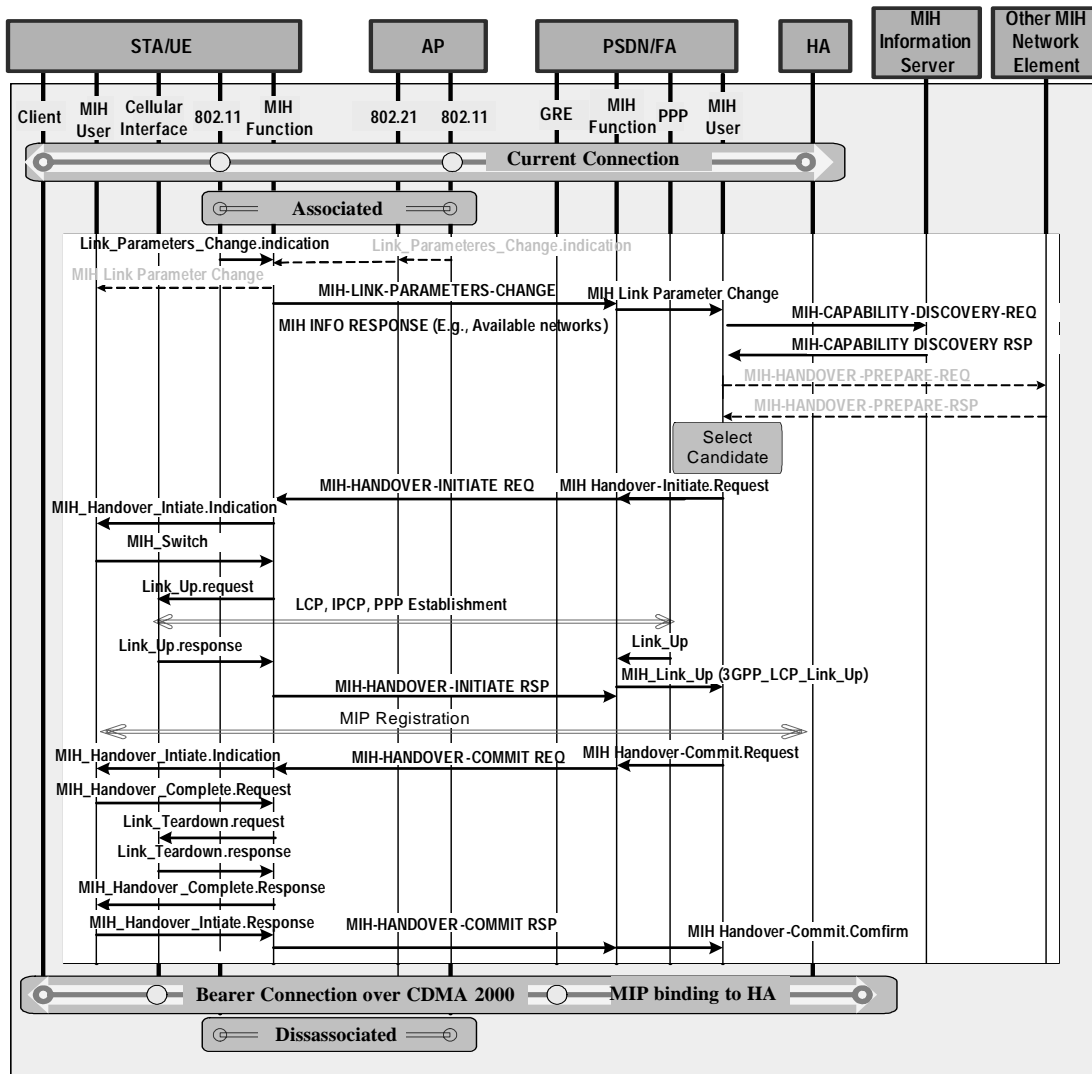


Figure 33 — Handover from 802.11 to 3GPP2

The following steps describe the flow depicted in Figure 33 —.

- 1) The UE is associated to an 802.11 AP and there is currently a session established through the corresponding Home Agent
- 2) An IEEE 802.21 Link Parameter change event is triggered due to E.g., undesirable radio conditions. The MIH function notifies the MIH user through a corresponding MIH Link Parameter Change message. The MIH might also notifies the local MIH User. This is illustrated with the dotted arrow.
- 3) The MIH Function notifies the MIH Peer at the network (which previously register for the event service) indicating that a Link Parameter Change has been triggered. The MIH user can optionally contact the MIH Information Server through an MIH Capability Discovery Request to query about the available network for the user that generated the event. Note that this information could have been previously obtained of it could be readily available within the network entity where the MIH user resides.
- 4) The MIH user might use a Handover Prepare message in order to request resource from alternate networks.
- 5) The MIH user selects a candidate based on the information received in through the relevant MIH event indication. How this is done is out of scope of the 802.21 specification
- 6) The MIH user generates a Handover Initiate Request toward its local MIH Function. In turn, the local MIH Function contacts its peer at the STA/UE to transfer the MIH Handover Initiate message. E.g., over a layer 3 transport using the MIH Protocol. The remote MIH Function at the UE relay the MIH Handover Initiate Request, using an MIH Handover.Indication primitive.
- 7) The MIH User issues an MIH Switch.Request towards its local MIH Function to initiate the establishment of a new radio connection according to the information received in the MIH Handover Initiate Message.
- 8) The MIH Function issues an Link Up request (Note to theEditor, please note that this command needs to be added to the relevant Link Technology if not already available).
- 9) The 3GPP2 network interface establishes a new radio connection and a new PPP session.
- 10) The cellular interface responds indicating the radio link is up.
- 11) An MIH Handover Initiate.Response message is sent to the requesting MIH User indicating the successful establishment of the new radio connection. Note that the MIH User might have direct access to the relevant cellular technology. This is however out of the scope of this specification. Note that the establishment of the PPP session might trigger a Link Up event at the network side.
- 12) Mobil IP registration might be now trigger.
- 13) An MIH Handover Commit message is sent to MIH User indicating the successful establishment of the new radio connection.
- 14) The MIH User can now tear down the connection using an MIH complete request. side
- 15) A Link Tear Down is use to release resources.
- 16) A Link Tear Down response is issue indicating success release of resources.
- 17) An MIH Handover Complete response is issue notifying the user of successful release of resources.
- 18) An MIH Initiate Response can now be issue toward the peer.
- 19) The session is now transferred toward the new link layer
- 20) The UE is disassociated from the previous PoA

## Annex A-2 (informative)

Table 20—MIH-3GLINK\_SAP Primitives

3GPP Layer	3GPP Service Primitive Descriptions	3GPP Primitive	802.21 Service Primitive
RR	Page received by RR layer	GMRR-PAGE	Link Parameter Change
	Successful reception of data supporting specific QoS	GRR-DATA	Link Parameter Change
LLC	Peer LLC layer is established	LL-ESTABLISH	Link Up/Link Parameter Change
	Peer LLC layer is released	LL-RELEASE	Link Going Down/Link Parameter Change
	LLC Layer unrecoverable error	LL-STATUS	Link Down
GMM	Station is attached	GMMREG-ATTACH	Link Parameter Change
	Station is detached	GMMREG-DETACH	Link Parameter Change
SM	Data session active	SMSM-ACTIVE	Link Up/Link Parameter Change/ Handover Initiate/ Handover Prepare
	Data session is deactivated	SMSM-DEACTIVATE	Link Down/Link Parameter Change/Handover Switch
	Data session modified	SMSM-MODIFY	Link Parameter Change
	Data session terminated due to unrecoverable error	SMSM-STATUS	Link Down
	PDP Context is active	SMREG-PDP-ACTIVATE	Link Up/Handover Complete/ Parameter Change/ Handover Complete
	PDP Context is modified	SMREG-PDP-MODIFY	Link Up/Parameter Change/ Handover Complete
	PDP Context is deactivated	SMREG-PDP-DEACTIVATE	Link Going Down/Link Down

Table 20—MIH-3GLINK\_SAP Primitives

3GPP Layer	3GPP Service Primitive Descriptions	3GPP Primitive	802.21 Service Primitive
GMM/SM (NAS)	Station is attached	GMMREG-ATTACH	Parameter Change
	Station is detached	GMMREG-DETACH	Parameter Change
	PDP Context is active	SMREG-PDP-ACTIVATE	Link Up/Handover Complete/ Parameter Change/Handover Initiate/Handover Prepare
	PDP Context is modified	SMREG-PDP-MODIFY	Parameter Change/ Link Up
	PDP Context is deactivated	SMREG-PDP-DEACTIVATE	Link Down/Link Parameter Change
	Radio Access Bearer is activated for data transfer	RABMSM-ACTIVATE	Link Up/Parameter Change/ Handover Complete
	Radio Access Bearer is deactivated for data transfer	RABMSM-DEACTIVATE	Link Down/Link Parameter Change
	Radio Access Bearer is modified for data transfer	RABMSM-MODIFY	Parameter Change/ Link Up/ Handover Complete
Radio Access Bearer data transfer error	RABMSM-STATUS	Link Down	

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

Table 20—MIH-3GLINK\_SAP Primitives

3GPP Layer	3GPP Service Primitive Descriptions	3GPP Primitive	802.21 Service Primitive
RRC (AS)	Radio Access Bearer has been activated	RABMAS-RAB-ESTABLISH	Link Up/ Handover Initiate/ Handover Complete
	Radio Access Bearer has been released	RABMAS-RAB-RELEASE	Link Down
	AS failure Indication	RABMAS-STATUS	Link Down
	Information regarding geographical area.	Information Broadcast	Parameter Change/Information Request/Information Response
	Notification of paging for particular user or terminal	Paging Request	Parameter Change
	Notification for all users	Notification Broadcast	Parameter Change
	Notification information for a specific or for many user	Notification Indication	Parameter Change
	UE initiated connection establishment	Connection Establishment	Link Up
	Network initiated connection release	IF Initiated Connection Release	Link Down
	Network initiated Radio Access Bearer Establishment	IF Side Initiated Radio Access Bearer Establishment	Link Up/Link Detected
	Network initiated Radio Access Bearer Release	IF Side Initiated Radio Access Bearer Release	Link Down
	Indication that the connection might be aborted unless streamlining is done	Streamlining Require Indication	Link Going Down
	Location information provided by the network for a specific UE	UE location information	Parameter Change
Connection loss indications	Connection loss indication	Link Down	
E-UTRAN/ E-CORE*	The location of the UE is now known by the network	LTE-detached	Parameter Change
	The UE is known to the network but no transport channel is established	LTE-idle	Parameter Change/Link Down
	Radio resources have been established and the UE is able to perform uplink and downlink transport of PDU	LTE-Active	Link Up/Link Handover Complete

**Table 20—MIH-3GLINK\_SAP Primitives**

<b>3GPP Layer</b>	<b>3GPP Service Primitive Descriptions</b>	<b>3GPP Primitive</b>	<b>802.21 Service Primitive</b>
3GPP2 LAC	L3 is notified of a relevant event detected at Layer 2. E.g., an abnormal condition	L2.Condition.Notification	Link-Up/Link Down/Link Going Down
	Reception of the specified SDU was acknowledge at L2	L2.Data.Confirm	Handover Complete
	L2 executes a control command as directed by L3	L2.Supervision.Request	Handover Initiate

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

## Annex A-3 (informative)

**Table 21—Mapping MIH Primitives to Reference Points**

No	MIH Message Identifier	Operation code	Category	Reference Point
1	MIH Capability Discover	Request, Response	System Management	R1, R3
2	MIH Event Register	Request, Response	Event Service	R1, R3
3	MIH Event Deregister	Request, Response	Event Service	R1, R3
4	MIH Link Up	Indication	Event Service	R1, R3
5	MIH Link Down	Indication	Event Service	R1, R3
6	MIH Link Going Down	Indication	Event Service	R1, R3, R2
7	MIH Link Event Rollback	Indication	Event Service	R1, R3
8	MIH Link Parameters Report	Indication	Event Service	R1, R3
9	MIH SDU Transmit Status	Indication	Event Service	Local only
10	MIH Link Handover Imminent	Indication	Event Service	R1, R3, R2
11	MIH Link Handover Complete	Indication	Event Service	R1, R3
12	MIH Poll/Get Status	Request, Response	Command service	R1, R3, R2
13	MIH Switch	Request, Response	Command service	R1, R3
14	MIH Configure	Request, Response	Command service	R1, R3
15	MIH Scan	Request, Response	Command service	R1, R3
16	MIH Link Event Configure Thresholds	Request, Response	Command service	R1, R3
17	MIH Handover Initiate	Request, Response	Command Service	R1, R3
18	MIH Handover Prepare	Request, Response	Command Service	R1, R3, R5
19	MIH Handover Commit	Request, Response	Command Service	R1, R3
20	MIH Handover Complete	Request, Response	Command Service	R1, R3, R5
21	MIH Network Address Information	Request, Response	Command Service	R5
22	MIH Get Information	Request, Response	Information service	R1, R3
....	....		....	
23+	Reserved		Reserved	

## Annex A-4

The table below lists the Type identifier values for different individual IEs and also for Type identifiers corresponding to pre-defined Report formats.

**Table 22—Type identifiers for Information Elements**

No	Type	Identifier	Comments
1	TYPE_IE_LIST_OF_NETWORKS	0x10000001	
2	TYPE_IE_NUMBER_OF_OPERATORS	0x10000002	
3	TYPE_IE_LIST_OF_OPERATORS	0x10000003	
4	TYPE_IE_OPERATOR_IDENTIFIER	0x10000004	
5	TYPE_IE_NUMBER_POAS	0x10000101	
6	TYPE_IE_ROAMING_PARTNERS	0x10000102	
7	TYPE_IE_COST	0x10000103	
8	TYPE_IE_NETWORK_SECURITY	0x10000104	
9	TYPE_IE_NETWORK_QOS	0x10000105	
10	TYPE_IE_POA_ADDRESS	0x10000201	
10	TYPE_IE_POA_LOCATION	0x10000202	
11	TYPE_IE_DATA_RATE	0x10000203	
12	TYPE_IE_MAC_TYPE	0x10000204	
13	TYPE_IE_PHY_TYPE	0x10000205	
14	TYPE_IE_CHANNEL_RANGE	0x10000206	
16	TYPE_IE_POA_CAPABILITIES	0x10000207	
16	TYPE_IE_SUBNET_INFORMATION	0x10000208	
17	TYPE_REPORT_GENERAL_INFORMATION	0x100000FF	
18	TYPE_REPORT_ACCESS_NETWORK	0x100001FE	
19	TYPE_REPORT_ALL_ACCESS_NETWORKS	0x100001FF	
20	TYPE_REPORT_POA	0x100002FF	

## Annex B (informative)

### B.1 Media Independent Neighbor Graphs (An Example)

Neighbor graph is a network graph that connects a set of vertices (network PoAs) and a set of edges (a path between two PoAs) around a station's (MN) location. It is a way of representing neighborhood information. In case of homogeneous networks, network PoAs are of the same kind while for heterogeneous networks they are different. Media independent neighbor graph (MING) consists of homogeneous and heterogeneous network elements. In that sense media independent neighbor graph is a superset of all media specific neighbor graphs. Stations can obtain media specific neighbor graph information directly from the access networks. However, it is limited by the media the stations are currently attached to. 802.21 media independent neighbor information on the other hand can help obtain a global view of the network neighbor graph consisting of multiple media types.

Thus MING contains a set of different types of neighbors relative to a given PoA. This set can be kept by the MIIS functional entity and can eventually help a MN to identify quickly the potential candidate PoAs for handover. MING may also serve other purposes. For example, if a multi-mode MN knows (via MING) that some modes may not be supported by the neighboring access networks, the MN may like not to power up (for power management) the respective radio interfaces and then scan for neighbor information. A graphical representation of MING is shown in Figure 34 —. The graph contains a set of media independent information elements.

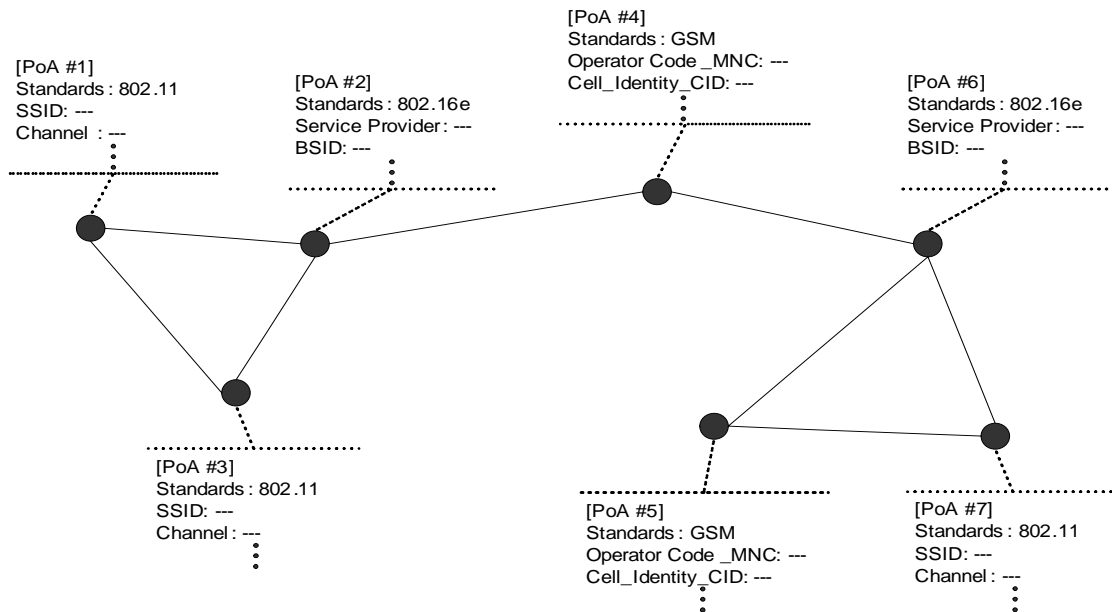


Figure 34 — An Example Representation of Media Independent Neighbor Graph (MING)

A MING may be manually configured, e.g., manually listing the neighbors for a given AP, or obtained via the management interface, or other access networks. Rather than incurring such management overhead, the


PoA can learn its neighbors of other media type dynamically through the course of report/response message exchanges. However, how this information is reported and the corresponding responses are outside the scope of the standard. A neighbor information element shall only contain entries of neighboring PoAs that are legitimate neighbors relative to a given PoA satisfying the query. A MING should also prevent the addition of bogus neighbors. The exact form of the implementation of MING is vendor dependent and outside the scope of the standard, however, a dynamic mechanism to construct and maintain MING is described in Appendix 11.2. A MING query may also be performed to obtain the neighbor information. In such cases, neighbor information IE is used in the neighbor information query. The format of the neighbor information map is described in Appendix.

Media Independent Neighbor Graph (MING) is a way to represent the MIIS neighborhood information. MING contains the pertinent information on a set of different types' neighbors that are candidates to which STAs can handover. This MING is compiled by the MIIS entity in the network side and can include information from measurement reports sent by STAs who successfully performed heterogeneous handovers, as well as the information via the management interface.

MING can be defined as a set of MING vertices and a set of MING edges representing a binary relation between MING vertices.

- MING vertex: A PoA with a list of information elements related with the PoA.
- MING edges: The neighboring relationship between two PoAs. Two PoAs *i* and *j* are neighbors if there exists a path of motion between *i* and *j* such that it is possible for a mobile MN to perform a handover successfully. For example, if a mobile MN can successfully handover from 802.11 AP1 to a cellular BS2, AP1 and BS2 are neighbors and (AP1, BS2) is a MING Edge.

If a MN is anticipating handover, it might request information service from MIIS entity at network side. Whenever receiving such a request, MIIS entity at network side should reply with a partial set of MING. The partial set shall only contain entries of neighboring PoAs with legitimate relationship of the PoA the MN now makes a connection to. If supported, unsolicited advertisement can be used for distributing the partial set as well. Figure 35 — describes the partial set of MING, which can be obtained when a MN requests neighboring information while connecting to PoA #2.

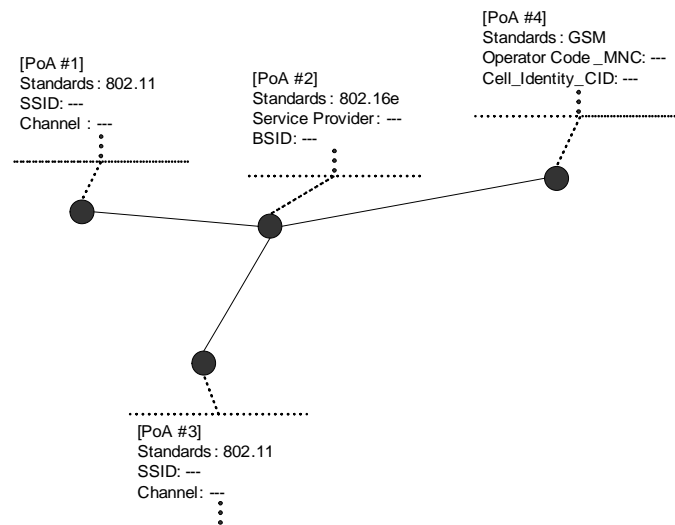

**Figure 35 — Partial Set of MING**

## B.2 Management of Neighboring Network Information

Two PoAs directly connected in MING represents the neighboring relationship. That is to say, a MN can handover between the two PoAs if MING contains a MING edge between the two PoAs. In most cases, this neighboring network information is manually managed by an administrator. Such manual administration is effective if the topology of network is almost fixed and hardly changes. However, some network systems have inherent feature that their topology is a little dynamic. In such network system, the quality of MING can decrease by topology change of existing PoAs. When a PoA is taken away, all the edges to the PoA should be evicted due to their inactivity. If a directional antenna is equipped with a PoA, the change of direction of the antenna may lead the eviction. So, this section describes a dynamic method to construct or manage MING.

Each MING vertex or edge might be managed based on a given timer. Whenever getting a report about a PoA's existence or a neighboring relation from STAs, MIIS entity at network side should add a MING vertex (or edge) or refresh the existing one. If no MN reports the same MING vertex (or edge) during a given time, the corresponding one is deleted. The information elements of the deleted MING vertex can be stored in a temporal storage to re-use them when the corresponding MING vertex is again added.

A 802.21-compatible MN is recommended to send a report message to MIIS entity at network side. This can occur after any successful handover. This implies that MING vertex (or edge) is created only if roaming agreement is satisfied, when MN handovers between two PoAs within a managed operator's network. If supported, the report message can be required by the network. Whatever mechanisms, such a report message itself should be verified.

The following section defines the primitives for supporting the dynamic management of neighboring network information

## B.3 MING POA Report

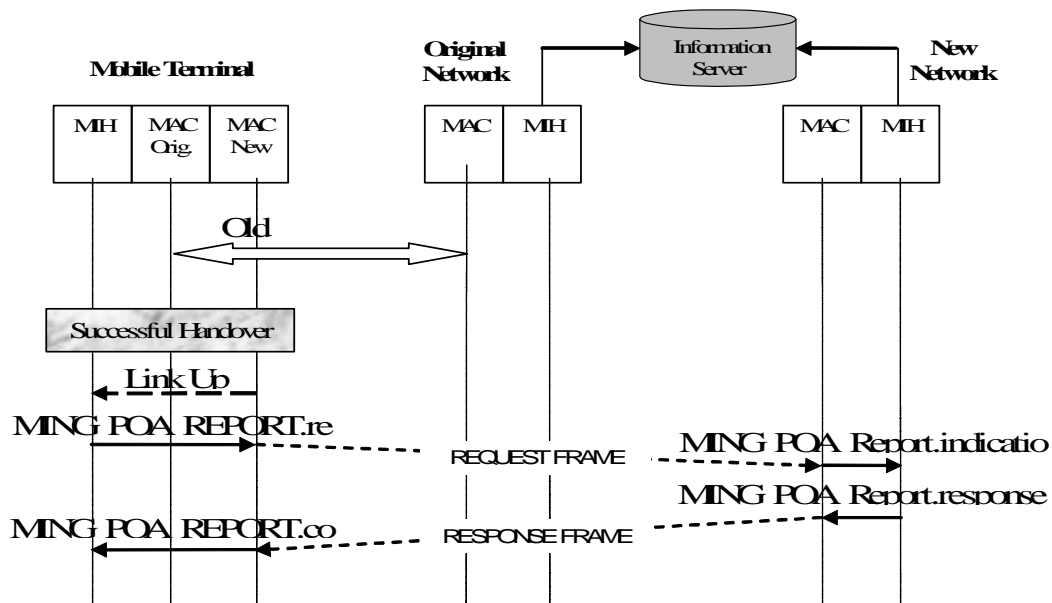


Figure 36 — MING POA Report

## B.4.1 MING\_POA\_Report.request

### B.4.1.1 Function

This primitive is used by MN's MIH to report the discovered PoAs to MIIS entity at network side. This primitive requests that a MING\_POA\_REPORT be sent to the MIIS with which the MN is associated.

### B.4.1.2 Semantics of service primitive

MING\_POA\_Report.request

```
(
    Current PoA,
    MING_POA_REPORT,
    Neighbor Status,
)
```

Name	Type	Valid Range	Description
Current PoA		N/A	Current PoA the sending MN makes a connection with
MING_POA_REPORT		N/A	Discovered PoAs and the related ANI, LLI, and HLSI found.
Neighbor Status	Yes / Don't know yet	N/A	For the PoA known after successful handover, the Neighbor Status is "Yes"  For the PoA discovered anyhow at any time (except handover), the Neighbor Status is "Don't know yet"

[Note: MING\_POA\_REPORT is not yet clear.]

### B.4.1.3 When generated

This primitive is generated by MN's MIH to report the discovered PoAs to MIIS entity at the network side.

### B.4.1.4 Effect on receipt

On receipt of this primitive, the management entity constructs a MING POA Report Request message. The MN then attempts to transmit this to the MIIS entity with which it is associated at the network side.

## B.4.2 MING\_POA\_Report.confirm

### B.4.2.1 Function

1 This primitive reports the result of a MING\_POA\_REPORT.  
2  
3

#### 4 B.4.2.2 Semantics of service primitive

5  
6 MING\_POA\_Report.confirm  
7  
8 (   
9     resultCode,  
10     MING Vertex Set,  
11     )  
12  
13

#### 14 B.4.2.3 When generated

17 Name	18 Type	19 Valid Range	20 Description
21 ResultCode	22 Enumeration	23 SUCCESS, 24 INVALID_PAMAMETERS, 25 REFUSED, 26 TIMEOUT, 27 TRANSMISSION_FALIURE, 28 UNSPECIFIED_FALILURE	29 Indicates the result of the cor- 30 responding 31 MING_POA_Report.request
32 MING Vertex Set		33 N/A	34 A set of MING Vertexes being 35 reported. Only present if 36 ResultCode = SUCCESS

37 This primitive is generated by MN's management entity as a result of an MING\_POA\_Report.request and  
38 indicates the result of the request.  
39

#### 40 B.4.2.4 Effect on receipt

41 On receipt of this primitive, the ResultCode may be evaluated and the reported data may be used.  
42  
43

### 44 B.4.3 MING\_POA\_Report.indication

#### 45 B.4.3.1 Function

46 This primitive indicates that an MING\_POA\_Report was received from a MN. It is valid only at an MIH  
47 capable AP.  
48

#### 49 B.4.3.2 Semantics of service primitive

50 MING\_POA\_Report.indication  
51  
52 (   
53     PeerSTAAddress,  
54     Neighbor Status,  
55     )  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

Name	Type	Valid Range	Description
PeerSTAAddress	MACAddress	Any valid individual MAC Address	The address of the MN from which a MING_POA_Report was received.
Neighbor Status	Yes / Don't know yet	N/A	For the PoA known after successful handover, the Neighbor Status is "Yes"  For the PoA discovered anyhow at any time (except handover), the Neighbor Status is "Don't know yet"

#### B.4.3.3 When generated

This primitive is generated when a valid PoA report is received at the network side.

#### B.4.3.4 Effect on receipt

On receipt of this primitive, MIIS entity at network side tries to update its MING. If Neighbor Status is "Yes", it should also update the neighboring relationship between the Current PoA and the reported PoA.

### B.4.4 MING\_POA\_Report.response

#### B.4.4.1 Effect on receipt

This primitive is generated in response to an MING\_POA\_Report.indication reporting the result of an MING POA REPORT to the peer-MN.

#### 20.0.0.1 Semantics of service primitive

##### B.4.4.2 Semantics of service primitive

```
(
    PeerSTAAddress,
    ResultCode,
    MING Vertex Set,
)
```

Name	Type	Valid Range	Description
PeerSTAAddress	MACAddress	Any valid individual MAC Address	The address of the MN from which a MING_POA_Report was received.

1 2 3 4 5 6 7 8 9	ResultCode	Enumeration	SUCCESS, INVALID_PAMAMETERS, REFUSED, TIMEOUT, TRANSMISSION_FALIUR E, UNSPECIFIED_FALILURE	Indicates the result of the correspond- ing MING_POA_Report.indication
10 11 12 13 14	MING Vertex Set		N/A	A set of MING Vertexes being reported. Only present if ResultCode = SUCCESS

#### 15 B.4.4.3 When generated

17 This primitive is generated by the network in response to an MING\_POA\_Report.indication. If the returned  
18 ResultCode is SUCCESS, the primitive contains the vertexes to be sent to the MN.  
19

#### 22 B.4.4.4 Effect on receipt

23 On receipt of this primitive, the MIH constructs a MING POA Report Response message. The MN then  
24 attempts to transmit this to the MN indicated by the PeerSTAAddress parameter.  
25

### 30 B.4.5 Media Independent Neighbor Graph (MING) Query

31 Information service primitives as defined in Section 8.5 are sufficient for query and response of neighbor  
32 information. However the following new filter type is needed in addition to the filters that are defined ear-  
33 lier.  
34

35 — FILTER\_INFO\_NEIGHBOR\_INFO

36 InfoQueryParameters while using the above filter includes 802.21neighbor information IE containing a  
37 PoA. The format of such neighbor information IE is discussed in section 11.5.1. On the other hand,  
38 MIH\_REPORT in query response contains the list of neighbor information IEs along around the POA.  
39

40 More flexible query with detailed search conditions as well as query for obtaining higher layer information  
41 is better performed using the RDF/XML based query as described below.  
42

#### 48 B.4.6 Neighbor Information IE

49 A neighbor information IE is a variable-length IE that carries the identification of a particular POA along  
50 with the information that is associated with the particular point of attachment.  
51

52 Length (1 byte)	53 Zero, One or More Neighbor Information Entry (Variable)
--------------------	--

54 — Length: Length specifies the length of the fields after the length field.  
55  
56  
57

- 1 — Neighbor Information Entry : Neighbor information entry contains all the information relevant to a  
 2 particular neighbor and is defined below  
 3

4 Link Type (1byte)	5 POA ID Length (1 byte)	6 POA ID (Variable )	7 Link Information Length (1 byte)	8 Link Information (Variable)
------------------------	-----------------------------	-------------------------	---------------------------------------	----------------------------------

- 9 — Link Type : 1--802.3 , 2 --- 802.11, 3--802.16 ,4--GSM , 5--GPRS ,6--CDMA2000, 7--- WCDMA  
 10 — POA ID length: POA ID length is the length of the POA ID field  
 11 — POA ID: POA ID is the identification of the point of attachment of a specific link type. For exam-  
 12 ple, POA ID can be MAC address of the AP, BS or Ethernet switch.  
 13 — Link Information length: Link information length specifies the length of the link information  
 14 — Link Information: Link information contains the information related to that particular link  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65

## Annex C

### Schema Representation

#### C.1 BasicSchema representation in RDF/XML : (normative)

```

1
2
3
4
5
6
7
8
9
10 <?xml version="1.0"?>
11 <!DOCTYPE rdf:RDF [
12   <!ENTITY rdf "http://www.w3.org/1999/02/22-rdf-syntax-ns#">
13   <!ENTITY rdfs "http://www.w3.org/2000/01/rdf-schema#">
14   <!ENTITY mihbase "URL_TO_BE_ASSIGNED">
15   <!ENTITY owl "http://www.w3.org/2002/07/owl#">
16   <!ENTITY xsd "http://www.w3.org/2001/XMLSchema#">
17 ]>
18
19
20 <rdf:RDF xmlns:rdf="&rdf;" xmlns:rdfs="&rdfs;" xmlns:mihbase="&mihbase;"
21   xml:base="&mihbase;" xmlns:owl="&owl;" xmlns:xsd="&xsd;">
22
23
24   <owl:Ontology rdf:about="">
25     <rdfs:comment></rdfs:comment>
26     <rdfs:label>Basic Schema for IEEE 802.21 Information Service</rdfs:label>
27   </owl:Ontology>
28
29
30   <owl:Class rdf:ID="PoA">
31     <rdfs:subClassOf>
32       <owl:Restriction>
33         <owl:onProperty rdf:resource="#data-rate"/>
34         <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
35       </owl:Restriction>
36     </rdfs:subClassOf>
37     <rdfs:subClassOf>
38       <owl:Restriction>
39         <owl:onProperty rdf:resource="#phy-type"/>
40         <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
41       </owl:Restriction>
42     </rdfs:subClassOf>
43     <rdfs:subClassOf>
44       <owl:Restriction>
45         <owl:onProperty rdf:resource="#phy-type"/>
46         <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
47       </owl:Restriction>
48     </rdfs:subClassOf>
49     <rdfs:subClassOf>
50       <owl:Restriction>
51         <owl:onProperty rdf:resource="#mac-type"/>
52         <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
53       </owl:Restriction>
54     </rdfs:subClassOf>
55     <rdfs:subClassOf>
56       <owl:Restriction>
57         <owl:onProperty rdf:resource="#mac-type"/>
58         <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
59       </owl:Restriction>
60     </rdfs:subClassOf>
61   </owl:Class>
62
63
64
65

```

```

1      </rdfs:subClassOf>
2      <rdfs:subClassOf>
3      <owl:Restriction>
4          <owl:onProperty rdf:resource="#channel-range"/>
5          <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
6      </owl:Restriction>
7      </rdfs:subClassOf>
8      <rdfs:subClassOf>
9      <owl:Restriction>
10         <owl:onProperty rdf:resource="#channel-range"/>
11         <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
12     </owl:Restriction>
13 </rdfs:subClassOf>
14 <rdfs:subClassOf>
15 <owl:Restriction>
16     <owl:onProperty rdf:resource="#qos"/>
17     <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
18 </owl:Restriction>
19 </rdfs:subClassOf>
20 <rdfs:subClassOf>
21 <owl:Restriction>
22     <owl:onProperty rdf:resource="#security"/>
23     <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
24 </owl:Restriction>
25 </rdfs:subClassOf>
26 <rdfs:subClassOf>
27 <owl:Restriction>
28     <owl:onProperty rdf:resource="#neighboring-poa"/>
29     <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
30 </owl:Restriction>
31 </rdfs:subClassOf>
32 <rdfs:subClassOf>
33 <owl:Restriction>
34     <owl:onProperty rdf:resource="#poa-location"/>
35     <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
36 </owl:Restriction>
37 </rdfs:subClassOf>
38 <rdfs:subClassOf>
39 <owl:Restriction>
40     <owl:onProperty rdf:resource="#poa-location"/>
41     <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
42 </owl:Restriction>
43 </rdfs:subClassOf>
44 <rdfs:subClassOf>
45 <owl:Restriction>
46     <owl:onProperty rdf:resource="#poa-location"/>
47     <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
48 </owl:Restriction>
49 </rdfs:subClassOf>
50 <rdfs:subClassOf>
51 <owl:Restriction>
52     <owl:onProperty rdf:resource="#operator-identifier"/>
53     <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
54 </owl:Restriction>
55 </rdfs:subClassOf>
56 <rdfs:subClassOf>
57 <owl:Restriction>
58     <owl:onProperty rdf:resource="#operator-identifier"/>
59     <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
60 </owl:Restriction>
61 </rdfs:subClassOf>
62 <rdfs:subClassOf>
63 <owl:Restriction>
64     <owl:onProperty rdf:resource="#operator-identifier"/>
65     <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
66 </owl:Restriction>

```

```
1     </rdfs:subClassOf>
2     <rdfs:subClassOf>
3     <owl:Restriction>
4         <owl:onProperty rdf:resource="#cost"/>
5         <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
6     </owl:Restriction>
7 </rdfs:subClassOf>
8 <rdfs:subClassOf>
9     <owl:Restriction>
10        <owl:onProperty rdf:resource="#cost"/>
11        <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
12    </owl:Restriction>
13 </rdfs:subClassOf>
14 <rdfs:subClassOf>
15     <owl:Restriction>
16        <owl:onProperty rdf:resource="#poa-capabilities"/>
17        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
18    </owl:Restriction>
19 </rdfs:subClassOf>
20 <rdfs:subClassOf>
21     <owl:Restriction>
22        <owl:onProperty rdf:resource="#poa-capabilities"/>
23        <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
24    </owl:Restriction>
25 </rdfs:subClassOf>
26 <rdfs:subClassOf>
27     <owl:Restriction>
28        <owl:onProperty rdf:resource="#roaming-partner"/>
29        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
30    </owl:Restriction>
31 </rdfs:subClassOf>
32 <rdfs:subClassOf>
33     <owl:Restriction>
34        <owl:onProperty rdf:resource="#poa-subnet-info"/>
35        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
36    </owl:Restriction>
37 </rdfs:subClassOf>
38 <rdfs:subClassOf>
39     <owl:Restriction>
40        <owl:onProperty rdf:resource="#poa-address"/>
41        <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
42    </owl:Restriction>
43 </rdfs:subClassOf>
44 <rdfs:subClassOf>
45     <owl:Restriction>
46        <owl:onProperty rdf:resource="#link-type"/>
47        <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
48    </owl:Restriction>
49 </rdfs:subClassOf>
50 <rdfs:comment>
51     A distinct instance of this class must be assigned for each point of attachment.
52 </rdfs:comment>
53 </owl:Class>
```

```

1 <owl:DatatypeProperty rdf:ID="data-rate">
2 <rdfs:label>Data Rate</rdfs:label>
3 <rdfs:domain rdf:resource="#PoA"/>
4 <rdfs:range rdf:resource="&xsd;unsignedInt"/>
5 <rdfs:comment>
6 The data-rate property contains a maximum data rate of the link layer of the PoA in unit of Kbps.
7 </rdfs:comment>
8 </owl:DatatypeProperty>
9
10 <owl:DatatypeProperty rdf:ID="phy-type">
11 <rdfs:label>PHY Type</rdfs:label>
12 <rdfs:domain rdf:resource="#PoA"/>
13 <rdfs:range rdf:resource="&xsd;string"/>
14 </owl:DatatypeProperty>
15
16 <owl:DatatypeProperty rdf:ID="mac-type">
17 <rdfs:label>MAC Type</rdfs:label>
18 <rdfs:domain rdf:resource="#PoA"/>
19 <rdfs:range rdf:resource="&xsd;string"/>
20 </owl:DatatypeProperty>
21
22 <owl:Class rdf:ID="Channel-Range">
23 <rdfs:subClassOf>
24 <owl:Restriction>
25 <owl:onProperty rdf:resource="#low-channel-range"/>
26 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
27 </owl:Restriction>
28 </rdfs:subClassOf>
29 <rdfs:subClassOf>
30 <owl:Restriction>
31 <owl:onProperty rdf:resource="#high-channel-range"/>
32 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
33 </owl:Restriction>
34 </rdfs:subClassOf>
35 </owl:Class>
36
37 <owl:ObjectProperty rdf:ID="channel-range">
38 <rdfs:label>Channel Range</rdfs:label>
39 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
40 <rdfs:domain rdf:resource="#PoA"/>
41 <rdfs:range rdf:resource="#Channel-Range"/>
42 </owl:ObjectProperty>
43
44 <owl:DatatypeProperty rdf:ID="low-channel-range">
45 <rdfs:label>Low Channel Range</rdfs:label>
46 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
47 <rdfs:domain rdf:resource="#Channel-Range"/>
48 <rdfs:range rdf:resource="&xsd;unsignedInt"/>
49 </owl:DatatypeProperty>
50
51 <owl:DatatypeProperty rdf:ID="high-channel-range">
52 <rdfs:label>High Channel Range</rdfs:label>
53 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
54 <rdfs:domain rdf:resource="#Channel-Range"/>
55 </owl:DatatypeProperty>
56
57 </owl:DatatypeProperty>
58
59 </owl:DatatypeProperty>
60
61 </owl:DatatypeProperty>
62
63 </owl:DatatypeProperty>
64
65 </owl:DatatypeProperty>

```

```
1 <rdfs:range rdf:resource="&xsd;unsignedInt"/>
2 </owl:DatatypeProperty>
3
4 <owl:DatatypeProperty rdf:ID="security">
5 <rdfs:label>Security</rdfs:label>
6 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
7 <rdfs:domain rdf:resource="#PoA"/>
8 <rdfs:range rdf:resource="&xsd;boolean"/>
9 </owl:DatatypeProperty>
10
11 <owl:DatatypeProperty rdf:ID="uam">
12 <rdfs:label>UAM</rdfs:label>
13 <rdfs:subPropertyOf rdf:resource="#security"/>
14 </owl:DatatypeProperty>
15
16 <owl:DatatypeProperty rdf:ID="pana">
17 <rdfs:label>PANA</rdfs:label>
18 <rdfs:subPropertyOf rdf:resource="#security"/>
19 </owl:DatatypeProperty>
20
21 <owl:DatatypeProperty rdf:ID="qos">
22 <rdfs:label>QoS</rdfs:label>
23 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
24 <rdfs:domain rdf:resource="#PoA"/>
25 <rdfs:range rdf:resource="&xsd;boolean"/>
26 </owl:DatatypeProperty>
27
28 <owl:DatatypeProperty rdf:ID="diffserv">
29 <rdfs:label>Diffserv</rdfs:label>
30 <rdfs:subPropertyOf rdf:resource="#qos"/>
31 </owl:DatatypeProperty>
32
33 <owl:ObjectProperty rdf:ID="neighboring-poa">
34 <rdfs:label>Neighboring PoAs</rdfs:label>
35 <rdfs:domain rdf:resource="#PoA"/>
36 <rdfs:range rdf:resource="#PoA"/>
37 </owl:ObjectProperty>
38
39 <owl:ObjectProperty rdf:ID="poa-location">
40 <rdfs:label>PoA Location</rdfs:label>
41 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
42 <rdfs:domain rdf:resource="#PoA"/>
43 <rdfs:range rdf:resource="#PoA-Location"/>
44 </owl:ObjectProperty>
45
46 <owl:ObjectProperty rdf:ID="operator-identifier">
47 <rdfs:label>Operator Identifier</rdfs:label>
48 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
49 <rdfs:domain rdf:resource="#PoA"/>
50 <rdfs:range rdf:resource="#Operator-Identifier"/>
51 </owl:ObjectProperty>
52
53 <owl:ObjectProperty rdf:ID="roaming-partner">
54 <rdfs:label>Roaming Partner</rdfs:label>
```

```

1   <rdfs:domain rdf:resource="#PoA"/>
2   <rdfs:range rdf:resource="#Operator-Identifier"/>
3   </owl:ObjectProperty>
4
5
6   <owl:DatatypeProperty rdf:ID="cost">
7     <rdfs:label>Cost</rdfs:label>
8     <rdfs:domain rdf:resource="#PoA"/>
9     <rdfs:range rdf:resource="&xsd:string"/>
10    </owl:DatatypeProperty>
11
12
13   <owl:DatatypeProperty rdf:ID="poa-capabilities">
14     <rdfs:label>PoA Capabilities</rdfs:label>
15     <rdfs:domain rdf:resource="#PoA"/>
16     <rdfs:range rdf:resource="&xsd:unsignedInt"/>
17     <rdfs:comment>
18       PoA Capability bitmap
19       Bit 0:Security
20       Bit 1:QoS
21       Bit 2:Internet Access
22       Bit 3:IP Version 4
23       Bit 4:IP Version 6
24       Bit 5:Emergency Services
25       Bit 6:-31:Reserved
26     </rdfs:comment>
27   </owl:DatatypeProperty>
28
29
30   <owl:ObjectProperty rdf:ID="poa-subnet-info">
31     <rdfs:label>PoA subnet info</rdfs:label>
32     <rdfs:domain rdf:resource="#PoA"/>
33     <rdfs:range rdf:resource="#Subnet-Information"/>
34   </owl:ObjectProperty>
35
36
37   <owl:Class rdf:ID="Subnet-Information">
38     <rdfs:subClassOf>
39       <owl:Restriction>
40         <owl:onProperty rdf:resource="#subnet-address"/>
41         <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
42       </owl:Restriction>
43     </rdfs:subClassOf>
44     <rdfs:subClassOf>
45       <owl:Restriction>
46         <owl:onProperty rdf:resource="#prefix-length"/>
47         <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
48       </owl:Restriction>
49     </rdfs:subClassOf>
50   </owl:Class>
51
52
53   <owl:ObjectProperty rdf:ID="subnet-address">
54     <rdfs:label>Subnet Address</rdfs:label>
55     <rdfs:domain rdf:resource="#Subnet-Information"/>
56     <rdfs:range rdf:resource="#Address"/>
57   </owl:ObjectProperty>
58
59
60   <owl:DatatypeProperty rdf:ID="prefix-length">

```

```

1   <rdfs:label>Prefix Length</rdfs:label>
2   <rdfs:domain rdf:resource="#Subnet-Information"/>
3   <rdfs:range rdf:resource="&xsd;unsignedByte"/>
4   </owl:DatatypeProperty>
5
6
7   <owl:Class rdf:ID="PoA-Location">
8     <rdfs:subClassOf>
9       <owl:Restriction>
10        <owl:onProperty rdf:resource="#geospatial-location-information"/>
11        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
12      </owl:Restriction>
13    </rdfs:subClassOf>
14    <rdfs:subClassOf>
15      <owl:Restriction>
16        <owl:onProperty rdf:resource="#geospatial-location-information"/>
17        <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
18      </owl:Restriction>
19    </rdfs:subClassOf>
20    <rdfs:subClassOf>
21      <owl:Restriction>
22        <owl:onProperty rdf:resource="#civic-location-information"/>
23        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
24      </owl:Restriction>
25    </rdfs:subClassOf>
26    <rdfs:subClassOf>
27      <owl:Restriction>
28        <owl:onProperty rdf:resource="#civic-location-information"/>
29        <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
30      </owl:Restriction>
31    </rdfs:subClassOf>
32    <rdfs:subClassOf>
33      <owl:Restriction>
34        <owl:onProperty rdf:resource="#method"/>
35        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
36      </owl:Restriction>
37    </rdfs:subClassOf>
38    <rdfs:subClassOf>
39      <owl:Restriction>
40        <owl:onProperty rdf:resource="#method"/>
41        <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
42      </owl:Restriction>
43    </rdfs:subClassOf>
44  </rdfs:comment>
45  This class has properties that indicate a location of PoA.
46  The properties include geospatial-location-information, civic-location-information and method.
47  Any property can be added to this class in an extended schema.
48 </rdfs:comment>
49 </owl:Class>
50
51 <owl:ObjectProperty rdf:ID="geospatial-location-information">
52 <rdfs:label>Geospatial Locaiton Information</rdfs:label>
53 <rdf:type rdf:resource="&owl;FunctionalProperty" />
54 <rdfs:domain rdf:resource="#PoA-Location"/>
55 <rdfs:range rdf:resource="#Geospatial-Location-Information"/>

```

```

1 </owl:ObjectProperty>
2
3 <owl:Class rdf:ID="Geospatial-Location-Information">
4 <rdfs:subClassOf>
5 <owl:Restriction>
6 <owl:onProperty rdf:resource="#latitude-resolution"/>
7 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
8 </owl:Restriction>
9
10 </rdfs:subClassOf>
11 <rdfs:subClassOf>
12 <owl:Restriction>
13 <owl:onProperty rdf:resource="#latitude"/>
14 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
15 </owl:Restriction>
16 </rdfs:subClassOf>
17 <rdfs:subClassOf>
18 <owl:Restriction>
19 <owl:onProperty rdf:resource="#longitude-resolution"/>
20 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
21 </owl:Restriction>
22 </rdfs:subClassOf>
23 <rdfs:subClassOf>
24 <owl:Restriction>
25 <owl:onProperty rdf:resource="#longitude"/>
26 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
27 </owl:Restriction>
28 </rdfs:subClassOf>
29 <rdfs:subClassOf>
30 <owl:Restriction>
31 <owl:onProperty rdf:resource="#altitude-type"/>
32 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
33 </owl:Restriction>
34 </rdfs:subClassOf>
35 <rdfs:subClassOf>
36 <owl:Restriction>
37 <owl:onProperty rdf:resource="#altitude-resolution"/>
38 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
39 </owl:Restriction>
40 </rdfs:subClassOf>
41 <rdfs:subClassOf>
42 <owl:Restriction>
43 <owl:onProperty rdf:resource="#altitude"/>
44 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
45 </owl:Restriction>
46 </rdfs:subClassOf>
47 <rdfs:subClassOf>
48 <owl:Restriction>
49 <owl:onProperty rdf:resource="#datum"/>
50 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
51 </owl:Restriction>
52 </rdfs:subClassOf>
53 <rdfs:subClassOf>
54 <owl:Restriction>
55 <owl:onProperty rdf:resource="#altitude-resolution"/>
56 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
57 </owl:Restriction>
58 </rdfs:subClassOf>
59 <rdfs:comment>
60 This class has properties that represent geographic coordinate.
61 The format is based on the Location Configuration Information (LCI) defined in RFC 3825.
62
63
64
65

```

```
1      </rdfs:comment>
2      </owl:Class>
3
4      <owl:DatatypeProperty rdf:ID="latitude-resolution">
5      <rdfs:label>Latitude Resolution</rdfs:label>
6      <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
7      <rdfs:range rdf:parseType="Resource">
8      <xsd:integer.minInclusive rdf:datatype="&xsd;integer">0</xsd:integer.minInclusive>
9      <xsd:integer.maxInclusive rdf:datatype="&xsd;integer">34</xsd:integer.maxInclusive>
10     <rdfs:subClassOf rdf:resource="&xsd;integer"/>
11     </rdfs:range>
12     <rdfs:comment>
13     This property contains the latitude resolution.
14     </rdfs:comment>
15     </owl:DatatypeProperty>
16
17     <owl:DatatypeProperty rdf:ID="latitude">
18     <rdfs:label>Latitude</rdfs:label>
19     <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
20     <rdfs:range rdf:parseType="Resource">
21     <xsd:hexBinary.minInclusive rdf:datatype="&xsd;hexBinary">0</xsd:hexBinary.minInclusive>
22     <xsd:hexBinary.maxInclusive rdf:datatype="&xsd;hexBinary">3FFFFFFF</xsd:hexBinary.maxInclu-
23     <rdfs:subClassOf rdf:resource="&xsd;hexBinary"/>
24     </rdfs:range>
25     <rdfs:comment>
26     This property contains the integer part of latitude of the location.
27     </rdfs:comment>
28     </owl:DatatypeProperty>
29
30     <owl:DatatypeProperty rdf:ID="longitude-resolution">
31     <rdfs:label>Longitude Resolution</rdfs:label>
32     <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
33     <rdfs:range rdf:parseType="Resource">
34     <xsd:integer.minInclusive rdf:datatype="&xsd;integer">0</xsd:integer.minInclusive>
35     <xsd:integer.maxInclusive rdf:datatype="&xsd;integer">34</xsd:integer.maxInclusive>
36     <rdfs:subClassOf rdf:resource="&xsd;integer"/>
37     </rdfs:range>
38     <rdfs:comment>
39     This property contains the longitude resolution.
40     </rdfs:comment>
41     </owl:DatatypeProperty>
42
43     <owl:DatatypeProperty rdf:ID="longitude">
44     <rdfs:label>Longitude</rdfs:label>
45     <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
46     <rdfs:range rdf:parseType="Resource">
47     <xsd:hexBinary.minInclusive rdf:datatype="&xsd;hexBinary">0</xsd:hexBinary.minInclusive>
48     <xsd:hexBinary.maxInclusive rdf:datatype="&xsd;hexBinary">3FFFFFFF</xsd:hexBinary.maxInclu-
49     <rdfs:subClassOf rdf:resource="&xsd;hexBinary"/>
50     </rdfs:range>
51     <rdfs:comment>
52     This property contains the longitude of the location.
53     </rdfs:comment>
54     </owl:DatatypeProperty>
```

```

1
2 <owl:DatatypeProperty rdf:ID="altitude-type">
3   <rdfs:label>Altitude Type</rdfs:label>
4   <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
5   <rdfs:range rdf:parseType="Resource">
6     <xsd:integer.minInclusive rdf:datatype="&xsd;integer">0</xsd:integer.minInclusive>
7     <xsd:integer.maxInclusive rdf:datatype="&xsd;integer">2</xsd:integer.maxInclusive>
8     <rdfs:subClassOf rdf:resource="&xsd;integer"/>
9   </rdfs:range>
10  <rdfs:comment>
11    This property contains the altitude type.
12  </rdfs:comment>
13 </owl:DatatypeProperty>
14
15 <owl:DatatypeProperty rdf:ID="altitude-resolution">
16   <rdfs:label>Altitude Resolution</rdfs:label>
17   <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
18   <rdfs:range rdf:parseType="Resource">
19     <xsd:integer.minInclusive rdf:datatype="&xsd;integer">0</xsd:integer.minInclusive>
20     <xsd:integer.maxInclusive rdf:datatype="&xsd;integer">30</xsd:integer.maxInclusive>
21     <rdfs:subClassOf rdf:resource="&xsd;integer"/>
22   </rdfs:range>
23   <rdfs:comment>
24     This property contains the altitude resolution.
25   </rdfs:comment>
26 </owl:DatatypeProperty>
27
28 <owl:DatatypeProperty rdf:ID="altitude">
29   <rdfs:label>Altitude</rdfs:label>
30   <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
31   <rdfs:range rdf:parseType="Resource">
32     <xsd:hexBinary.minInclusive rdf:datatype="&xsd;hexBinary">0</xsd:hexBinary.minInclusive>
33     <xsd:hexBinary.maxInclusive rdf:datatype="&xsd;hexBinary">3FFFFFFF</xsd:hexBinary.maxInclu-
34     <rdfs:subClassOf rdf:resource="&xsd;hexBinary"/>
35   </rdfs:range>
36   <rdfs:comment>
37     This property contains the altitude of the location.
38   </rdfs:comment>
39 </owl:DatatypeProperty>
40
41 <owl:DatatypeProperty rdf:ID="datum">
42   <rdfs:label>Datum</rdfs:label>
43   <rdfs:domain rdf:resource="#Geospatial-Location-Information"/>
44   <rdfs:range rdf:parseType="Resource">
45     <xsd:integer.minInclusive rdf:datatype="&xsd;integer">1</xsd:integer.minInclusive>
46     <xsd:integer.maxInclusive rdf:datatype="&xsd;integer">2</xsd:integer.maxInclusive>
47     <rdfs:subClassOf rdf:resource="&xsd;integer"/>
48   </rdfs:range>
49   <rdfs:comment>
50     This property contains the datum type.
51   </rdfs:comment>
52 </owl:DatatypeProperty>
53
54 <owl:ObjectProperty rdf:ID="civic-location-information">
55
56
57
58
59
60
61
62
63
64
65

```

```

1   <rdfs:label>Civic Location Information</rdfs:label>
2   <rdf:type rdf:resource="&owl;FunctionalProperty" />
3   <rdfs:domain rdf:resource="#PoA-Location"/>
4   <rdfs:range rdf:resource="#Civic-Location-Information"/>
5   </owl:ObjectProperty>
6
7
8   <owl:Class rdf:ID="Civic-Location-Information">
9     <rdfs:subClassOf>
10      <owl:Restriction>
11        <owl:onProperty rdf:resource="#country-code"/>
12        <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
13      </owl:Restriction>
14    </rdfs:subClassOf>
15    <rdfs:subClassOf>
16      <owl:Restriction>
17        <owl:onProperty rdf:resource="#country-address-elements"/>
18        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
19      </owl:Restriction>
20    </rdfs:subClassOf>
21    <rdfs:comment>
22      This class has properties that represent civic address.
23      The format is defined in draft-ietf-geopriv-radius-lo-04.txt.
24    </rdfs:comment>
25  </owl:Class>
26
27  <owl:DatatypeProperty rdf:ID="country-code">
28    <rdfs:label>Country Code</rdfs:label>
29    <rdfs:domain rdf:resource="#Civic-Location-Information"/>
30    <rdfs:range rdf:parseType="Resource">
31      <xsd:string.length rdf:datatype="&xsd;integer">2</xsd:string.length>
32    </rdfs:subClassOf rdf:resource="&xsd;string"/>
33  </rdfs:range>
34  <rdfs:comment>
35    This property contains the two-letter ISO 3166 country code in capital ASCII letters.
36  </rdfs:comment>
37  </owl:DatatypeProperty>
38
39  <owl:ObjectProperty rdf:ID="country-address-elements">
40    <rdfs:label>Country Address Elements</rdfs:label>
41    <rdfs:domain rdf:resource="#Civic-Location-Information"/>
42    <rdfs:range rdf:resource="#Country-Address-Elements"/>
43    <rdfs:comment>
44      This property contains the location information element. The format of the civic address elements is
45      described in Section 3.3 of draft-ietf-geopriv-dhcp-civil-08.txt with a TLV pair
46      (whereby the Type and Length fields are one octet long).
47    </rdfs:comment>
48  </owl:ObjectProperty>
49
50  <owl:Class rdf:ID="Country-Address-Elements">
51    <rdfs:subClassOf>
52      <owl:Restriction>
53        <owl:onProperty rdf:resource="#country-address-element"/>
54        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
55      </owl:Restriction>
56    </rdfs:subClassOf>
57  </owl:Class>
58
59  <owl:Class rdf:ID="Country-Address-Element">
60    <rdfs:subClassOf>
61      <owl:Restriction>
62        <owl:onProperty rdf:resource="#country-address-element"/>
63        <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
64      </owl:Restriction>
65    </rdfs:subClassOf>
66  </owl:Class>

```

```

1     </rdfs:subClassOf>
2     </owl:Class>
3
4
5     <owl:ObjectProperty rdf:ID="country-address-element">
6     <rdfs:label>Country Address Element</rdfs:label>
7     <rdfs:domain rdf:resource="#Country-Address-Elements"/>
8     <rdfs:range rdf:resource="#Country-Address-Element"/>
9     <rdfs:comment>
10
11     This property contains the country address elements.The format of the civic address elements is described
12     in Section 3.4 of draft-ietf-geopriv-dhcp-civil-08.txt with a TLV pair (whereby the Type and Length fields
13     are one octet long).
14     </rdfs:comment>
15     </owl:ObjectProperty>
16
17
18     <owl:Class rdf:ID="Country-Address-Element">
19     <rdfs:subClassOf>
20     <owl:Restriction>
21     <owl:onProperty rdf:resource="#catype"/>
22     <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
23     </owl:Restriction>
24     </rdfs:subClassOf>
25     <rdfs:subClassOf>
26     <owl:Restriction>
27     <owl:onProperty rdf:resource="#cavalue"/>
28     <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
29     </owl:Restriction>
30     </rdfs:subClassOf>
31     </owl:Class>
32
33
34
35
36     <owl:DatatypeProperty rdf:ID="catype">
37     <rdfs:label>CAtype</rdfs:label>
38     <rdf:type rdf:resource="&owl;FunctionalProperty"/>
39     <rdfs:domain rdf:resource="#Country-Address-Element"/>
40     <rdfs:range rdf:resource="&xsd;unsignedByte"/>
41     <rdfs:comment>
42
43     A one-octet descriptor of the data civic address value.
44     </rdfs:comment>
45     </owl:DatatypeProperty>
46
47
48
49     <owl:DatatypeProperty rdf:ID="cavalue">
50     <rdfs:label>CAvalue</rdfs:label>
51     <rdf:type rdf:resource="&owl;FunctionalProperty"/>
52     <rdfs:domain rdf:resource="#Country-Address-Element"/>
53     <rdfs:range rdf:resource="&xsd;string"/>
54     <rdfs:comment>
55
56     The civic address value.
57     </rdfs:comment>
58     </owl:DatatypeProperty>
59
60
61     <owl:DatatypeProperty rdf:ID="method">
62     <rdfs:label>Method</rdfs:label>
63     <rdf:type rdf:resource="&owl;FunctionalProperty" />
64     <rdfs:domain rdf:resource="#PoA-Location"/>
65     <rdfs:range rdf:resource="&xsd;unsignedByte"/>

```

```

1   </owl:DatatypeProperty>
2
3   <owl:DatatypeProperty rdf:ID="link-type">
4     <rdfs:label>Link Type</rdfs:label>
5     <rdf:type rdf:resource="&owl;FunctionalProperty"/>
6     <rdfs:domain rdf:resource="#PoA"/>
7     <rdfs:range rdf:resource="&xsd;unsignedInt"/>
8     <rdfs:comment>
9       This property contains a RADIUS NAS-Port-Type attribute value defined in
10      http://www.iana.org/assignments/radius-types.
11    </rdfs:comment>
12  </owl:DatatypeProperty>
13
14  <owl:ObjectProperty rdf:ID="poa-address">
15    <rdfs:label>PoA Address</rdfs:label>
16    <rdf:type rdf:resource="&owl;FunctionalProperty"/>
17    <rdfs:domain rdf:resource="#PoA"/>
18    <rdfs:range rdf:resource="#Address"/>
19    <rdfs:comment>
20      This property contains a link-specific identifier of PoA.
21    </rdfs:comment>
22  </owl:ObjectProperty>
23
24  <owl:Class rdf:ID="Address">
25    <rdfs:subClassOf>
26      <owl:Restriction>
27        <owl:onProperty rdf:resource="#address-type"/>
28        <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
29      </owl:Restriction>
30    </rdfs:subClassOf>
31    <rdfs:subClassOf>
32      <owl:Restriction>
33        <owl:onProperty rdf:resource="#address"/>
34        <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
35      </owl:Restriction>
36    </rdfs:subClassOf>
37  </owl:Class>
38
39  <owl:DatatypeProperty rdf:ID="address-type">
40    <rdfs:label>Address Type</rdfs:label>
41    <rdf:type rdf:resource="&owl;FunctionalProperty"/>
42    <rdfs:domain rdf:resource="#Address"/>
43    <rdfs:range rdf:resource="&xsd;unsignedShort"/>
44  </owl:DatatypeProperty>
45
46  <owl:DatatypeProperty rdf:ID="address">
47    <rdfs:label>Address</rdfs:label>
48    <rdf:type rdf:resource="&owl;FunctionalProperty"/>
49    <rdfs:domain rdf:resource="#Address"/>
50    <rdfs:range rdf:resource="&xsd;hexBinary"/>
51  </owl:DatatypeProperty>
52
53  <owl:Class rdf:ID="Operator-Identifier">
54    <rdfs:subClassOf>

```

```
1 <owl:Restriction>
2 <owl:onProperty rdf:resource="#operator-namespace"/>
3 <owl:minCardinality rdf:datatype="&xsd;nonNegativeInteger">0</owl:minCardinality>
4 </owl:Restriction>
5 </rdfs:subClassOf>
6 <rdfs:subClassOf>
7 <owl:Restriction>
8 <owl:onProperty rdf:resource="#operator-namespace"/>
9 <owl:maxCardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:maxCardinality>
10 </owl:Restriction>
11 </rdfs:subClassOf>
12 <rdfs:subClassOf>
13 <owl:Restriction>
14 <owl:onProperty rdf:resource="#operator-name"/>
15 <owl:cardinality rdf:datatype="&xsd;nonNegativeInteger">1</owl:cardinality>
16 </owl:Restriction>
17 </rdfs:subClassOf>
18 <rdfs:comment>
19 This class has properties that represent an operator.
20 The properties are operator-namespace and operator-name.
21 </rdfs:comment>
22 </owl:Class>
23
24 <owl:DatatypeProperty rdf:ID="operator-namespace">
25 <rdfs:label>Operator Namespace</rdfs:label>
26 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
27 <rdf:domain rdf:resource="#Operator-Identifier"/>
28 <rdf:range rdf:parseType="Resource">
29 <xsd:string.minLength rdf:datatype="&xsd;integer">1</xsd:string.minLength>
30 <xsd:string.maxLength rdf:datatype="&xsd;integer">253</xsd:string.maxLength>
31 <rdfs:subClassOf rdf:resource="&xsd;string"/>
32 </rdfs:range>
33 </owl:DatatypeProperty>
34 <owl:DatatypeProperty rdf:ID="operator-name">
35 <rdfs:label>Operator Name</rdfs:label>
36 <rdf:type rdf:resource="&owl;FunctionalProperty"/>
37 <rdf:domain rdf:resource="#Operator-Identifier"/>
38 <rdf:range rdf:parseType="Resource">
39 <xsd:string.minLength rdf:datatype="&xsd;integer">1</xsd:string.minLength>
40 <xsd:string.maxLength rdf:datatype="&xsd;integer">253</xsd:string.maxLength>
41 <rdfs:subClassOf rdf:resource="&xsd;string"/>
42 </rdfs:range>
43 <rdfs:comment>
44 This property contains the name of the operator.
45 </rdfs:comment>
46 </owl:DatatypeProperty>
47 </rdf:RDF>
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
```

## Annex D

(informative)

### Media Specific Enhancements

#### D.1. 802.3 MAC/PHY Amendments

A new *ethertype* value must be defined for proper accommodation of MIH PDUs in IEEE 802.3 data frames.

#### D.2. 802.11 MAC/PHY Amendments

Please refer to document 21-05-0350-xx-0000-Req\_Amendments\_802\_11 for further details regarding specific requirements and suggested amendments for 802.11 media.

#### D.3. 802.16 MAC/PHY Amendments

Please refer to document 21-05-0335-xx-0000-Req\_Amendments\_802\_16 for further details regarding specific requirements and suggested amendments for 802.16 media.

#### D.4. Cellular specific Amendments

Please refer to document 21-05-0300-xx-0000-Adhoc3GPPLiasionPackage for further details regarding specific requirements and suggested amendments for 3GPP specific media.

Please refer to document 21-05-0396-xx-0000-Adhoc3GPP2LiasionPackage for further details regarding specific requirements and suggested amendments for 3GPP2 specific media.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65