



Universal Power Adapter for Mobile Devices

IEEE Project 1823

Portable Power Delivery Convergence

Bob Davis
UPAMD/P1823 Chair
MSC Chair
7 March 2012

UPAMD/P1823 Purpose


- The UPAMD standard creates a common interconnect for power delivery in the 10W to 240W power range to portable and fixed devices. This standard supports more universal use and reuse of power adapters replacing brand specific and model specific power adapters. The UPAMD adapter system may be usable in portable computing and entertainment systems, security, household and office equipment within the power range. Universality and reuse are among the primary driving factors. Communications may support the adaption of the powered device performance to the power available.

Why UPAMD/P1823?

- UPAMD, Universal Power Adapter for Mobile Devices, is a durable product intended for multi-generational use to replace the current industry standard disposable power systems of power bricks and wall-warts used for battery charging and external Power Supplies (EPS). Our UPAMD strategy of durable usage will reduce the current disposal requirements for 200 to 400 million obsolete power bricks and wall-warts each year. Additionally the reuse of the UPAMD modules will reduce the cost of change to a new system as the power adapter will remain in use. A common interface will make power adapters universally available. With the UPAMD power system the question becomes “Do you have a power adapter?” and not “What power adapters do you have?”
- Universality of the UPAMD system guarantees the interoperability of all conforming adapters and power using devices.

IEEE Universal Power Adapter Project

- P1823, IEEE Draft Standard for Universal Power Adapter for Mobile Devices (UPAMD)

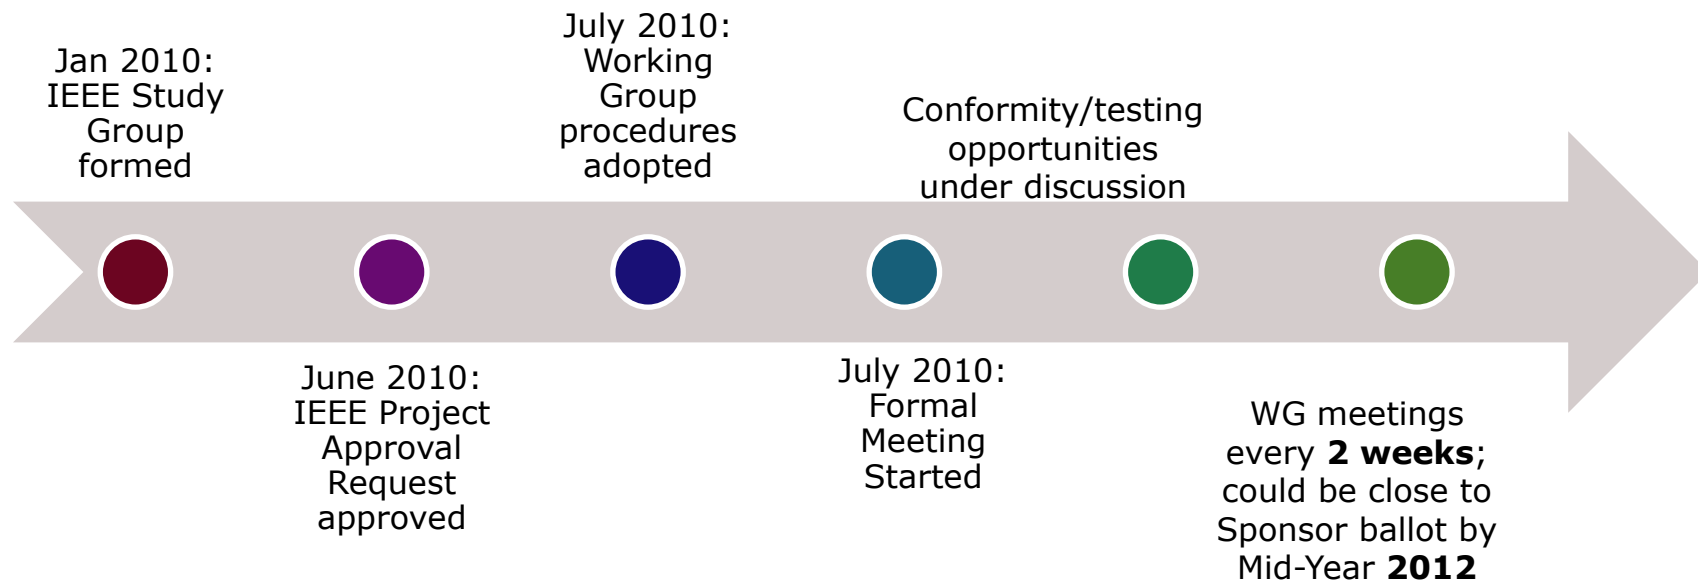

- Project initiated by industry
- 151 subscribers to project reflector (6 March 2012)
- Estimated 95% worldwide support (ODM & OEM)
- Main Working Group plus 4 Sub-committees every 2 weeks
- Open Meetings via Teleconference and WebEx

IEEE P1823: UPAMD Goals

Web site: <http://grouper.ieee.org/groups/msc/upamd/index.html>

- Life expectancy minimum of **10 years**, hopefully much more
- Same connector for ALL device and adapter connections
- Power range **10 W < UPAMD < 130 W** delivered to device; is brand, model, and year agnostic (increased by committee to <240W Maximum)
- First adapter must work with last device designed and last adapter with first device designed. Standard compatibility.
 - **Adapter <-> Mobile Device communications** required for higher power safety
 - Continuous communications growth to support growth of UPAMD capability
- Must support devices with, and with-out, internal battery power.
 - **Basic power delivery mechanism – EPS (External Power Supply)**
 - Make independent of rapidly changing technology
- Standard designed to support **Certification** testing of adapter and device
- Connector design to consider future mobile device design options
 - **Smaller profiles, headed for 10mm to 5mm?** Different shape devices, non-edge usage
- No DANGEROUS power without communications
 - Maximum energy at cable connect and disconnect < 15uJ
 - Maximum exposed power on unconnected power source connector is <500 uW.
- Any Device may be capable of being a source or sink of power
 - Able to share power for mission critical or business critical applications
- **Connector must not mate with any current designs**—product safety issue—no confusion
- 5 Environmentally friendly to eventual disposal

IEEE P1823: UPAMD Goals

Connector

- Not compatible w/existing designs
- Easy disconnect plus High Retention
- Floating electrical connection
- Very high connect cycles
- Support low-profile devices

Communication

- 3.3V CAN Bus
- Communications over Twisted pair wires
- No communications Power < 20W
- Flexible, extensible Communications messages defined

Power

- 1 connector fits all power needs
- Power range: 10–240 Watt – Non-Battery and Battery devices
- Device to Device power sharing possible
- Smart interconnect

Power Specification (current)

- Power Range - $>10\text{W}$ to $<240\text{W}$
 - $>10\text{ W}$ to 130W at default 21V power at source
 - 130W power is delivered at 21 V and 6.5A .
 - Connector power pin current specification is 9 Amps each (redundant connections)
 - Sink (user) expects not less than 20V at input
 - Up to 240W with extended Voltage options
 - Sink may request higher voltage up to 60V iff source is capable of higher voltage
 - Power levels change over time based on power available and device requirements
- Mute – Non-Communicating device
 - Have low value termination for easy identification
 - Maximum power supplied is 21V with 1 Amp limit
 - Lower power requirements may use different termination – 21V with lower current
- Communications Power
 - 12V nominal ($10\text{-}14\text{V}$) current limited to 25mA (300mW)
 - Low Energy connection – stay under 15uJ maximum stored energy
 - Used to boot device controller to initialize communications
 - Switch to higher power after communication established and power level negotiated


Communications (current)

- Communication Method – 3.3V CAN Bus
- CAN Common Mode Voltage used for device detection.
 - No Device Detected – no power
 - Mute Device Detected – limited power 21 W maximum, 21V @ 1A
 - Bidirectional Device Detected – negotiate power flow based on priorities and capabilities of connected devices.
 - Smart Device Detected – Negotiate Power based on source and sink capabilities
 - Small power source may provide limited power with power sink adjusting to available power.
- Basic Messages
 - Available Power Message, source to sink defining source capability on this port at this time.
 - Requested Power Message, sink to source with requested power
 - Messages to supply device information, Manufacturer, Model, Serial number, Unique Identifier, etc.
 - Message to identify certification
- Advanced Messaging to discover larger device configuration and enable communications through connected devices.


Connector Design (current)

- Current Design
 - Spring Pin(Pogo) connector
 - 6 pin – 4 wire design
 - Cable has two identical ends
 - Cable replaceable with multiple lengths
- Features
 - Pins rated for 1,000,000 cycles
 - Power pins – Mill-Max 0850 series or equal
 - Communications pins – Mill-Max 0951 series or equal
 - Dual Main power pins for reliability – full capability if one fails
 - Pin Spacing supports 63V creepage and clearance under Pollution degree 3. IEC60950-1
 - Communications pins make last and break first.
 - No exposed pin has 3.3V probe voltage through 8Kohm resistor
 - Cable connector interface only to device connector (TARGET) is specified
 - Two stage mating – one for trip resistant low retention easily detached position, one for hard attach condition for critical connections and connections subject to high acceleration.
 - Device connector (Target) is fully specified.
 - Low profile – Flush with device surface.
 - Maximum surface penetration ~ 1.53 mm.
 - Surface can be sealed to resist moisture, dust, adult beverages, etc.

New UPAMD connector design

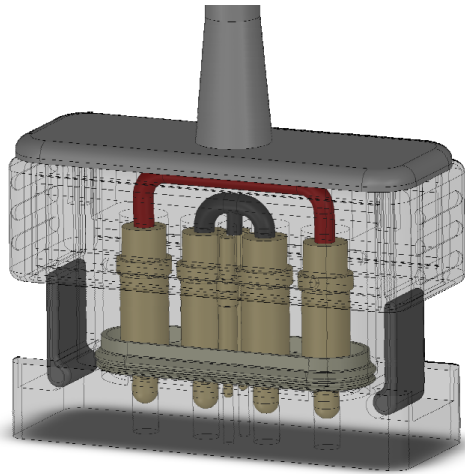

Cable Connector
Mating Interface Specified

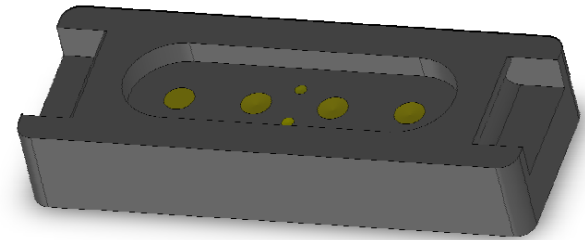

Target/Device Connector
Fully Specified
19.5mm L X 5.1mm W X 1.53mm D

Cable/Connectors resistance limited to less than
50mOhms per power rail. 100mOhms total resistance

UPAMD Market Size

- US DOE survey of domestic US shipments result for 2010
 - 221.5 Million EPS units in UPAMD power range to US Domestic Market alone.
 - 302 Million battery charger in UPAMD power range to US Domestic Market alone.
 - Battery Charges have both EPS and Battery control circuitry
- World wide shipments should reach 2-3 Billion units of BCS and EPS devices in UPAMD power range.
- Current 2011 PC world shipments 354.4 Million units with 15.9% y/y growth. (iSuppli)
- Tablet market growth to reach 294 Million in 2015 (Gartner)
- Reference:
http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/bceps_prealysis_tsd.pdf

UPAMD/P1823 Status

- Currently working to finish draft for balloting by working group.
- Expect Working Group approval mid-year
- Plan on Sponsor Ballot in Q3/2012
- Target Standards Board submission in Q4/2012
- I am always optimistic.