

Issues Underlying Supporting Multimedia Applications in IEEE 802.1

Fouad A. Tobagi
Stanford University
and
Starlight Networks

Presentation made at the IEEE 802 Meeting
Maui, July 10-14, 1995



Fouad Tobagi

1

Multimedia Applications

Applications involving many types of information

Data

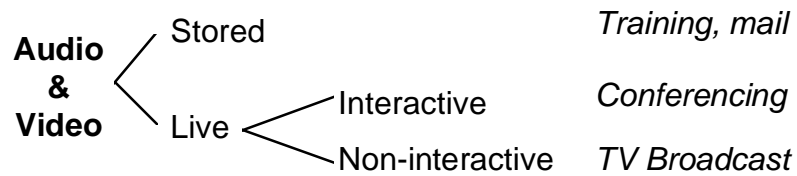

Fouad Tobagi

2

Video Applications

Stored Video Applications

- Training
 - Corporate training rooms, education, factory-floor reference
- Point of sale
 - Information kiosks, product information, advertising
- Video database
 - Advertising agencies, video editing groups, video production companies, karaoke systems, utility companies

Fouad Tobagi

3

Video Applications

Live Video Applications

- Desktop video conferencing
- Computer-supported collaboration
- Network TV

Other Networked Applications Support

- Large storage capacity
 - Databases
 - Home pay-per-view

Fouad Tobagi

4

Traffic Characteristics

	Data Traffic	MM Traffic
Data rate	Low	High
Traffic pattern	Bursty	Stream-oriented Highly bursty
Reliability req.	No Loss	Some loss
Latency req.	None	May be small (e.g., 20msec)

Fouad Tobagi

5

Traffic Characteristics (cont.)

	Data Traffic	MM Traffic
Mode of communication	Point-to-point	Multipoint
Temporal relationships	None	Synchronized transmissions
Type of service	Single traffic type	Multiple types

Fouad Tobagi

6

Requirements of Multimedia Applications

- High bandwidth
- Guaranteed bandwidth
- Guaranteed end-to-end latency
- Multicasting

Fouad Tobagi

7

Digital Video Data Rates

- Low quality or talking heads
 - 64 kb/s to 774 kb/s
 - H.261 or low-end MPEG
- Business quality
 - 1 Mb/s to 2.5 Mb/s
 - MPEG, DVI, software codecs, low-end JPEG
- High Quality
 - 3 Mb/s to 8 Mb/s
 - MPEG and JPEG (also TrueMotion)
- Studio quality
 - 10 Mb/s to 45 Mb/s
 - MPEG, JPEG, proprietary

Fouad Tobagi

8

High Bandwidth Requirement

Type	Bandwidth per Stream	20 users
Low end	64 kbps - 384 kbps (teleconferencing)	3 Mbps
Corporate video	1 Mbps - 2 Mbps (training, video mail)	30 Mbps
High quality	3 Mbps - 8 Mbps (presentations, video editing)	100 Mbps
Advanced	8 Mbps - 20 Mbps (advanced professional, HDTV)	2 Gbps

Fouad Tobagi

9

Guaranteed Bandwidth Requirement

- Stream-oriented applications
 - Bandwidth to be available on a continuous basis
- Degree of burstiness depends on
 - encoding scheme / content
 - latency / buffering

Fouad Tobagi

10

Latency Requirement

- Interactive Applications (e.g. videoconferencing)
 - end-to-end delay < 100ms
 - Overhead for encoding/decoding:
 - CBR: 50 - 250 ms
 - VBR: a few ms - 100 ms
- Non-interactive Applications
 - No stringent delay requirement (e.g. broadcast movies)
 - Some delay requirement (e.g. broadcast news)

Latency and buffering are related

Fouad Tobagi

11

Multicasting Requirement

- Many multimedia applications involve multiple participants
- Size of multicast depends on applications
 - Videoconferencing (3-4 participants, many-to-many)
 - group meeting (10's of participants, one-to-many)
 - video broadcasting (100's of participants, one-to-many)

Fouad Tobagi

12

Use of Ethernets for Multimedia Applications

- Ethernet does not
 - provide bounded delays
 - distinguish between different traffic types
- However, it is one of the most widely deployed LAN schemes today.

How well can Ethernets support multimedia communications?

Fouad Tobagi

13

Video on Ethernet

Dmax (ms)	Lmax	V=64kb/s		V=384kb/s		V=1536kb/s	
		Nmax	N.U.	Nmax	N.U.	Nmax	N.U.
20	0.001	55	35%	14	54%	4	61%
20	0.01	64	41%	17	65%	5	77%
100	0.001	89	57%	18	69%	5	77%
100	0.01	104	67%	20	77%	5	77%
Bandwidth Limit		156		26		6	

Dmax: Maximum tolerable delay

Lmax: Maximum tolerable packet loss rate

V : Video stream bandwidth


Nmax: Maximum number of streams that can be supported while meeting the delay and loss constraints

N.U.: Network utilization

Fouad Tobagi

14


Integrated Services on Ethernet

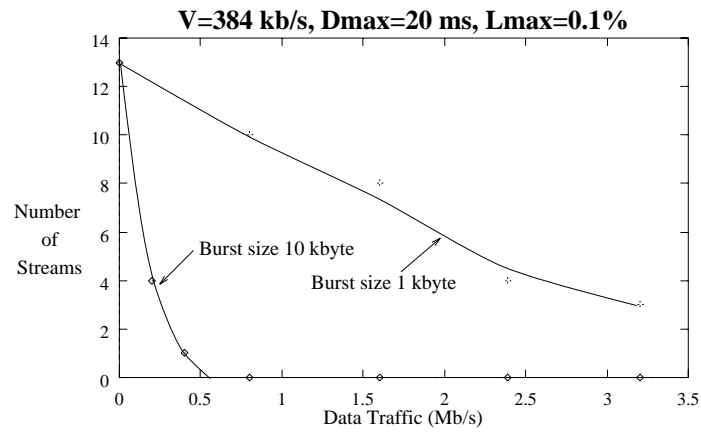

Fouad Tobagi

15


Integrated Services on Ethernet

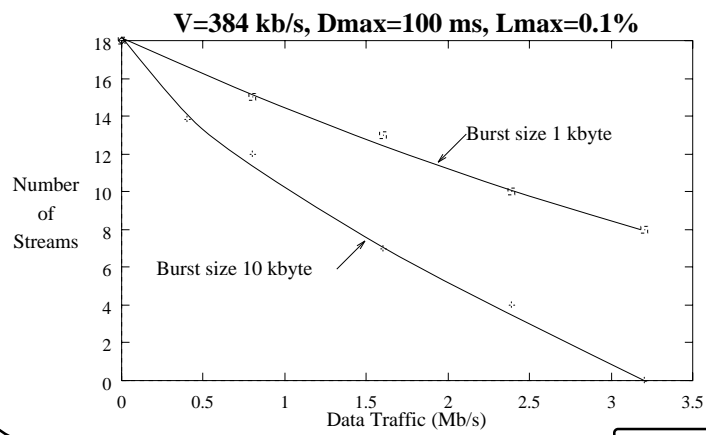

Fouad Tobagi

16


Integrated Services on Ethernet

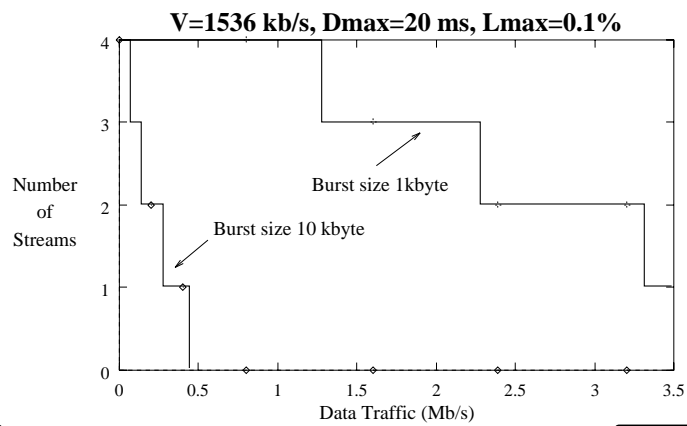

Fouad Tobagi

17

Integrated Services on Ethernet

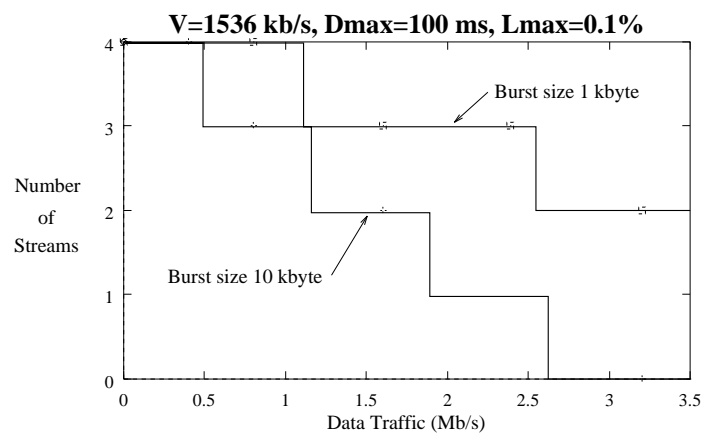

Fouad Tobagi

18

100Base-T Performance

Number of Streams Supportable


Dmax (ms)	Lmax	10Base-T						100Base-T			
		V=64kb/s		V=384kb/s		V=1536kb/s		V=384kb/s		V=1536kb/s	
		Nmax	N.U.	Nmax	N.U.	Nmax	N.U.	Nmax	N.U.	Nmax	N.U.
20	0.001	55	35%	14	54%	4	61%	138	53%	43	66%
20	0.01	64	41%	17	65%	5	77%	160	61%	49	75%
100	0.001	89	57%	18	69%	5	77%	180	69%	49	75%
100	0.01	104	67%	20	77%	5	77%	205	79%	52	80%
Bandwidth Limit		156		26		6		260		65	

Fouad Tobagi

19

100Base-T Performance


Integrated Video and Data Services

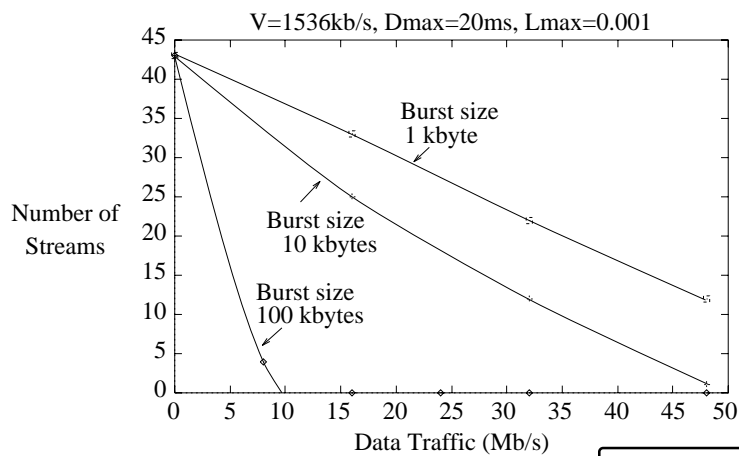

Fouad Tobagi

20


100Base-T Performance Integrated Video and Data Services

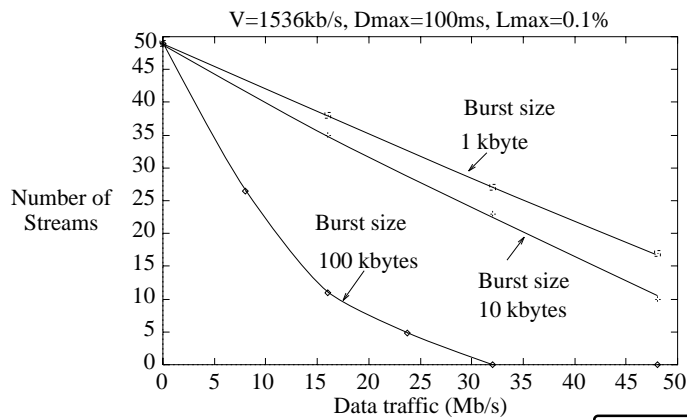

Fouad Tobagi

21

Packet Loss Causes Glitches in Video

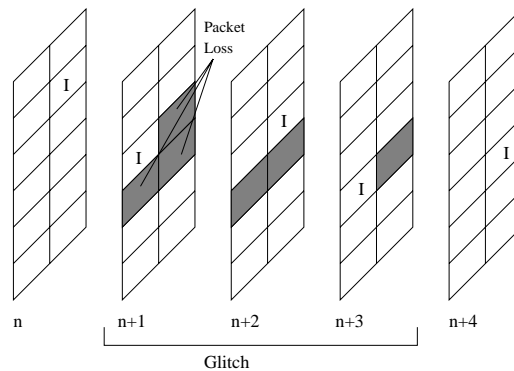

- The effect of packet loss may persist multiple frames, depending on interdependency among frames
 - Multiple packets may contribute to the same glitch
- => packet loss rate is not an accurate measure of network performance

Fouad Tobagi

22

Evaluation of Ethernets Carrying Video Traffic

- 10Base-T and 100Base-T segments simulated
- Real video sequences used
- CBR video, H.261 encoding
- End-to-end delays taken into account
- Dependence among frames taken into account; network performance measured in terms of glitches
- 2 packetization schemes considered:
 - Constant Size and Rate Packetization (CSRP)
 - Variable Size and Rate Packetization (VSRP)
- Effect of bursty and non-bursty data traffic on video examined

Fouad Tobagi

23

Video on a 10Base-T Segment

D_{max} (ms)	g_{max} (per min.)	N_{max} (susie)		N_{max} (miss america)		N_{max} (table tennis)	
		384 kb/s	1536 kb/s	384 kb/s	1536 kb/s	384 kb/s	1536 kb/s
20	0.1	0	0	0	0	0	0
	1	0	0	0	0	0	0
60	0.1	11 (42%)	4 (61%)	11 (42%)	4 (61%)	6 (23%)	2 (30%)
	1	13 (50%)	5 (77%)	13 (50%)	5 (77%)	10 (38%)	3 (46%)
100	0.1	13 (50%)	5 (77%)	13 (50%)	5 (77%)	12 (46%)	4 (61%)
	1	17 (65%)	5 (77%)	17 (65%)	5 (77%)	17 (65%)	5 (77%)
250	0.1	18 (69%)	5 (77%)	18 (69%)	5 (77%)	17 (65%)	5 (77%)
	1	20 (77%)	5 (77%)	20 (77%)	5 (77%)	19 (73%)	5 (77%)
500	0.1	19 (73%)	5 (77%)	19 (73%)	5 (77%)	19 (73%)	5 (77%)
	1	20 (77%)	5 (77%)	20 (77%)	5 (77%)	20 (73%)	5 (77%)
Bandwidth limit		26	6	26	6	26	6

Maximum number of streams supportable for CSRP (B/V=50 ms)

Fouad Tobagi

24

Video on a 10Base-T Segment

D_{max} (ms)	g_{max} (per min.)	N_{max} (susie)		N_{max} (miss america)		N_{max} (table tennis)	
		384 kb/s	1536 kb/s	384 kb/s	1536 kb/s	384 kb/s	1536 kb/s
20	0.1	9 (36%)	4 (61%)	9 (36%)	4 (61%)	8 (31%)	4 (61%)
	1	12 (46%)	4 (61%)	12 (46%)	4 (61%)	12 (46%)	4 (61%)
60	0.1	14 (54%)	4 (61%)	14 (54%)	4 (61%)	14 (54%)	4 (61%)
	1	16 (61%)	5 (77%)	16 (61%)	5 (77%)	16 (61%)	5 (77%)
100	0.1	15 (58%)	5 (77%)	15 (58%)	5 (77%)	15 (58%)	5 (77%)
	1	18 (69%)	5 (77%)	18 (69%)	5 (77%)	18 (69%)	5 (77%)
250	0.1	19 (73%)	5 (77%)	19 (73%)	5 (77%)	19 (73%)	5 (77%)
	1	20 (77%)	5 (77%)	20 (77%)	5 (77%)	20 (77%)	5 (77%)
500	0.1	19 (73%)	5 (77%)	19 (73%)	5 (77%)	19 (73%)	5 (77%)
	1	20 (77%)	5 (77%)	20 (77%)	5 (77%)	20 (77%)	5 (77%)
Bandwidth limit		26	6	26	6	26	6

Maximum number of streams supportable for VSRP (B/V=50 ms)

Fouad Tobagi

25

Video on a 100Base-T Segment

D_{max} (ms)	g_{max} (per min.)	N_{max} (susie)		N_{max} (miss america)		N_{max} (table tennis)	
		384 kb/s	1536 kb/s	384 kb/s	1536 kb/s	384 kb/s	1536 kb/s
20	0.1	0	0	0	0	0	0
	1	0	0	0	0	0	0
60	0.1	140 (54%)	40 (61%)	141 (54%)	40 (61%)	136 (52%)	38 (58%)
	1	151 (58%)	42 (65%)	151 (58%)	42 (65%)	145 (56%)	41 (67%)
100	0.1	168 (65%)	42 (65%)	168 (65%)	42 (65%)	168 (65%)	42 (65%)
	1	185 (71%)	47 (72%)	185 (71%)	47 (72%)	185 (71%)	47 (72%)
250	0.1	168 (65%)	42 (65%)	168 (65%)	42 (65%)	168 (65%)	42 (65%)
	1	185 (71%)	47 (72%)	185 (71%)	47 (72%)	185 (71%)	47 (72%)
Bandwidth limit		260	65	260	65	260	65

Maximum number of streams supportable for CSR (B/V=50 ms)

Fouad Tobagi

26

Video on a 100Base-T Segment


D_{max} (ms)	g_{max} (per min.)	N_{max} (susie)		N_{max} (miss america)		N_{max} (table tennis)	
		384 kb/s	1536 kb/s	384 kb/s	1536 kb/s	384 kb/s	1536 kb/s
20	0.1	118 (45%)	31 (47%)	118 (45%)	31 (47%)	115 (44%)	30 (46%)
	1	135 (52%)	35 (54%)	135 (52%)	35 (54%)	134 (51%)	35 (54%)
60	0.1	167 (64%)	42 (65%)	167 (64%)	42 (65%)	167 (64%)	42 (65%)
	1	186 (71%)	46 (71%)	186 (71%)	46 (71%)	186 (71%)	46 (71%)
100	0.1	172 (66%)	43 (66%)	172 (66%)	43 (66%)	172 (66%)	43 (66%)
	1	190 (73%)	48 (74%)	190 (73%)	48 (74%)	190 (73%)	48 (74%)
250	0.1	172 (66%)	43 (66%)	172 (66%)	43 (66%)	172 (66%)	43 (66%)
	1	190 (73%)	48 (74%)	190 (73%)	48 (74%)	190 (73%)	48 (74%)
Bandwidth limit		260	65	260	65	260	65

Maximum number of streams supportable for VSRP ($B/V=50$ ms)

Fouad Tobagi

27

Integrated Services: 10Base-T

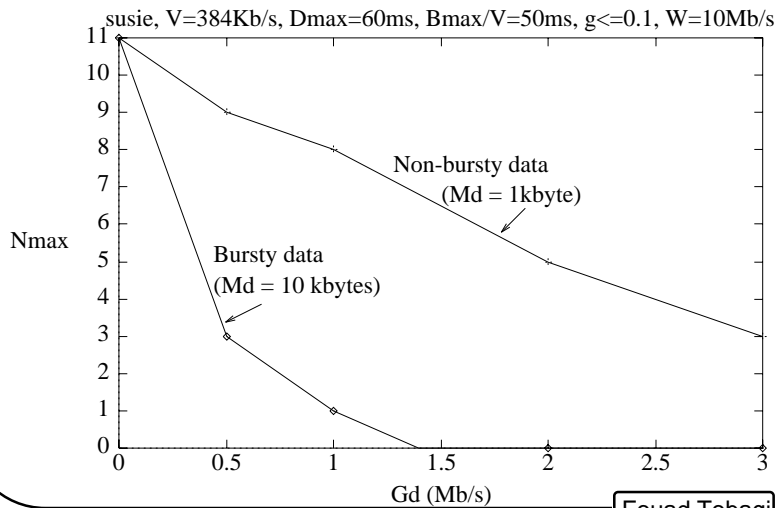


Fouad Tobagi

28

Integrated Services: 10Base-T

susie, $V=384\text{Kb/s}$, $D_{\max}=100\text{ms}$, $B_{\max}/V=50\text{ms}$, $g \leq 1$ (per min.), $W=10\text{M}$

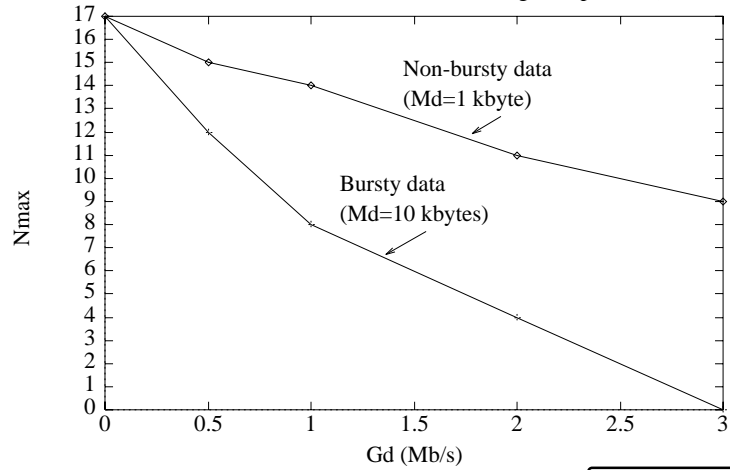


Fouad Tobagi

29

Integrated Services: 100Base-T


susie, $V=384$ kb/s, $D_{\max}=60\text{ms}$, $B_{\max}/V=50\text{ms}$, $g \leq 0.1$, $W=100\text{Mb/s}$

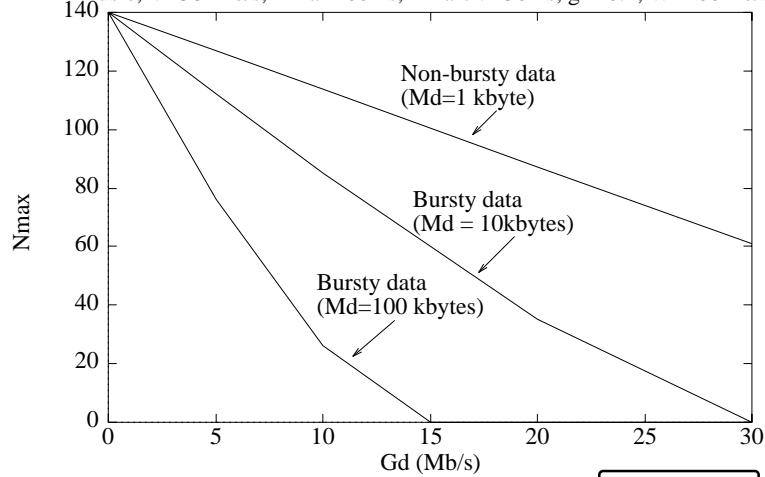

Fouad Tobagi

30

Integrated Services: 100Base-T

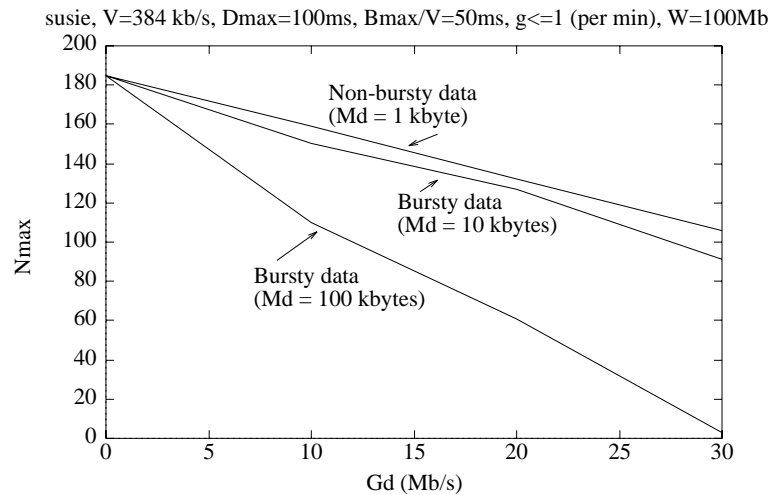

Fouad Tobagi

31

Today's IEEE 802.1

- Single Spanning Tree
 - Avoids broadcast / multicast loops
 - Multiple copies with unicast
- Transparent Bridging
 - Stations relocation without registration: "Learning bridges"
- Multicast via Broadcast
 - Multicast traffic assumed to be low
 - Simplicity & transparency
- MIB

Fouad Tobagi

32

Media Access Control Protocols

- Guaranteeing bandwidth on a continuous basis
- Meeting latency constraints (100 ms or less)
- Integrated services
 - IEEE 802.3 (Ethernet)
 - Contention-based, no priority function
 - IEEE 802.5 (Token-Ring)
 - Priority function available
 - FDDI (ANSI X3T9.5)
 - Support for synchronous traffic
 - Iso-Ethernet (IBM/National)
 - Support for isochronous traffic


Fouad Tobagi

33

Implications of High Bandwidth Requirement

High Bandwidth \Rightarrow Switching Hubs


Interconnected Switching Hubs \Rightarrow Large-sized subnet

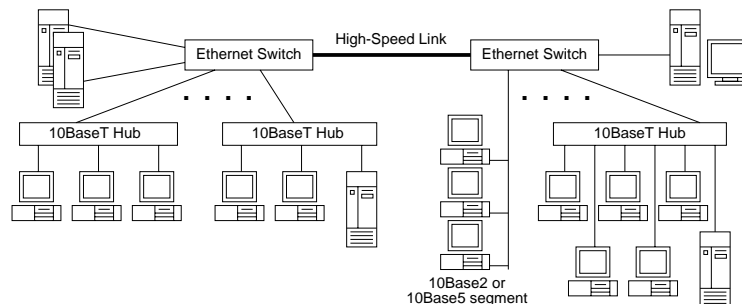

Fouad Tobagi

34


Limits on Subnetwork Throughput

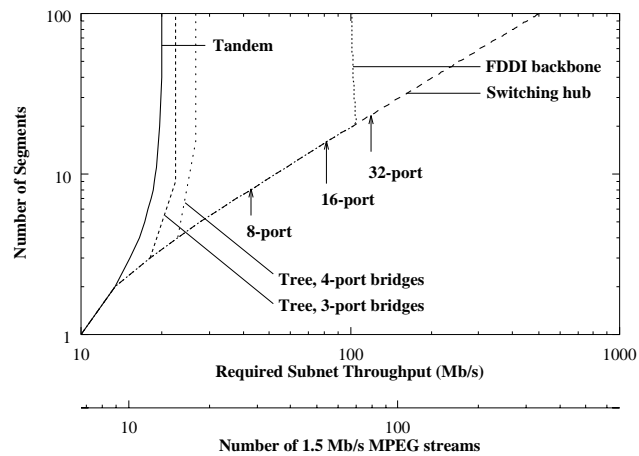

Fouad Tobagi

35

Possible Campus Network Infrastructure

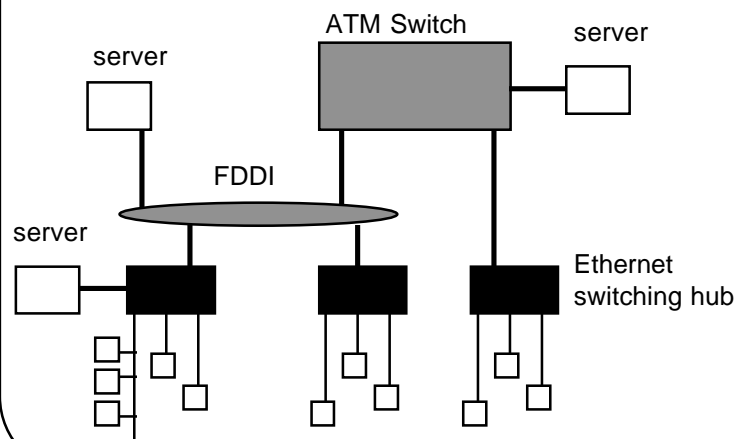

Fouad Tobagi

36

Implications of Large-Sized Subnets

- Large number of addresses stored in bridge tables
- Deployment of stations on the ports: avoidance of bottlenecks

Fouad Tobagi

37

Implications of Guaranteed Bandwidth and Latency

Guaranteed BW
& Latency



Admission Control

Admission Control: No more sessions are permitted on a given resource (e.g. an Ethernet segment) than it can accommodate

- Requires knowledge in users' locations, current sessions, and aggregate bandwidth
- Needs to work with multicast

Fouad Tobagi

38

Implications of Guaranteed Bandwidth and Latency (cont.)

- Reservation needs to be done end-to-end for overall effectiveness
- Switches mostly do not have the capacity to support the management necessary to guarantee bandwidth due to wire-speed requirement
- Admission control by itself cannot guarantee bandwidth

==> A simpler mechanism to provide more predictable behavior as traffic increases?

Fouad Tobagi

39

Implications of Guaranteed Bandwidth and Latency (cont.)

Guaranteed BW
& Latency



Traffic Types Differentiation

- Data traffic cannot have admission control
 - must be prevented from affecting video traffic (prioritization?)

Fouad Tobagi

40

Multicasting of Video / Audio Streams Must Be Done Efficiently

Example:


- An Ethernet switch
 - 128 ports
 - 1.28 Gb/s aggregate throughput (hence non-blocking)
- 4 mulitcast video streams
 - 2 Mb/s each → 8 Mb/s total

If broadcasting is used, the whole network bandwidth is taken

Fouad Tobagi

41


Example of Required Backbone Bandwidth

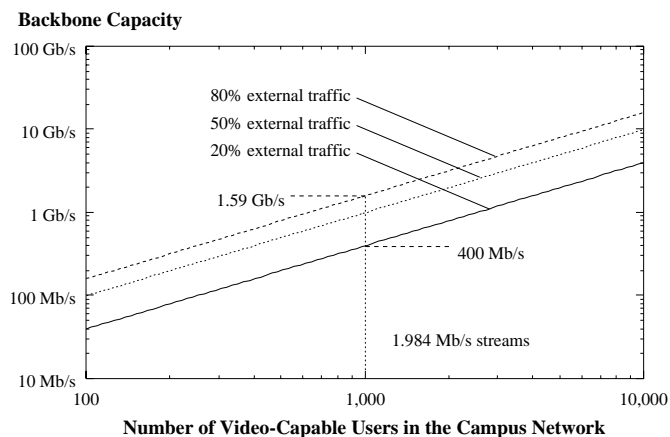

Fouad Tobagi

42

Implications of Multicasting Requirement

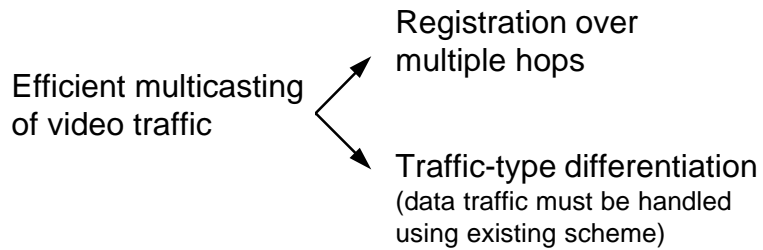

Fouad Tobagi

43

Conclusions

- Admission Control
 - MIBs must be defined to identify network resources, keep track of sessions, etc.
- Filtering
 - Explicit requests
 - Propagation of information in a multi-switch environment
- Traffic Types Differentiation
 - Based on ? (addresses?)
- Single Spanning Tree
 - Multiple spanning trees?

Fouad Tobagi

44