

# 802.1aq Shortest Path Bridging Recap and Status

By

Don Fedyk, Mick Seaman,  
Janos Farkas, Ali Sajassi

# History

- 802.1aq SPB started in 2005
- 3 Draft Revisions (0.1,0.3,0.4)
- Last years revision introduces PBB networks and capitalizing PBB networks
- Draft 1.0 currently with the editors

# PAR



- Original Scope was VLAN Bridges
  - Shortest Path within a region
  - Interwork with RSTP, MSTP bridges
  - Scope
    - This standard specifies shortest path bridging of unicast and multicast frames, including protocols to calculate multiple active topologies that can share learnt station location information, and support of a VLAN by multiple, per topology, VLAN identifiers (VIDs).
  - Compatibility
    - This amendment will not change the conformance of IEEE Std 802.1Q to Std 802. Overview and Architecture, or its relationship to that specification.

# Applicability

IEEE 802.1aq

Shortest Path Bridging (SPB)

Shortest Path Backbone Bridging (SPBB)

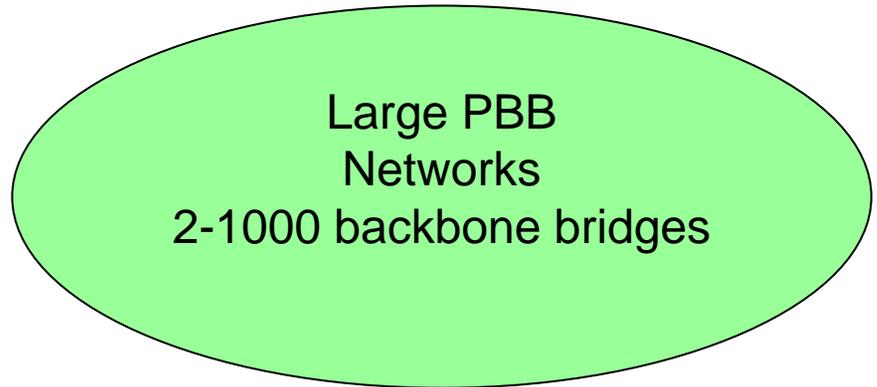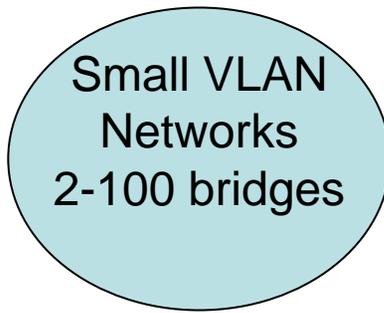


Plug and play  
Efficient  
Low delay  
Backwards Compatible

E-Line, E-Tree, E-LAN Services

Carrier Grade  
Fast convergence  
Efficient use of resources  
B-VLAN Partitioned Forwarding Compatible

Provider E-Line, E-Tree, E-LAN Services

# IEEE 802.1aq

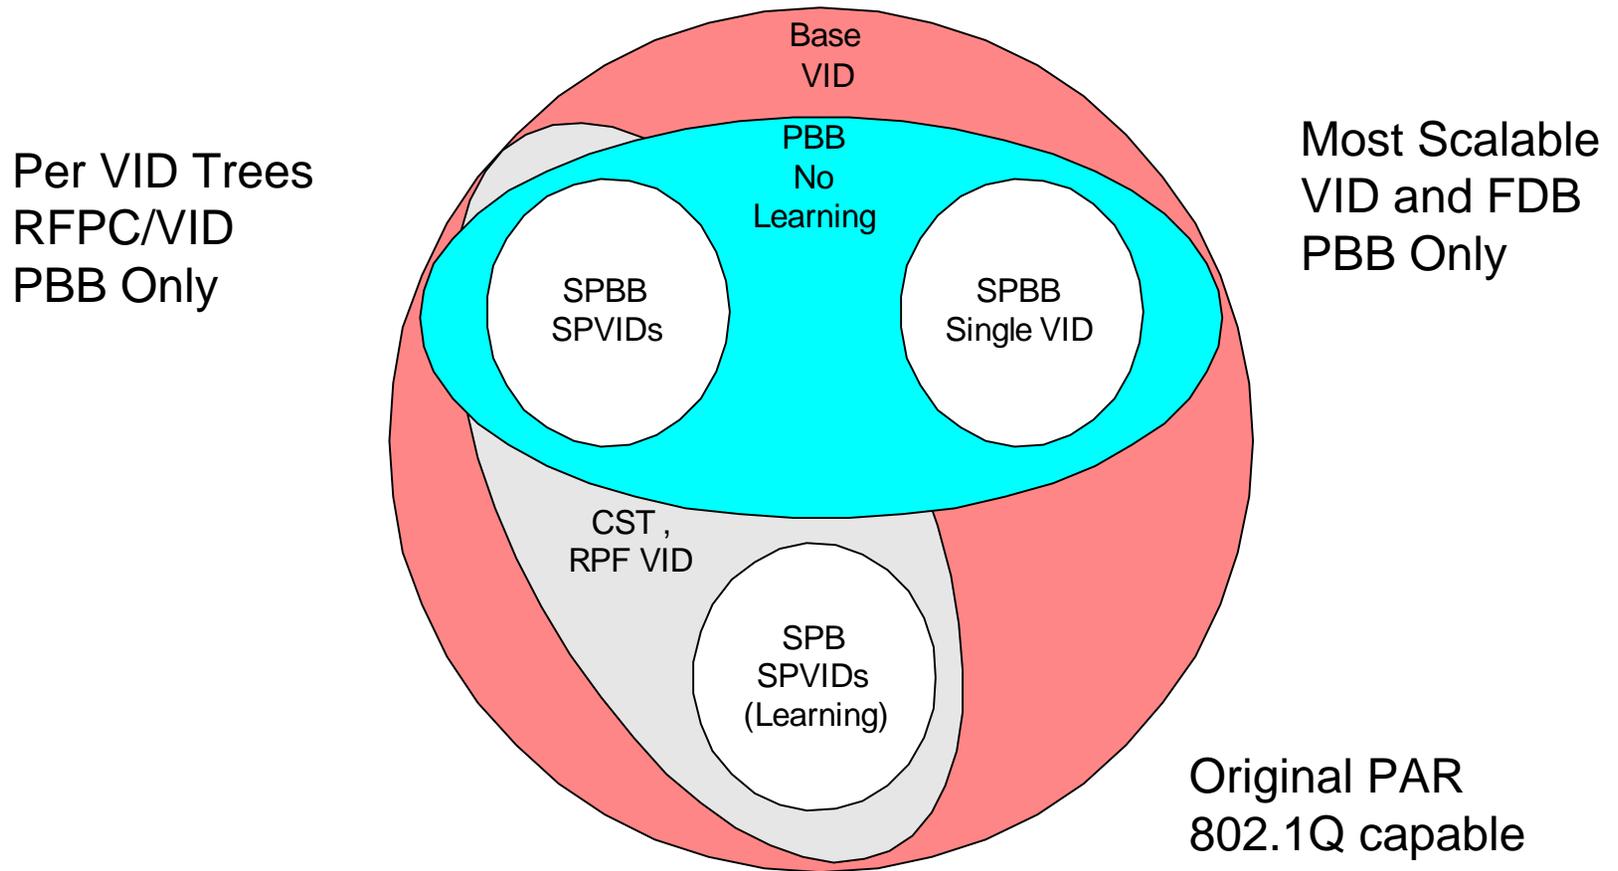

**Currently Three Variants**

# Link State and Spanning Tree

- Link State brings advantages by capitalizing on technology change.
  - Larger Cheaper Memory
  - Faster Processors
  - Higher Capacity Links
  - Result is Shortest path routing with speed and scale.
  - Link State comes at a cost of more hardware but offers more decoupled distributed forwarding state (a fact we need to account for when doing loop prevention.)

# SPB

- Only supports IS-IS Link state protocol (instead of MSTP)
- SPB (Shortest Path Bridging) (802.1Q compliant)
  - must use VID, don't own the C-MAC
  - Solution Attributes
    - Uses VID Trees, one source per (edge) bridge, distributed in IS-IS
    - Defines a SPT (Shortest Path Tree) Region, def by "Base VID"
    - SVL learning of unicast forwarding required
  - Solution Requirements
    - May Interwork at edges with RSTP, MSTP
    - The region may default to a single instance MSTP (associated with the "Base VID") if the VID allocation fails or detects errors

# SPBB

- SPBB (Shortest Path Backbone Bridging)
  - IS-IS Control
  - May use VID Trees or a Single VID for an SPT Region
  - Does not use learning of B-MACs
    - Provider addresses will all be known allows for more efficient flooding (no B-MAC broadcast storms), ingress check, Reduction in forwarding space Shared Forwarding, Efficient Multicast and faster convergence Link State.
  - Works Ships in the Night with RSTP, MSTP in the B-MAC space.
    - Partitioned B-VID Space
    - No interworking with RSTP, MSTP

# SPB - SPBB progress

## Lots of alignment

### Attribute

### Status

---

VLAN Topology	Support shortest path Trees
VLAN Partitioning	Aligned
Link state topology	Use IS-IS
Mesh Networking	Support shortest path trees
Forwarding: backwards compatibility	Use a VID+DMAC context
Control plane objects	Similar requirements
SPT computation	Similar requirements
Multicast Groups	SPB – MRP SPBB uses IS-IS
Multicast and Unicast Congruency	Aligned
Forward & Reverse Path Congruency	Aligned

# SPBB progress

## Lots of alignment

### Attribute

### Status

VLAN Partitioning

Use a logical B-VLAN

No Learning

Use IS-IS to populate FDB

Forwarding: backwards compatibility

Use a VID+DMAC context

SPT computation

Similar requirements

Number of Trees for Unicast Forwarding

Use one tree per source BEB

Number of Trees for Multicast Forwarding

Use one per (S,G)

Multicast Trees

Use pruning of the broadcast source tree

Multicast Groups

Use Groups to represent multiple I-SIDs

Single path per VID to a destination

Aligned No per hop ECMP

# Problems to Solve

## Where are we now?

- Topology Distribution
  - IS-IS ..... Only IS-IS
- Loop Prevention
  - TAP or SPBB Multicast Loop Prevention ..... Evaluating options
- Loop Mitigation
  - Optional Forwarding change Ingress Check ..... Evaluating options
- SPVID allocation
  - Leverage link State ..... Need to Discuss
- SPBB
  - Multicast Source Tree identification
    - SPVID or B-VID&Source DA ..... Document Both
    - MRP and Link State ..... Need to Discuss
- Path Computation ..... Need to Discuss
  - Convergence
- Provisioning ..... TBD
  - Tree types (Shared Trees or Tree per source, etc)
  - MIBs
  - Mis-provisioning

# Loop Prevention/Loop Mitigation

- Prevention (SPB & SPBB Multicast & SPB Unicast)
  - Control plane handshakes
  - Some Blocking
  - Use this for Multicast TAP & IS-IS digests + Handshake
- Mitigation (SPBB Unicast)
  - TTL
    - Needs hardware change and Frame change
    - Kills all unicast loops after some number of hops
    - Currently out of Scope
  - Ingress Check
    - Needs hardware change (smaller than TTL)
    - Stops most unicast loops
    - Latest Thinking (source based (SA or VID))

# Loop Prevention and Loop Mitigation Current View

	SPB Multicast Unicast	SPBB Multicast	SPBB Unicast
Loop Prevention	Must	Must	None or Optional
Loop Mitigation	None	None	Data Plane Ingress check*


\* Data Plane Ingress checking optional if Loop Prevention is active

# No SPBB Unicast Mitigation Implications

- SPBB Unicast forwarding can:
  - Work with no loops
  - Temporally Break with no loops
  - Temporally Break with a loop
    - This is the case of interest what happens?
      - Loops of 3 or more nodes
      - These loops are transient and short lived
      - Could use Unicast prevention wait for handshake



# Control Plane Scope

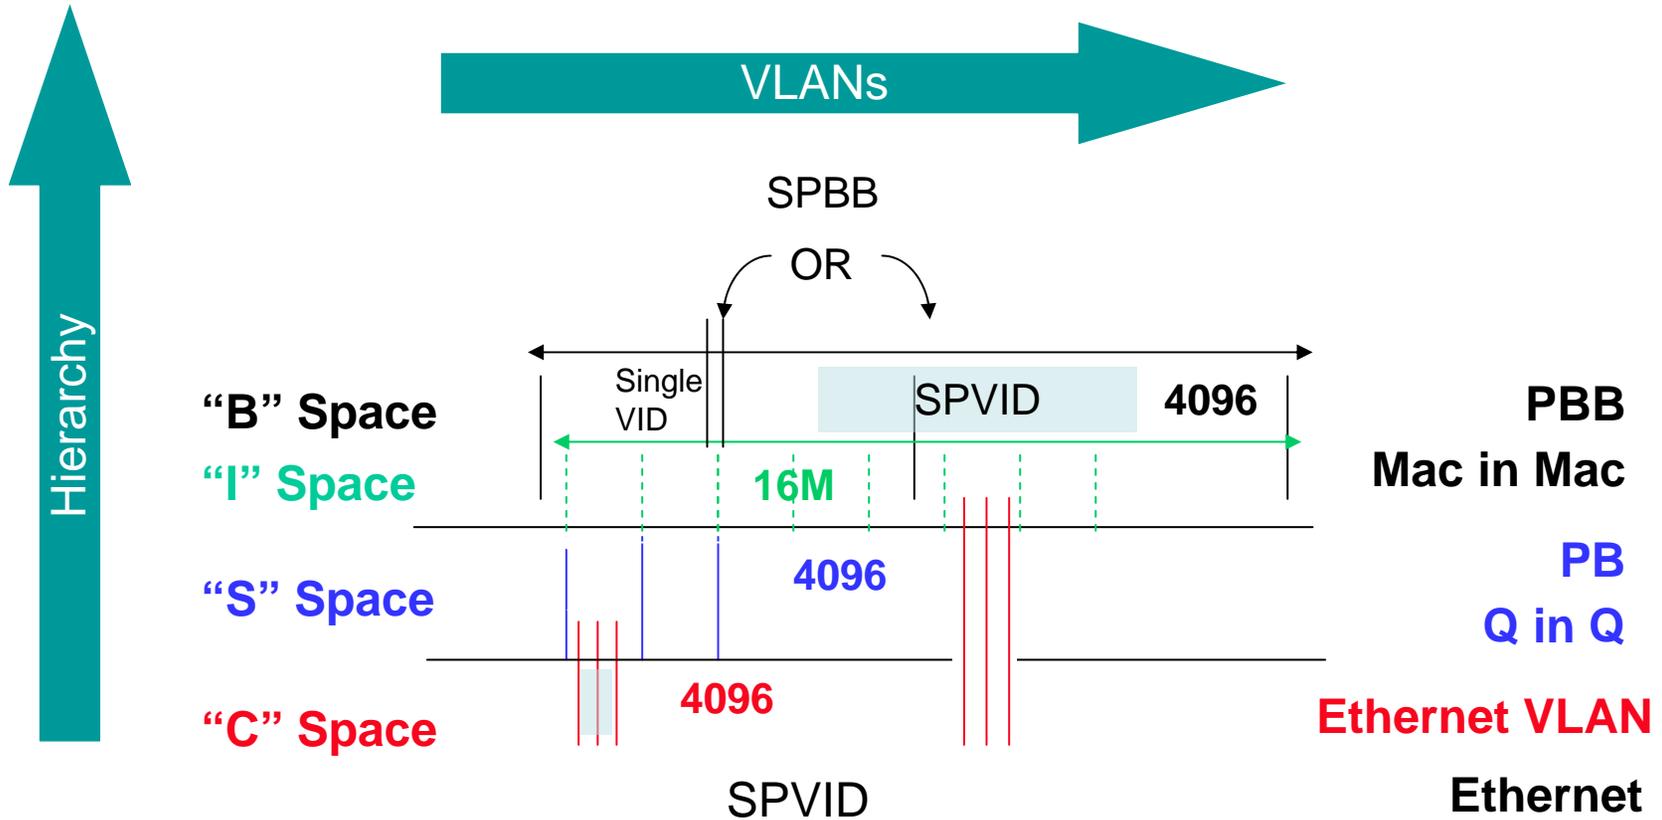

SPB and SPBB Different Operating Spaces

# VLAN Usage and Topology

