

Project	IEEE 802.16 Broadband Wireless Access Working Group < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	MS Handover with transparent RS	
Date Submitted	2006-01-08	
Source(s)	<p>Kanchei (Ken) Loa, Yi-Hsueh Tsai, Chih-Chiang Hsieh, Yung-Ting Lee, Hua-Chiang Yin, Shiann-Tsong Sheu, Frank C.D. Tsai, Youn-Tai Lee, Heng-Iang Hsu</p> <p>Institute for Information Industry 8F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan.</p> <p>[add co-authors here]</p>	<p>Voice: +886-2-2739-9616 <a href="mailto:loa@iii.org.tw">loa@iii.org.tw</a></p>
Re:	IEEE 802.16j-06/034: "Call for Technical Proposals regarding IEEE Project P802.16j"	
Abstract	This contribution proposes procedures for MS Handover with transparent RS	
Purpose	Text proposal for 802.16j Baseline Document	
Notice	<p>This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.</p>	
Release	<p>The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.</p>	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures &lt;<a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a>&gt;, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance</p>	

---

with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:chair@wirelessman.org> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

---

## MS Handover with transparent RS

### Text Proposal


#### 6.3.22 MAC layer handover procedures

##### [6.3.22.5 Relay support for MS handover](#)

##### [6.3.22.5.1 MS handover with transparent RS](#)

##### [6.3.22.5.1.1 Network topology advertisement](#)

A serving MR-BS shall broadcast information about the network topology using the MOB\_NBR-ADV message to MS for cell reselection consideration.

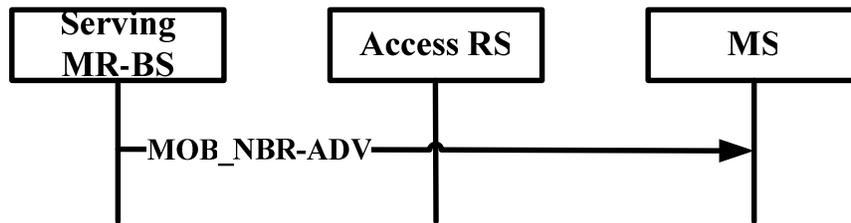

[Figure xxx – Network Advertisement](#)

##### [6.3.22.5.1.2 MS scanning of neighbor access stations](#)

A serving MR-BS may allocate time intervals to MS through access RS for the purpose of MS seeking and monitoring suitability of neighbor access stations as targets for HO.

Upon receiving MOB\_SCN-REQ message from MS through access RS, the serving MR-BS may negotiate over the backbone with a BS recommended for Association allocation unicast ranging opportunities if the candidate access station is located at another MR-BS cell.

Upon reception of the MOB\_SCN-REQ message through access RS, the serving MR-BS shall respond with a MOB\_SCN-RSP message through access RS. The serving MR-BS may also send MOB\_SCN-RSP message unsolicited through access RS.

The serving MR-BS may buffer the incoming data addressed to the MS during the scanning interval and transmit that data after the scanning interval during any interleaving interval or after exit of the Scanning mode.

If the serving MR-BS receives through access RS a MAC PDU message during any scanning interval from an MS that is supposed to be in Scanning Mode, the serving MR-BS shall assume that the MS is no longer in Scanning Mode. The group of intervals is terminated at any time if the MS sends MOB\_SCN-REQ message to the serving MR-BS through access RS or serving MR-BS sends MOB\_SCN-RSP message to MS through access RS during any interleaving interval with Scan Duration set to zero.

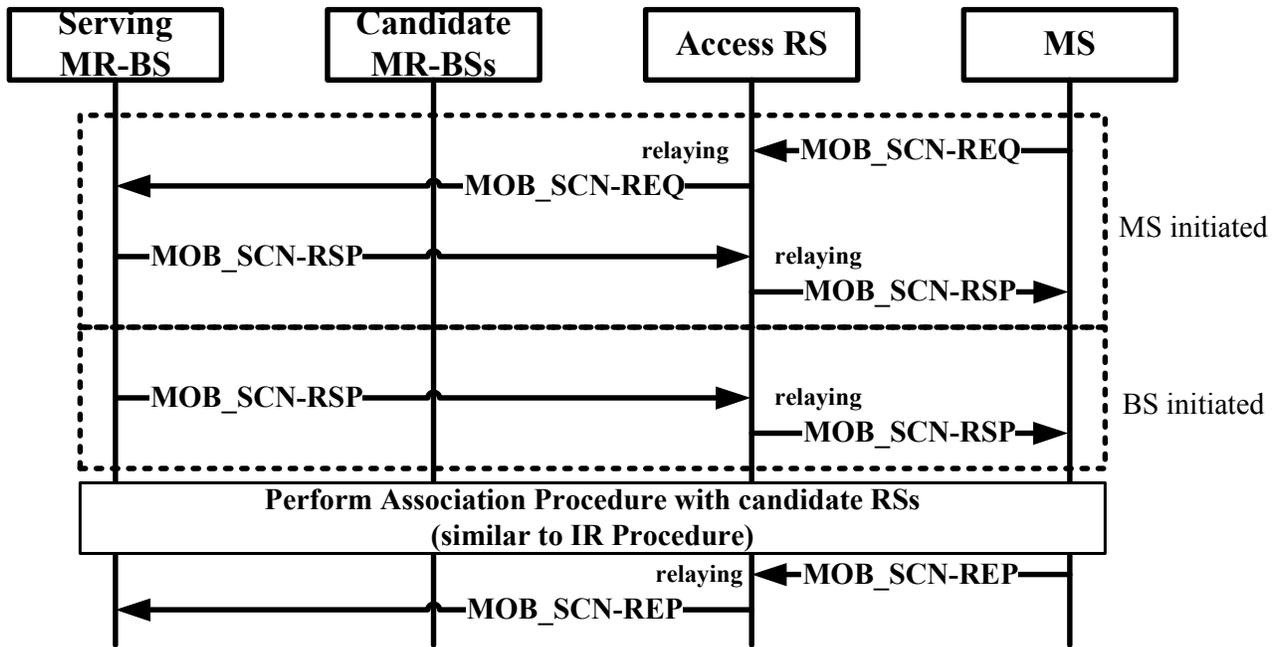


Figure xxx –MS scanning of neighbor access stations

6.3.22.5.1.3 Association procedure

The MR-BS may direct the MS through access RS to associate with recommended access stations by setting scanning type to 0b010 or 0b011 in MOB\_SCN-RSP message.

6.3.22.5.1.3.1 Association Level 0—Scan / Association without coordination

To support a MS perform Association Level 0, the process is similar to that defined in the section 6.3.22.1.3.1 (Association Level 0—Scan / Association without coordination).

6.3.22.5.1.3.2 Association Level 1—Association with coordination

To support a MS perform Association Level 1, the process is similar to that defined in the section 6.3.22.1.3.2 (Association Level 1—Association with coordination).

6.3.22.5.1.3.3 Association Level 2—Network Assisted Association Reporting

To support a MS perform Association Level 2, the process is similar to that defined in the section 6.3.22.1.3.3 (Association Level 2—Network Assisted Association Reporting).

6.3.22.5.1.4 Handover Decision and Initiation

A handover begins with a decision for an MS to handover from a serving access station to a target access station. The decision may originate either at the MS, the serving MR-BS, or on the network. The HO may proceed with a notification through either MOB\_MSHO-REQ or MOB\_BSHO-REQ messages.

The serving MR-BS upon reception of the MOB\_MSHO-REQ message through access RS, the serving MR-BS shall respond with a MOB\_BSHO-RSP message through access RS. The serving MR-BS may also send MOB\_BSHO-REQ message through access RS.

As an acknowledgement to the MOB\_BSHO-RSP or MOB\_BSHO-REQ message, the MS should send a MOB\_HO-IND message through access RS.

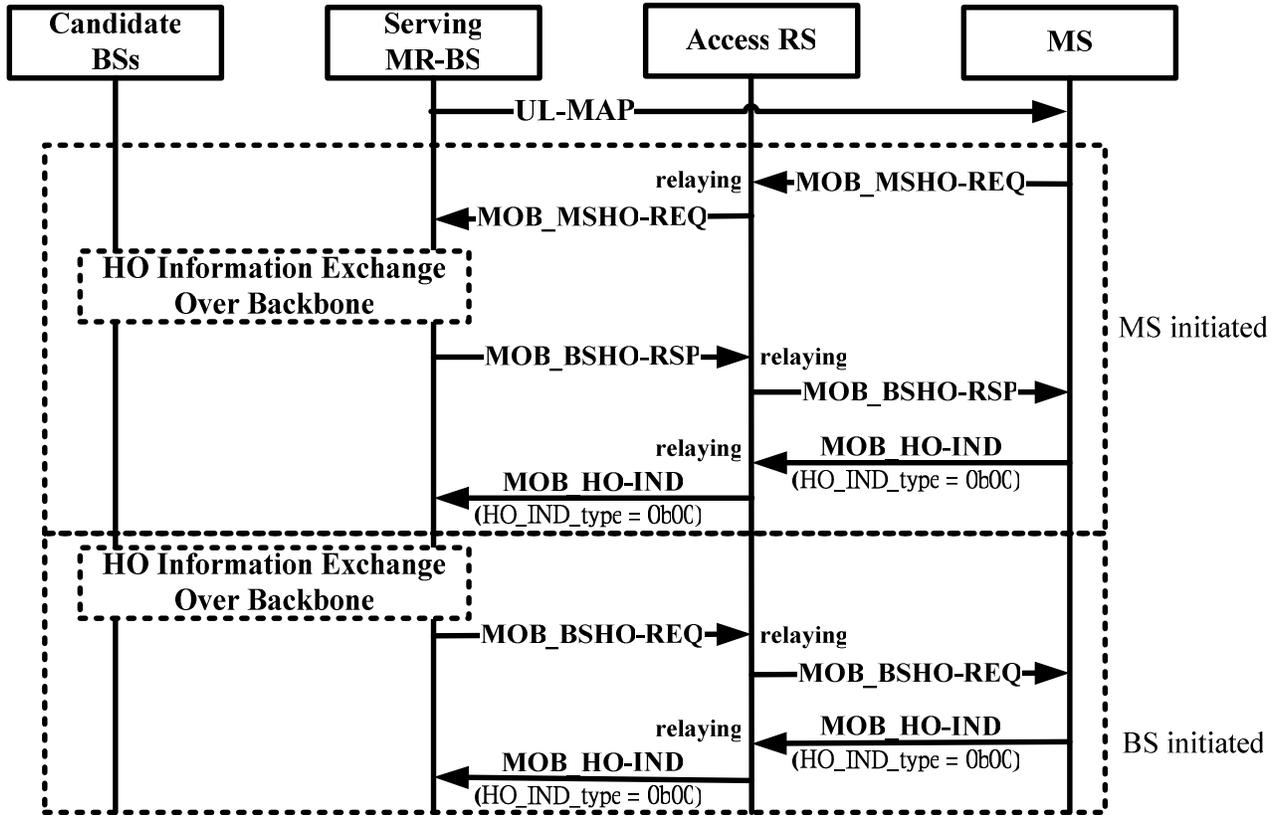


Figure xxx –MS Handover Initial and Decision

6.3.22.5.1.5 Handover Ranging procedure

MS Handover Ranging with RS is defined in the section xxx (MS Handover Ranging with RS).

6.33.22.5.1.6 Network Entry/Termination

After an MS or serving MR-BS has initiated an HO using either MOB\_MSHO-REQ or MOB\_BSHO\_REQ message, the MS may cancel HO at any time.

The cancellation shall be made through transmission of a MOB\_HO-IND messages the HO cancel option (HO\_IND\_type=0b01).

When MS transmits and serving BS receives MOB\_HO-IND message through access RS with the HO cancel option (HO\_IND\_type=0b01) during Resource Retain Time (when Resource Retain Flag=1), regardless of MS attempt at HO, the MS and serving BS shall resume Normal Operation communication.

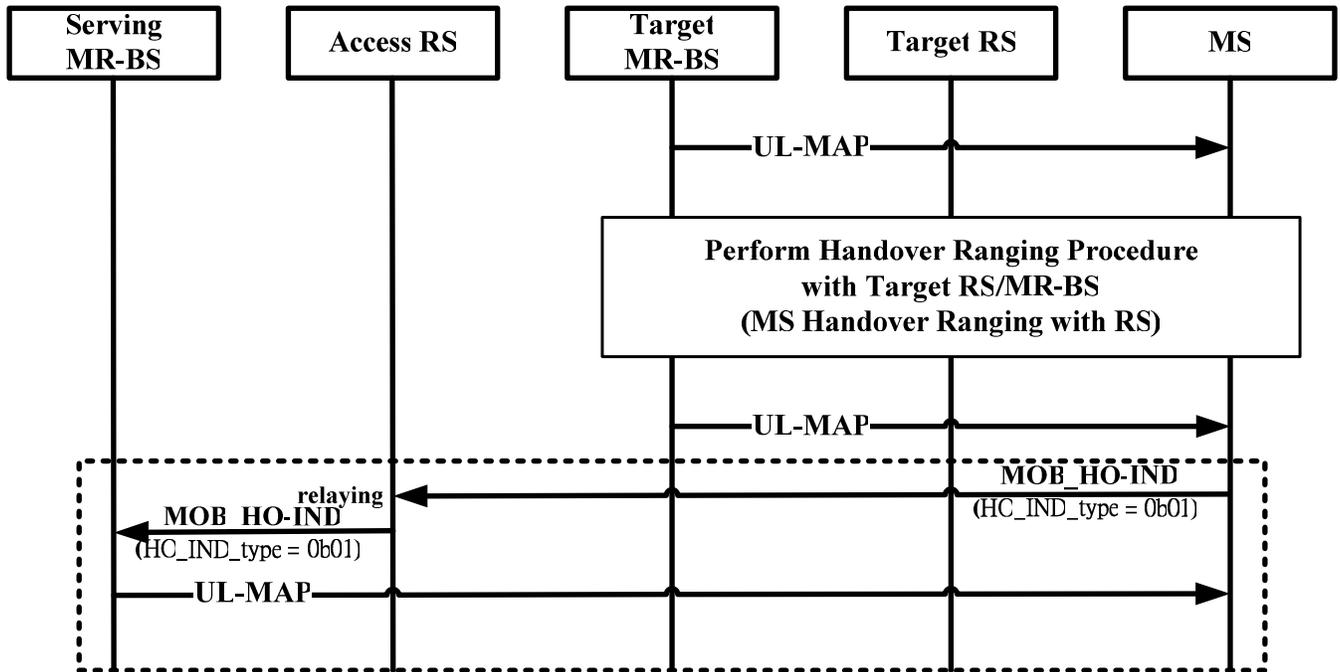


Figure xxx –MS Network Entry/Termination of Handover