




# 100Gb/s per Lane for Electrical Interfaces and Electrical PHYs Study Group: Status and Work

BETH KOCHUPARAMBIL – ACTING STUDY GROUP CHAIR

EMPLOYED BY AND AFFILIATED WITH CISCO SYSTEMS



## REMINDER TO BE FAMILIAR WITH POLICY

- IEEE PRE-PAR Patent Policy - <https://development.standards.ieee.org/myproject/Public/mytools/mob/preparslides.pdf>
- IEEE 802 Participation – <https://mentor.ieee.org/802-ec/dcn/17/ec-17-0093-05-0PNP-ieee-802-participation-slide-ppt.ppt>

# OUTLINE

- CFI recap
- Study group goals
- Timeline
- Proposed text
- Steps forward

## CFI RECAP

- 146 gathered on Tuesday, Nov 7<sup>th</sup> for Consensus building
- Panel and Contributors:
  - John D'Ambrosia, Futurewei
  - David Ofelt, Juniper
  - Adam Healey, Broadcom
  - Kent Lusted, Intel
  - Beth Kochuparambil, Cisco
- Presentation given discussing market need, technical feasibility, and why now topics for 100Gb/s per lane for electrical interfaces and electrical PHYs.
  - [http://www.ieee802.org/3/cfi/1117\\_3/CFI\\_03\\_1117.pdf](http://www.ieee802.org/3/cfi/1117_3/CFI_03_1117.pdf)
  - No questions brought forward on the floor.
- Study group, or even Task Force, -like material presented already back in May 2017

*Thank you!*


## CFI RECAP – STRAW POLLS AND MOTION

- **Should a study group be formed** for “100Gb/s per Lane for Electrical Interfaces and PHYs”? **Yes: 137 No: 0 Abstain: 7**
- **I would participate** in a “100Gb/s per lane for Electrical Interfaces and PHYs” study group in IEEE 802.3. **Tally: 80**
- **My company would support participation** in a “100Gb/s per lane for Electrical Interfaces and PHYs” study group. **Tally: 45**
- Move that the IEEE 802.3 Working Group request the **formation of a Study Group** to develop a Project Authorization Request (PAR) and Criteria for Standards Development (CSD) responses for “100Gb/s per Lane for Electrical Interfaces and Electrical PHYs”. **Yes: 93 No: 0 Abstain: 5**

## STUDY GROUP

- 100Gb/s per Lane for Electrical Interfaces and Electrical PHYs Study Group - AKA 100G Electrical Lane SG, for short.
- Website: <http://www.ieee802.org/3/100GEL/index.html>
- Goal of Study Group is to study the problem and develop the following:
  - Objectives
  - Responses to The Criteria for Standard Development (CSD) – aka 5 Criteria
  - PAR
- Solving the problem, developing solutions, writing specifications are all Task Force activities

# Overview of IEEE 802.3 Standards Process (1/5)- Study Group Phase

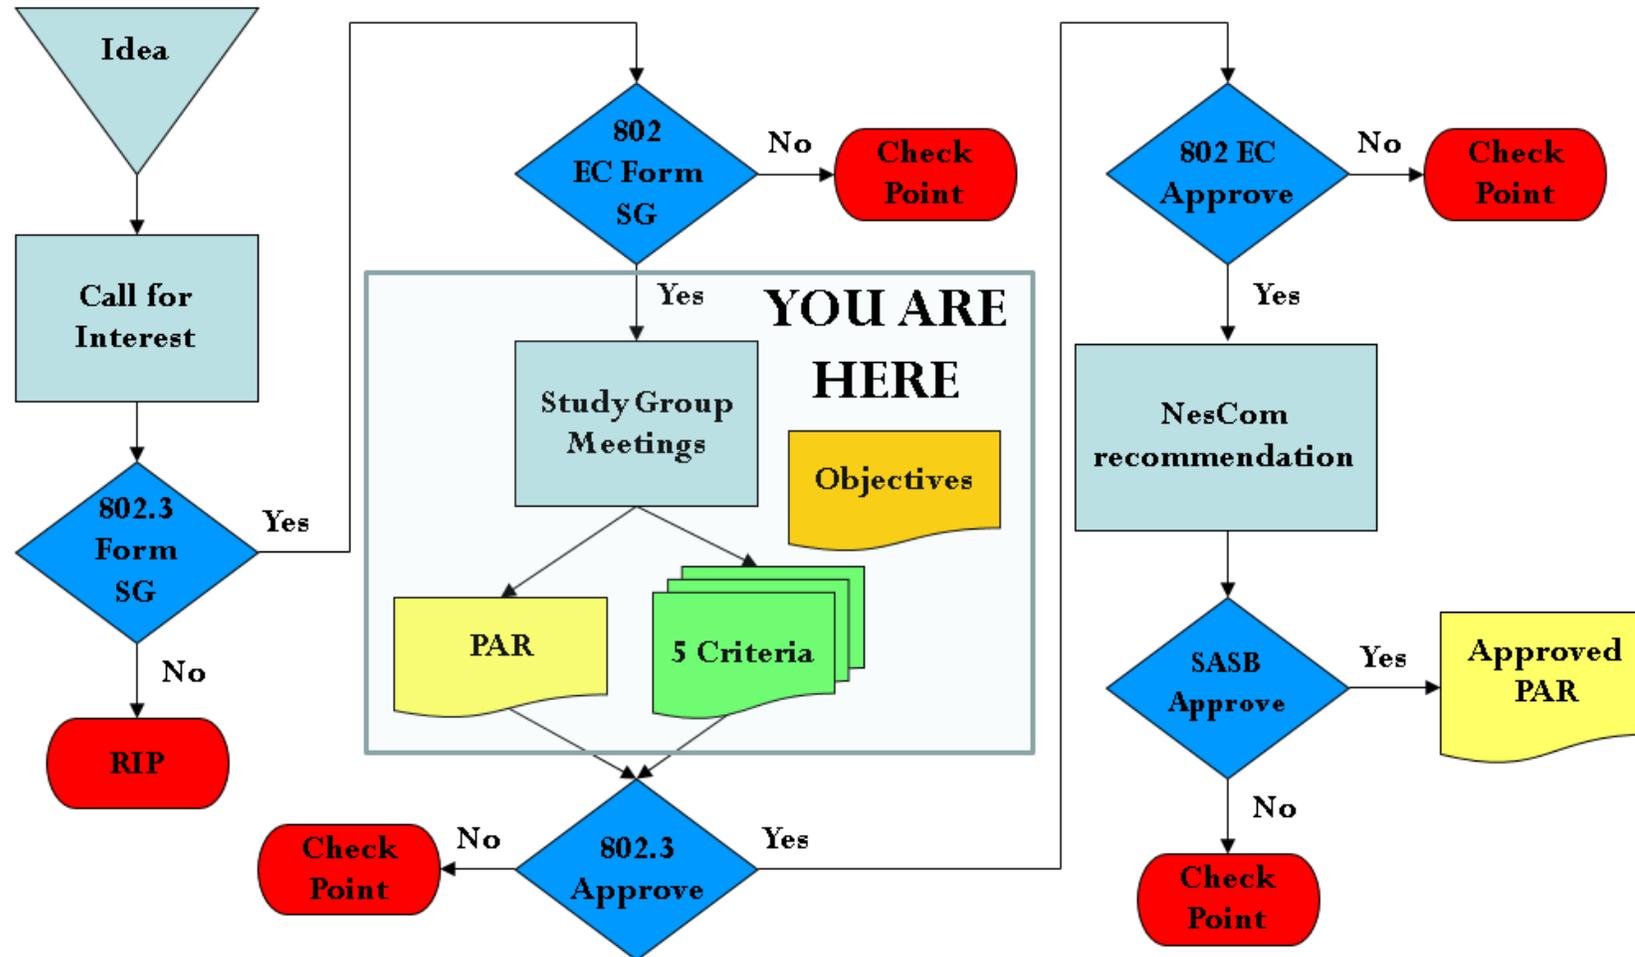

Note: At "Check Point", either the activity is ended, or there may be various options that would allow reconsideration of the approval.

# TIMELINE

## Quick Process

PAR, CSD, and Objectives in January

March Plenary

March 9<sup>th</sup> (Plenary)

**May Interim**

(starts May 21<sup>st</sup>)

## Approval Steps

Study Group

Working Group

WG Executive Committee

NesCom recommendation

Standards Board

**First Task Force Meeting**

## Slower process

PAR, CSD, and Objectives in March or May

July Plenary

July 13<sup>th</sup> (Plenary)

**Nov Plenary**

(misses Sept interim, 10-14<sup>th</sup>)

# FOUNDATIONAL OBJECTIVES

- Support a MAC data rates of 100, 200, and 400 Gb/s
- Support full-duplex operation only
- Preserve the Ethernet frame format utilizing the Ethernet MAC
- Preserve minimum and maximum Frame Size of current IEEE 802.3 standard
- Support a BER of better than or equal to  $10^{-12}$  at the MAC/PLS service interface (or the frame loss ratio equivalent) for single-lane 100Gb/s operation
- Support a BER of better than or equal to  $10^{-13}$  at the MAC/PLS service interface (or the frame loss ratio equivalent) for single-lane 100Gb/s operation
- Support optional Energy-Efficient Ethernet operation

## TOPICS FOR ADDITIONAL OBJECTIVES


- AUIs
- Backplane
- Copper cable

# POINTS OF CONVERGENCE AND CONTENTION

- **AUI Convergence:**
  - Compatibility with defined 100G/lane Optics – re-use of FEC and PCS
  - Power is critical
- **AUI Contention:**
  - Chip-to-chip inclusion
- **Proposed Objective:**
  - Define a single-lane 100 Gb/s Attachment User interface (AUI) for electrical operation with a total channel insertion loss of  $\leq$  “x” dB at “y” GHz.
  - Define a two-lane 200 Gb/s... total channel insertion loss of  $\leq$  “x” dB at “y” GHz.
  - Define a four-lane 400 Gb/s... total channel insertion loss of  $\leq$  “x” dB at “y” GHz.

# POINTS OF CONVERGENCE AND CONTENTION

- Backplane Convergence:
  - More freedom for PHY definition
- Backplane Contention:
  - Loss target: approx. 25dB or approx. 30dB – Do we agree on die-to-die loss?
  - Timeframe for convergence
- Proposed Objective:
  - Define a single-lane 100Gb/s PHY for operation over electrical backplanes with a total insertion loss of  $\leq$ “z” dB at 28GHz.
  - Define a two-lane 200Gb/s PHY... total insertion loss of  $\leq$ “z” dB at 28GHz.
  - Define a four-lane 400Gb/s PHY... total insertion loss of  $\leq$ “z” dB at 28GHz.

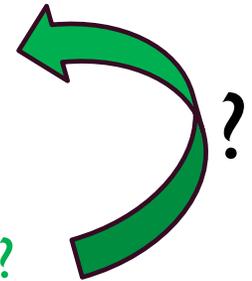

# POINTS OF CONVERGENCE AND CONTENTION

- Front-end Cable Convergence:
  - Passive Copper cable is most economic for previous loss budgets
- Front-end Cable Contention:
  - Usefulness of plausible reach: 3m→2m
  - Co-operation with defined PHYs, including FEC and PCS
- Proposed Objective:
  - Define a single-lane 100Gb/s PHY for operation over twin-axial copper cable with lengths up to at least “w” m.
  - Define a two-lane 100Gb/s PHY... up to at least “w” m.
  - Define a four-lane 100Gb/s PHY... up to at least “w” m.

## PROPOSED CSD TEXT

- KENT HAS A DRAFT IN A SEPARATE DECK FOR TODAY

## PROPOSED PAR - SCOPE

- STILL TO COME.


## NEXT STEPS

- Dec. 20<sup>th</sup> - First Official Ad Hoc
  - Straw polls \*\*need to draft
- Ad Hocs – 9:05-10:30am PST
  - Thurs. Dec 28<sup>th</sup>??
  - Wednesdays Jan 3<sup>rd</sup>, Jan 10<sup>th</sup> , Jan 17<sup>th</sup>
  - .3cd is Wednesday 10<sup>th</sup> at 8am, NGMMF is Thursday 11<sup>th</sup> at 8am
- Request for presentations due Friday, Jan 12<sup>th</sup>
- Presentations due Thursday, Jan 18<sup>th</sup>
- January Plenary – January 22-26
  - We are likely to be meeting Thursday & Friday ← NOT confirmed yet



# THANK YOU!

BACKUP SLIDES: PREVIOUS PROJECT OBJECTIVES



# 802.3ap initial objectives

- **Preserve the 802.3/Ethernet frame format at the MAC Client service interface.**
- **Preserve min. and max. frame size of current 802.3 Std.**
- **Support existing media independent interfaces.**
- **Support operation over a single lane across 2 connectors over copper traces on improved FR-4 for links consistent with lengths up to at least 1m.**
  - **Define a 1 Gb/s PHY**
  - **Define a 10 Gb/s PHY**
- **Consider auto-negotiation.**
- **Support BER of  $10^{-12}$  or better.**
- **Meet CISPR/FCC Class A.**

# 802.3ap objectives

- Preserve the 802.3/Ethernet frame format at the MAC Client service interface.
- Preserve min. and max. frame size of current 802.3 Std.
- Support existing media independent interfaces.
- Support operation over a single lane across 2 connectors over copper traces on improved FR-4 for links consistent with lengths up to at least 1m.
  - Define a 1 Gb/s PHY
  - Define a 10 Gb/s PHY
- Define a 4-lane 10Gb/s PHY for operation over the 802.3ap channel model.
- Consider auto-negotiation.
- Support BER of  $10^{-12}$  or better.
- Meet CISPR/FCC Class A.

# 802.3bj initial objectives

- Support full-duplex operation only
- Preserve the 802.3 / Ethernet frame format utilizing the 802.3 MAC
- Preserve minimum and maximum FrameSize of current 802.3 standard
- Support a BER of better than or equal to  $10^{-12}$  at the MAC/PLS service interface
- Define a 4-lane 100 Gb/s backplane PHY for operation over links consistent with copper traces on “improved FR-4” (as defined by IEEE P802.3ap or better materials to be defined by the Task Force) with lengths up to at least 1m.
- Define a 4-lane 100 Gb/s PHY for operation over links consistent with copper twin-axial cables with lengths up to at least 5m.

# 802.3bj objectives

- Support full-duplex operation only
- Preserve the 802.3 / Ethernet frame format utilizing the 802.3 MAC
- Preserve minimum and maximum FrameSize of current 802.3 standard
- Support a BER of better than or equal to  $10^{-12}$  at the MAC/PLS service interface
- Define a 4 lane PHY for operation over a printed circuit board backplane with a total channel insertion loss of  $\leq 35$  dB at 12.9 GHz\*\*
- Define a 4 lane PHY for operation over a printed circuit board backplane with a total channel insertion loss of  $\leq 33$  dB at 7.0 GHz\*\*
- Define a 4-lane 100 Gb/s PHY for operation over links consistent with copper twin-axial cables with lengths up to at least 5m.
- To define optional Energy-Efficient Ethernet operation for 100G Backplane and Twinaxial cable PHYs specified in P802.3bj\*
- To define optional Energy-Efficient Ethernet operation for 100GBASE-CR10\*\*\*
- To define optional Energy-Efficient Ethernet operation for 40GBASE-CR4 and 40GBASE-KR4\*\*\*

## Objectives 1 of 2

- Support full-duplex operation only
- Preserve the Ethernet frame format utilizing the Ethernet MAC
- Preserve minimum and maximum FrameSize of current IEEE 802.3 standard
- Support optional Energy-Efficient Ethernet operation
- Provide appropriate support for OTN
- Support a MAC data rate of 50 Gb/s and 100 Gb/s
- Support a BER of better than or equal to  $10^{-12}$  at the MAC/PLS service interface (or the frame loss ratio equivalent) for 50 Gb/s and 100 Gb/s operation
- Support a MAC data rate of 200 Gb/s
- Support a BER of better than or equal to  $10^{-13}$  at the MAC/PLS service interface (or the frame loss ratio equivalent) for 200 Gb/s operation

## Objectives 2 of 2

### 50 Gb/s Ethernet PHYs

- Define single-lane 50 Gb/s PHYs for operation over
  - copper twin-axial cables with lengths up to at least 3m.
  - printed circuit board backplane with a total channel insertion loss of  $\leq 30\text{dB}$  at 13.28125 GHz.
  - MMF with lengths up to at least 100m
  - SMF with lengths up to at least 2km
  - SMF with lengths up to at least 10km

### 100 Gb/s Ethernet PHYs

- Define a two-lane 100 Gb/s PHY for operation over
  - copper twin-axial cables with lengths up to at least 3m.
  - printed circuit board backplane with a total channel insertion loss of  $\leq 30\text{dB}$  at 13.28125 GHz.
  - MMF with lengths up to at least 100m
- Define a single lane 100 Gb/s PHY for operation over duplex SMF with lengths up to at least 500 m, consistent with IEEE P802.3bs Clause 124

### 200 Gb/s Ethernet PHYs

- Define four-lane 200 Gb/s PHYs for operation over
  - copper twin-axial cables with lengths up to at least 3m.
  - printed circuit board backplane with a total channel insertion loss of  $\leq 30\text{dB}$  at 13.28125 GHz.
- Define 200 Gb/s PHYs for operation over MMF with lengths up to at least 100m

## 802.3bs objectives

- Support a MAC data rate of 200 Gb/s
- Support a MAC data rate of 400 Gb/s
- Support a BER of better than or equal to  $10^{-13}$  at the MAC/PLS service interface (or the frame loss ratio equivalent)
- Support full-duplex operation only
- Preserve the Ethernet frame format utilizing the Ethernet MAC
- Preserve minimum and maximum FrameSize of current Ethernet standard
- Provide appropriate support for OTN
- Provide physical layer specifications which support 200 Gb/s operation over:
  - At least 500 m of 4-lane parallel SMF
  - At least 2 km of SMF
  - At least 10 km of SMF
- Provide physical layer specifications which support 400 Gb/s operation over:
  - At least 100 m of MMF
  - At least 500 m of SMF
  - At least 2 km of SMF
  - At least 10 km of SMF
- Specify optional Energy Efficient Ethernet (EEE) capability
- Support optional Attachment Unit Interfaces for chip-to-chip and chip-to-module applications

