

# Exemplary Parameter Table A (1 of 5)

## Downstream

### System Description

HFC D/S Spectrum	1.0 GHz
Cascade Depth	N+6
Channel Loading	48 Analog + 75 Digital
Optical Architecture	Linear Optics 1310 nm, nominal link length EPoC Transport
Home Architecture	Up to max drop length & 4-way splitter

# Exemplary Parameter Table A (2 of 5) Downstream


	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependency
Spectrum	1	<b>Frequency range</b>	54 MHz - 1 GHz		
	2	<b>OFDM Bandwidth</b>	192 MHz		
RF Level	3	<b>OFDM Power at CPE Input (dBmV)</b>	15 dBmV, 100 ft, 2-way	10 dBmV, 150 ft, 4-way	Notes 2-4
			6 MHz BW	-2	
			24 MHz BW	4	
			96 MHz BW	10	
			192 MHz BW	14	
SNR	4	<b>SCN Ratio (Signal to Composite Noise Ratio)</b>	43	40	Note 5 Note 6 Reference Basis 6 MHz
			Variation over 6 MHz BW (dB)	N/A	
			Variation over 24 MHz BW (dB)	1.5	
			Variation over 96 MHz BW (dB)	2.5	
			Variation over 192 MHz BW (dB)	3.0	

# Exemplary Parameter Table A (3 of 5) Downstream

	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependency
Interference	5	<b>CTB Interference (20 kHz BW)</b>			Note 7-8
<i>Narrowband</i>		# of interfered subcarriers @ 30-35 dBc	0%	1%	
		35-40	1%	0%	
		40-45	0%	0%	
		>45	0%	0%	
	6	<b>CSO Interference (20 kHz BW)</b>			Note 9
		# of interfered subcarriers @ 30-35 dBc	0%	2%	
		35-40	0%	0%	
		40-45	2%	0%	
		45-50	0%	0%	
		>50	0%	0%	
<i>LTE</i>	7	<b>LTE Interference</b>			
	D/S	Bandwidth (MHz)	10	40	
		Level, dBc (PSD)	-30	-30	
	U/S	Bandwidth (MHz)	10	10	
		Level, dBc (PSD)	-40	-5	
<i>Wideband</i>	8	<b>Additive Interference (other)</b>			Additional bands TBD
		Range of dBc	-41	-29	CL 1997 Report
		Percentage of effected subcarriers	1	1	
	9	<b>Burst Interference</b>			Note 10
		Bandwidth (MHz)	30	TBD	
		Level, dBc (PSD)	-20	-5	
		Duration (usec)	16	25	
		Period (Hz)	Inrequent	10	
	10	<b>Impulse (white) Noise</b>			Laser Clipping
		Level, dBc (PSD)	-25	-25	Note 11
		Duration (nsec)	0.5	0.5	
		Period (kHz)	10	10	


# Exemplary Parameter Table A (4 of 5) Downstream

	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependency
<b>Freq Response</b>					
<i>Amplitude</i>	11	<b>Amplitude Slope</b>			Note 12
			(dB/MHz)	0.01	0.02
	12	<b>Amplitude Variation</b>			
			(dB pk-pk/6 MHz)	1.5	6
			(dB pk-pk/24 MHz)	3.5	8
			(dB pk-pk/192 MHz)	6	11
			(dB pk-pk/Total DS BW)	10	15
<i>Phase</i>	13	<b>Group Delay Variation, nsec</b>			
		Over 24 MHz			
			Mid Band	50	100
			Band Edge (24 MHz)	290	340
		Over 192 MHz			
			Mid Band	400	800
			Band Edge (24 MHz)	640	1040
<i>Echo</i>	14	<b>Echo Profile, dBc</b>		99%	SCTE-40
			.5 usec	-20	-10
			1 usec	-25	-15
			1.5 usec	-30	-20
			2 usec	-35	
			3 usec	-40	
			4.5 usec	-45	-30
			5 usec	-50	
<b>Spurious Modulation</b>	15	<b>AM/Carrier hum modulation</b>	3%	5%	

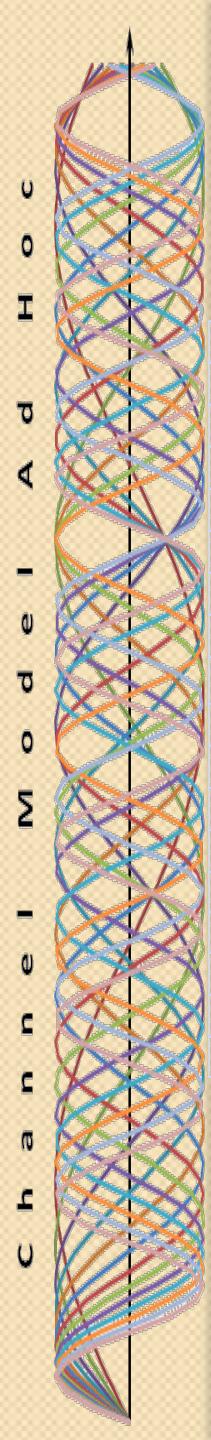

# Exemplary Parameter Table A (5 of 5) Downstream

Notes			
1	If not defined otherwise, assume typically behaving link but where the behavior is the worst (freq, location)		
2	Frequency dependence of coax for broadband calculations: Loss B (dB) = Loss A (dB) x SQRT(B/A)		
3	Reference virtual port level for 6 MHz signal at 1 GHz; 15 dBmV Tap port level, 100 ft drop, 2-way splitter		
4	(Max Freq - OFDM BW) spectrum range used for drop loss		
5	Small drop slope effect on calculation		
6	SCN includes HFC geography impact (location in cascade depth)		
7	50 kHz Subchannel Reference, Live Video, fully contained within subchannel		
	Subcarriers with Interference (50 kHz subcarriers): Every 70 subcarriers, a cluster of three interferers: $I_0$ , $I_0 + 25$ kHz, $I_0 - 25$ kHz		
8	Typ = CTB/CSO Worst Case Freq; Good CTB/CSO in low-distortion band, Analog contiguous at low end of band		
	NCTA measurement method (avg); Error rate simulation should account for PAR and peak durations		
9	Worst spectrum regions for CTB and CSO are not the same		
10	D/S Burst Characterization in process; BW based on percentage of errored carriers in 8-Channel wide DOCSIS CM Duration based on large scale CM sweep of UCER with known interleaver settings; Levels per ReDesign channel model		
11	Laser Clipping PSD captured in SCN for out-of-band EPoC Signals		
12	Typical tilt, first tap, not equalized, 50 ft drop assumed (Minimum drop impact)		
13	Echo mask range for a Single Dominant echo - Does not imply an assumptions about multiple echoes.		
14	Meas@700-800 MHz, representative of 99% of modems		

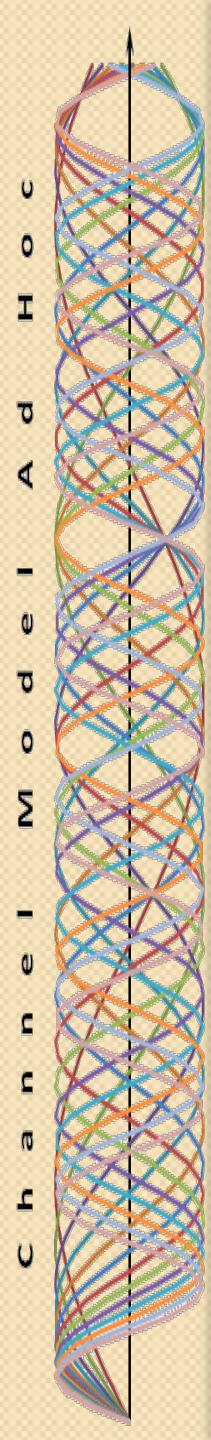

# Exemplary Parameter Table B (1 of 4)

## Downstream (Notes not repeated)

### System Description


HFC D/S Spectrum	1.0 GHz
Cascade Depth	N+3
Channel Loading	All Digital
Optical Architecture	Linear Optics 1310 nm, EPoC RF Coupled after Node
Home Architecture	Up to max drop length & 4-way splitter

# Exemplary Parameter Table B (2 of 4) Downstream

	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependency
Spectrum	1	<b>Frequency range</b>	54 MHz - 1 GHz		
	2	<b>OFDM Bandwidth</b>	192 MHz		
RF Level	3	<b>OFDM Power at CPE Input (dBmV)</b>	15 dBmV, 100 ft, 2-way	10 dBmV, 150 ft, 4-	Notes 2-4
		6 MHz BW	-2	-14	
		24 MHz BW	4	-8	
		96 MHz BW	10	-2	
		192 MHz BW	14	2	Note 5
SNR	4	<b>SCN Ratio (Signal to Composite Noise Ratio)</b>	45	41	Note 6
		Variation over 6 MHz BW (dB)	N/A	N/A	Reference Basis 6 MHz
		Variation over 24 MHz BW (dB)	1.5	3.5	
		Variation over 96 MHz BW (dB)	2.5	4.5	
		Variation over 192 MHz BW (dB)	3.0	5.0	

# Exemplary Parameter Table B (3 of 4) Downstream


	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependency
<b>Interference</b>	5	<b>CTB Interference (20 kHz BW)</b>	N/A	N/A	Note 7-8
<b>Narrowband</b>		# of interfered subcarriers @ 30-35 dBc			
	6	<b>CSO Interference (20 kHz BW)</b>	N/A	N/A	Note 9
		# of interfered subcarriers @ 30-35 dBc			
	7	<b>LTE Interference</b>			
D/S		Bandwidth (MHz)	10	40	
		Level, dBc (PSD)	-30	-30	
U/S		Bandwidth (MHz)	10	10	
		Level, dBc (PSD)	-40	-5	
	8	<b>Additive Interference (other)</b>			Additional bands TBD
		Range of dBc	-41	-29	CL 1997 Report
		Percentage of effected subcarriers	1	1	
<b>Wideband</b>	9	<b>Burst Interference</b>			Note 10
		Bandwidth (MHz)	30	TBD	
		Level, dBc (PSD)	-20	-5	
		Duration (usec)	16	25	
		Period (Hz)	Infrequent	10	
	10	<b>Impulse (white) Noise</b>			
		Level, dBc (PSD)	N/A	N/A	Note 11
		Duration (nsec)	N/A	N/A	
		Period (kHz)	N/A	N/A	

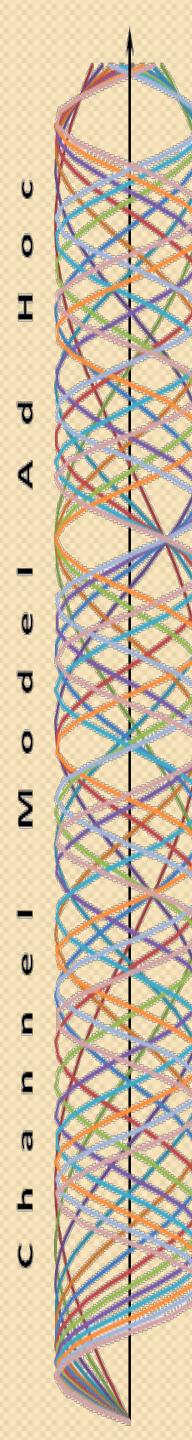

# Exemplary Parameter Table B (4 of 4)

## Downstream


	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependency
<b>Freq Response</b>					
<b>Amplitude</b>	11	<b>Amplitude Slope</b>			Note 12
			dB/MHz	0.01	0.02
	12	<b>Amplitude Variation</b>			
			(dB pk-pk/6 MHz)	1.5	6
			(dB pk-pk/24 MHz)	3.5	8
			(dB pk-pk/192 MHz)	6	11
			(dB pk-pk/Total DS BW)	10	15
<b>Phase</b>	13	<b>Group Delay Variation, nsec</b>			
		Over 24 MHz			
			Mid Band	50	100
			Band Edge (24 MHz)	290	340
		Over 192 MHz			
			Mid Band	400	800
			Band Edge (24 MHz)	640	1040
<b>Echo</b>	14	<b>Echo Profile, dBc</b>	99%	SCTE-40	Note 13-14
		.5 usec	-20	-10	
		1 usec	-25	-15	
		1.5 usec	-30	-20	
		2 usec	-35		
		3 usec	-40		
		4.5 usec	-45	-30	
		5 usec	-50		
<b>Spurious Modulation</b>	15	<b>AM/Carrier hum modulation</b>	3%	5%	

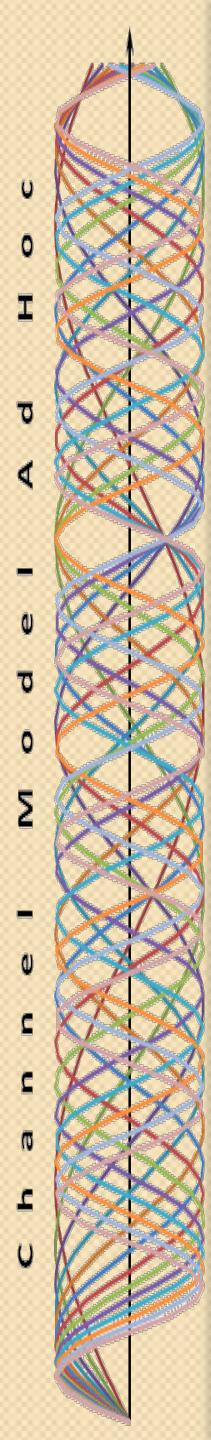

# Exemplary Parameter Table C (1 of 5)


## Upstream

System Description	
HFC U/S Spectrum	85 MHz
Node Architecture	N+0
Channel Loading	Remote Tx/Rx
HE Architecture	N/A
Premise Architecture	Two Way Combining

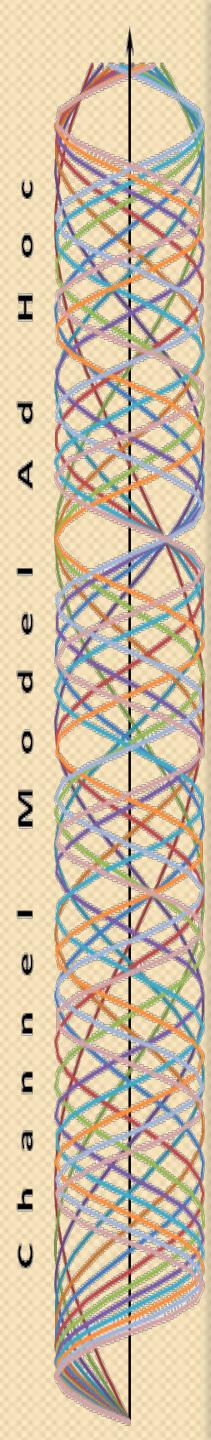


# Exemplary Parameter Table C (2 of 5) Upstream

	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependencies
Spectrum	1	OFDM Bandwidth	48		
	2	Frequency range	37-85 MHz		
Path Loss	3	Path Loss	44	50	Max loss to first active
		Variation Freq, 6.4 MHz BW	1	1	Note 1
		Variation Freq, 24 MHz BW	2.5	2	
		Variation Freq, 80 MHz BW	5	5	
Added Noise	4	Input Noise PSD	N/A	N/A	

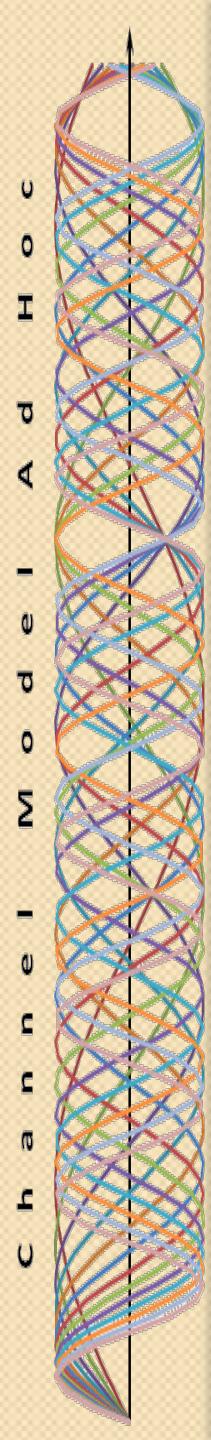


# Exemplary Parameter Table C (3 of 5) Upstream

	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependencies
<b>Interference</b>	<b>5</b>	<b>FM Band Interference</b>	N/A	N/A	Overload concern only
<b>Narrowband</b>		Bandwidth	Out of Band	Out of Band	
		Level, dBc (PSD)	-40	TBD	Note 2
	<b>6</b>	<b>Common Path Distortion</b>			
<b>Wideband</b>		dBc	N/A	-32	50 kHz subcarriers
		% effected subcarriers	N/A	3%	
	<b>7</b>	<b>Other Known Bands</b>	TBD		New Upstream
<b>Burst Interference</b>		dBc	-50	-10	Note 3
		% effected subcarriers	1%	0.5%	50 kHz subcarriers
	<b>8</b>				Note 4
<b>Impulse (white) Noise</b>		Bandwidth (MHz)	TBD	TBD	Non-white characteristics (Note 5)
		Level, dBc (PSD)	0	-10	
		Duration (usec)	1	10	
<b>9</b>		Period (Hz)	1000	1000	
		<b>Impulse (white) Noise</b>	N/A	N/A	
		Level, dBc (PSD)			
		Duration (nsec)			
		Period (kHz)			

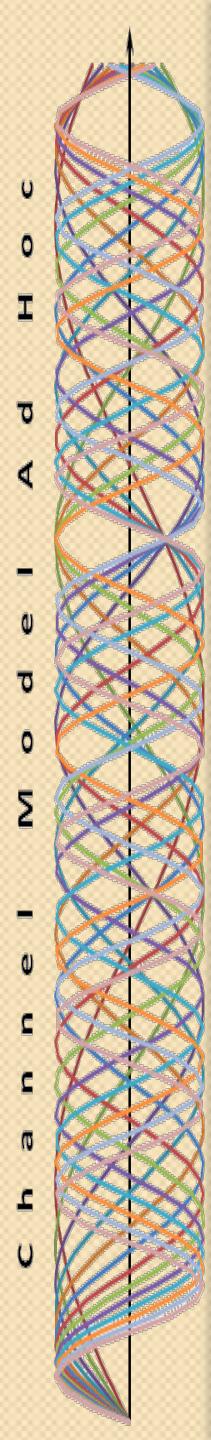

# Exemplary Parameter Table C (4 of 5) Upstream

	#	Parameters	Typical <sup>1</sup>	Limit	Notes/Dependencies	
<b>Freq Response</b>						
<b>Amplitude</b>	10	<b>Amplitude Slope</b>	N/A	N/A	Captured in Path Loss Range	
	11	<b>Amplitude Variation</b>			SCTE Definition, Echo not included	
<b>Phase</b>	12	(dB pk-pk/24 MHz)	1	2.5		
		(dB pk-pk/48 MHz)	1.5	4.0		
<b>Echo</b>	13	(ns/MHz)				
		Over 24 MHz	12	85		
		Over 48 MHz	82	100		
		<b>Delay Spread Profile, dBc</b>			Note 6-7	
		.5 usec	-15	-10		
<b>Spurious Modulation</b>		1 usec	-20	-20		
		1.5 usec	-25	-30		
		2 usec	-30	-30		
		2.5 usec	-35	-30		
		3 usec	-40	-30		
		4 usec				
	14	<b>AM/Carrier hum modulation</b>	5%	7%		

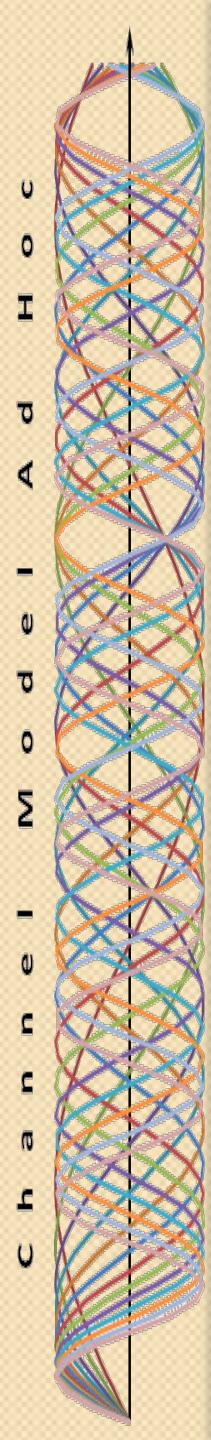

# Exemplary Parameter Table C (5 of 5) Upstream

Notes	
1	Path Loss adopted for consistency although return path
2	Measured samples in MSO location of high field strength environment
3	Projected (for 50 kHz) from acceptable D/S interference level for analog video band (now upstream band); single dominant interferer and ingress
4	U/S burst characterization in process; Ref CableLabs 1997 Report "Characterization of Upstream Transient Impairments on Cable"
5	No linear optical return - no U/S Laser Clipping (white) impairment
6	Measured Upstream CM (97% criteria) extrapolated to band (30 MHz measured to 100 MHz)
7	Echo mask range for a Single Dominant echo - does not imply an assumptions about multiple echoes

# THANK YOU

C h a n n e l   M o d e l   A d   H o c

