

faw_valid analysis

Mike A. Sluyski – Cisco

Sluyski_3cw_02_220523

Framing in the presence of Bit-Errors


Sal, (aligned and in locked mode): The system is frame aligned and it believes so.

Sas, (aligned but in search mode): The system is frame aligned but it does not believe so.


Sms, (misaligned and in search mode): The system is frame misaligned and it is searching for alignment.

Sml (misaligned but in locked mode): The system is frame mis-aligned but it assumes alignment.

The objective of frame alignment is to have very short Time to Reframe (TRF) and Time to Out-of-frame (TOF) but with very long Time to False Frame (TFF) and Time to Mis-frame (TMF) since transitions towards the two erroneous states, Sml and Sas, should be avoided as much as possible.

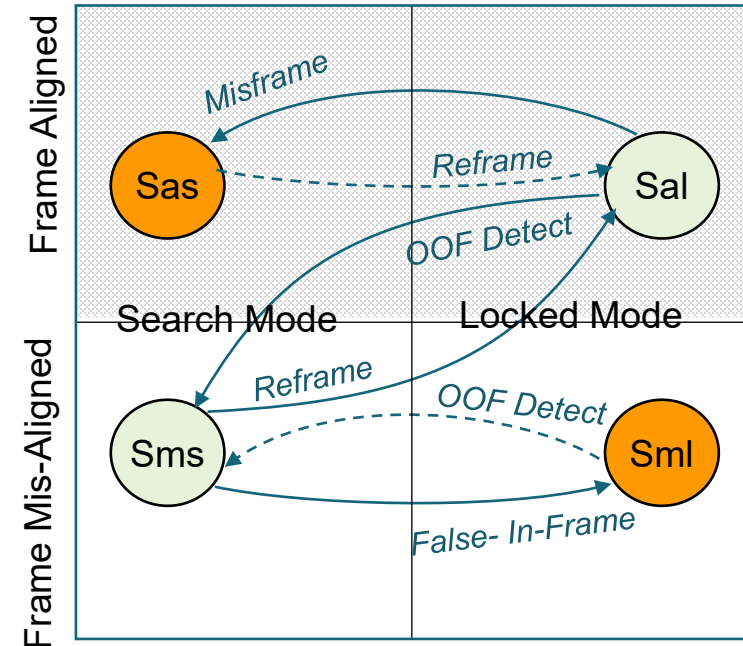

Probability of hitting FAW

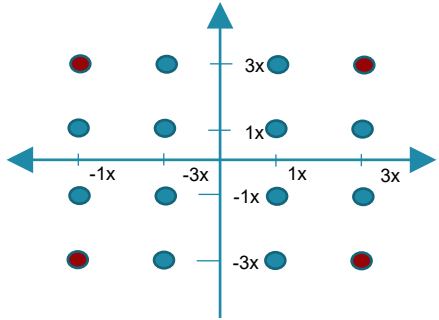

$$\frac{E_{b,f}}{N_o} = \frac{E_{b,a}(\frac{18}{10})}{N_o}$$

- FAW symbols, differentially modulated

P_f : Fraction of FAW symbols in a frame -
for 400ZR with CFEC = $(23+11)/(49*3712) = 1.8693e-04$

$\gamma_f = E_b/N_o$ for FAW symbols


$\gamma_a = E_b/N_o$ for non FAW symbols

$$\gamma_f = \gamma_a \frac{36}{(1-P_f)10 + P_f 18} = 36 / ((1 - 1.8693e-04) * 10 + 1.8693e-04 * 18) = 3.5995$$

$$\gamma_f = 5.5624 \text{ dB}$$

Probability of hitting FAW for threshold:

$$k = \sum_{i=k}^{33*2} \binom{33*2}{k} (1 - BER)^k BER^{1-k} \text{ where } BER = 2.12e-5$$

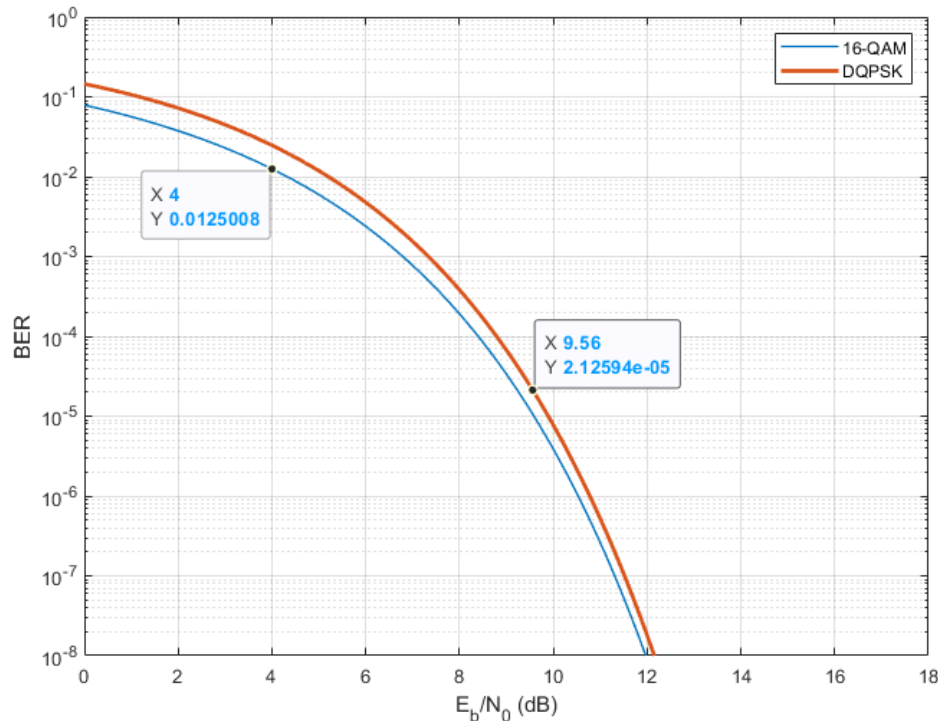


In-FAW(faw_valid)/out-of-FAW probability analysis

Frame Alignment Calculation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
-----------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Thank You

Backup - Derivation¹

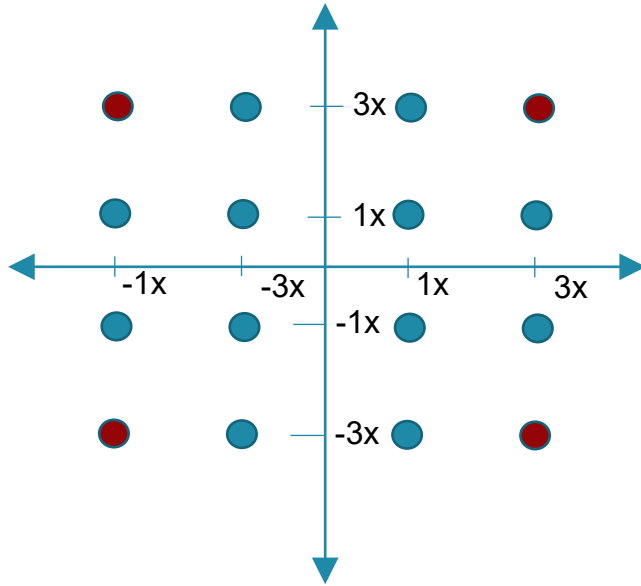

¹Derivations based on “Frame Alignment in a Digital Carrier System” – DooWhan Choi; February 1990, IEEE Communications.

Average power for all symbols = 10

Average power for FAW symbols = 18

Assume $T=1$ $E_{s,f} = 18$ then $\gamma_f = \frac{E_{b,f}}{N_o} = \frac{18}{2N_o}$

For all symbols $\frac{E_{b,a}}{N_o} = \frac{(1-P_f)10 + P_f18}{4N_o}$

$$N_o = \frac{(1-P_f)10 + P_f18}{4E_{b,a}/N_o} = \frac{(1-P_f)10 + P_f18}{4\gamma_a}$$

4 here is because we have 4 bits/symbol

$$\gamma_f = \frac{18 \times 4}{2 \frac{(1-P_f)10 + P_f18}{4\gamma_a}} = \frac{36\gamma_a}{(1-P_f)10 + P_f18}$$

$$\frac{E_{b,f}}{N_o} = \frac{E_{b,a}(\frac{18}{10})}{N_o}$$

Back-up Calculations

- $\gamma_f = \frac{E_{b,f}}{N_o}$
- $\gamma_a = \frac{E_{b,a}}{N_o}$
- $SNR_f = 2 \frac{E_{b,f}}{N_o} = 2\gamma_f$
- $SNR_a = \frac{E_{s,a}}{N_o} = 4 \frac{E_{b,a}}{N_o} = 4\gamma_a$
- $E_{s,f} = 3^2 + 3^2 = 18 = 2E_{b,f}$
- $E_{s,a} = (1 - P_f)10 + P_f 18$
- $SNR_a = \frac{(1 - P_f)10 + P_f 18}{N_o} = 4\gamma_a$